

## FLOOD LIGHT WALL-MOUNTING ARM INSTALLATION INSTRUCTIONS

### IMPORTANT

**READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.**

All fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety.


THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

**WARNING - RISK OF ELECTRIC SHOCK. DISCONNECT MAIN POWER AT FUSE OR CIRCUIT BREAKER BEFORE INSTALLING OR SERVICING THE FIXTURE.**

### Installation

**CAUTION: Use mounting hardware appropriate for the mounting surface and weight of the fixture.**

1. Drill four holes in the wall with an electric drill.
2. Attach the foam to the wall. Then put four expansion pipes into the drilled holes.
3. Make wire supply connections between ARM set and the wall.
4. Fix Base and ARM set firmly to wall through (4) Mounting Holes with four expansion screws.
5. Make wire supply connections between ARM and the fixture.
6. Mount fixture on other end of ARM. Works with any 1/2" NPT threaded mounting.
7. To ensure weatherproof seal, apply silicon caulk around edge of mounting plate to make it fully waterproof.

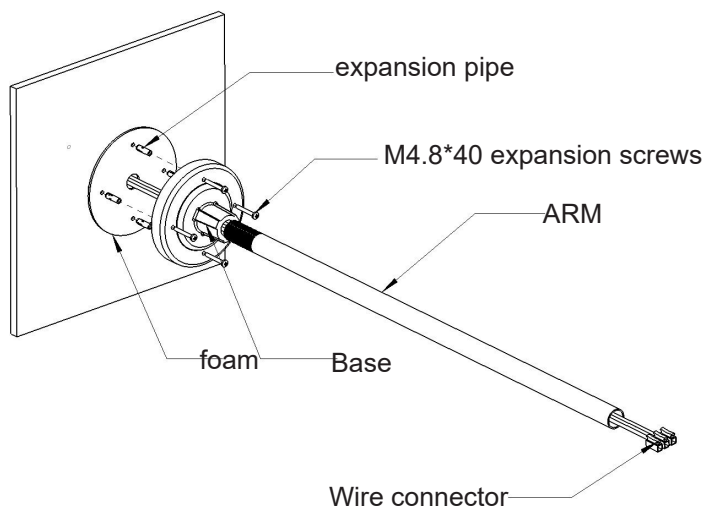

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.