



Power & CCT Selectable

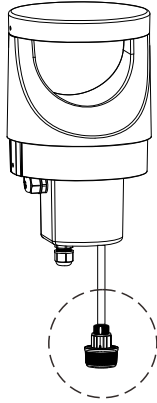


①



②

* Roughly ratio, subject to change to various drivers.

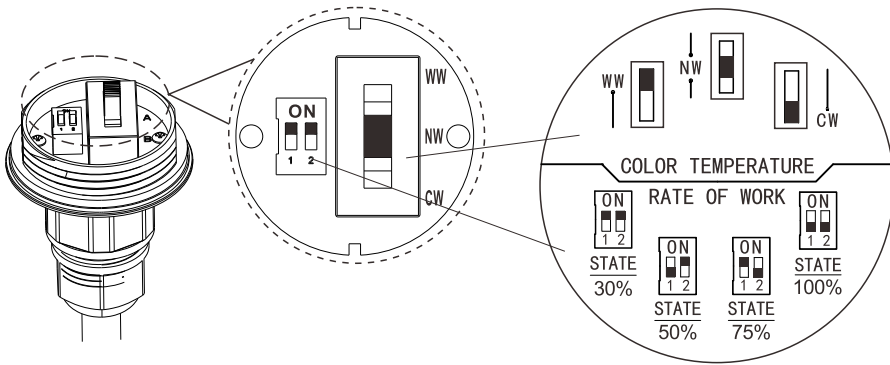

AC cords

L	brown	black
N	blue	white
⊕	yellow/green	green

DIM cords

Note: color for dim cords subject to the cable label on luminaire




Warning! Do not wire dim cord to high voltage, or dim function will fail.


- This luminaire can be outdoor use.
- For type Y attachments: if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Instruction Manual

Packing List		
	Base plate templates	1PCS
	Screw fixing plate	1PCS
	Screw M5*16	5PCS
	Screw M10	3PCS
	Nut M10	6PCS
	Washer M10	6PCS
	Locking Washers M10	3PCS

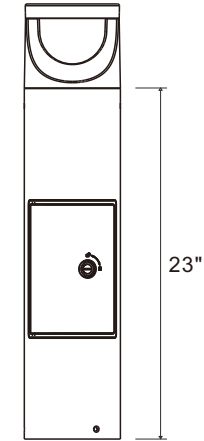

Physical Dimensions(inch)

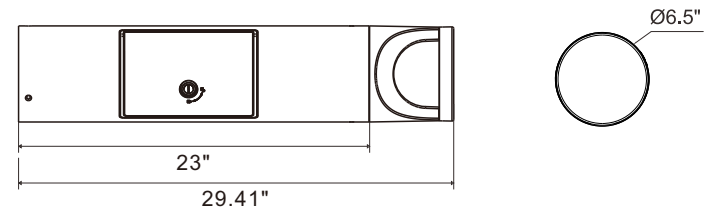

Product Specifications	22W	GFCI Outlet
Input Voltage	120-277Vac	20A / 125Vac
Power Frequency	50 / 60 Hz	60 Hz
Size	Ø6.5"x29.41"	Ø6.5"x23"
Net Weight	6.61±0.3kg(14.57±0.66Lbs)	4.4±0.3kg(9.70±0.66Lbs)
Working Temperature	-30°C to +50°C(-22°F to +122°F)	
Storing Temperature	-40°C to +70°C(-40°F to +158°F)	

Installation

