

# INSTALLATION MANUAL

## IMPORTANT SAFETY PRECAUTIONS



Before you begin, read these instructions completely and carefully.

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire's ventilation by covering with material that will cause luminaire to overheat and potentially shorten the life span.
- Ensure LED luminaire has the correct polarity before installation.




**WARNING:** To reduce the risk of personal injury or property damage from fire, electrical shock, falling parts, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions. This product should be installed, inspected and maintained by a qualified and licensed electrician. Installation of luminaire must be in accordance with NEC and local code requirements.


## PACKAGE CONTENTS

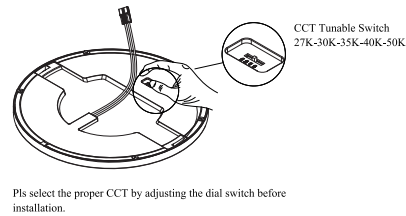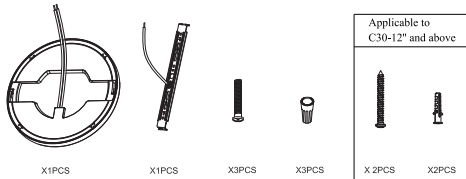


## Installation




1. After removing the panel light from the packaging box, lift the translucent waterproof silicone cover on the back of the fixture. (Skip this step if the fixture model is non-waterproof or single-color-temperature version.)




2. Adjust the power selection switch to the desired wattage setting. For color-temperature adjustable models, set the color-temperature switch to the preferred level. (Skip color-temperature adjustment for single-color-temperature versions.) After completion, reattach the translucent waterproof silicone cover. (Skip this step for non-waterproof or single-color-temperature models.)




3. Power off the electricity supply, then secure the mounting bracket to the octagonal box using the provided screws from the accessory kit.




4. Install the alabaster stone into the decorative trim ring.




5. Align the hanging tabs on both sides of the decorative trim ring with the corresponding grooves on the fixture, then assemble them together.




6. Press the hanging tabs firmly against the back of the fixture using fingers or appropriate tools.



7. Connect the power cable of the assembled fixture (with decorative trim ring) to the mains electricity using twist-type wire connectors.



8. Move the wired fixture closer to the junction box, tuck all wires into the octagonal box, align the triangular mark on the fixture's side with the mounting bracket, and rotate the fixture into the bracket following the arrow direction.



9. Turn on the power supply, conduct a lighting test, and complete the installation after successful verification.

## DIMMER RECOMMENDATION

LEVITON:	DSL06-1LZ, DW6HD, IPL06-10Z, 6674, 6615-POW
LUTRON:	DVCL-153P-WH, DVSCCL-153P-ES, DVCL-253P-WH, DVCLV-300P-WH, PD-6WCL, CTCL-153P-IV, SELV-300P-IV, AYCL-253P-WH, MACL-153M-WH, DVWCL-153PH-WH