




POST DISK LIGHT

WESTGATE
THE FUTURE IS HERE... AND IT'S QUITE BRIGHT!



Installation Instructions



Physical Dimensions(Unit: mm/inch)




Twist Lock Photocell(Optional)

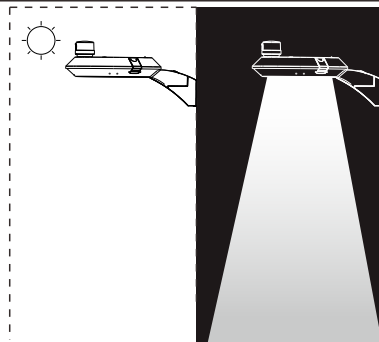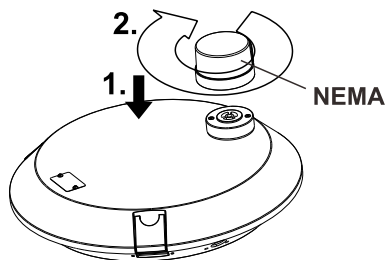

CCT+ 4 Power Selectable(Optional)

Power selectable





30W-60W(3 CCT)

3CCT selectable




75W(2 CCT)

2CCT selectable




Microwave Sensor Bracket Kits(Optional)

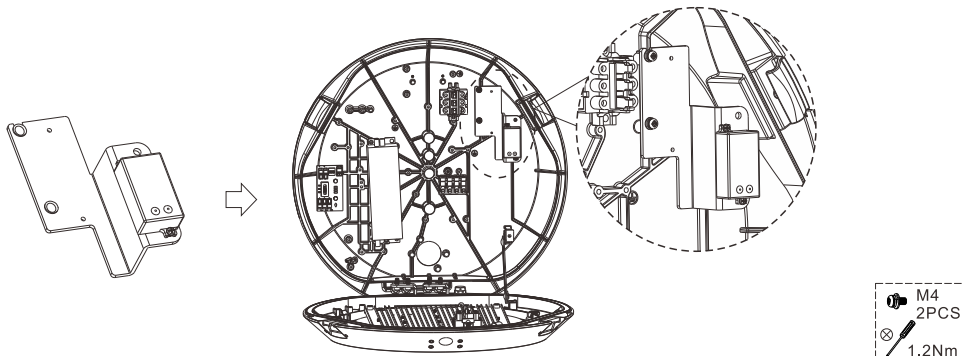


AC Cable Installation Procedure


1.Remove screw and silicone plug

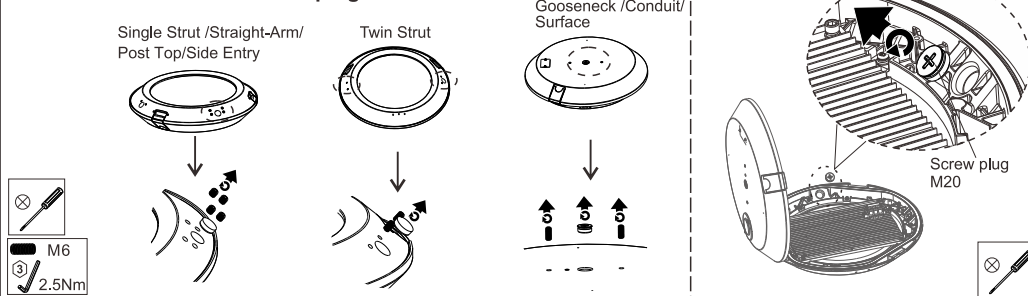



3.

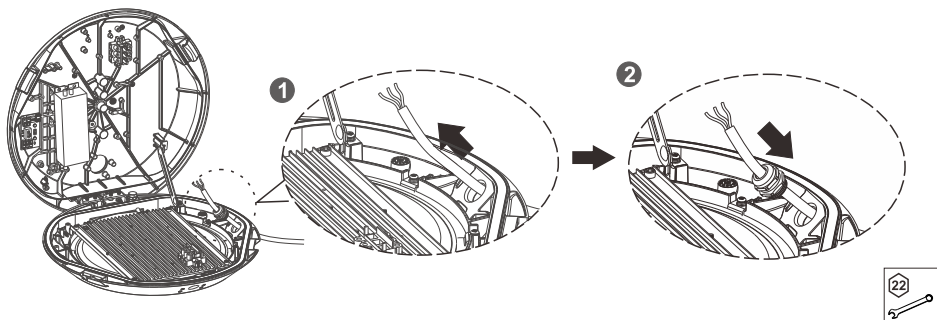

4.

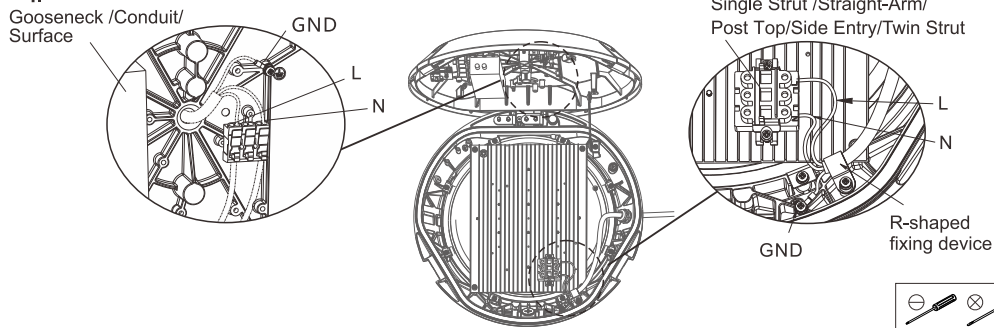


Single Strut Mounting (Unit: mm/inch)




1. ✂

M8
2PCS
8.0Nm




2. ✂


M4
2PCS
1.2Nm



3. ✂





4. ✂




M10x16
2PCS
17Nm

Twin Strut Mounting (Unit: mm/inch)




1. ✂

M6
4PCS
8.0Nm




2. ✂


M4
4PCS
1.2Nm



3. ✂




4. ✂




M10x16
2PCS
17Nm


Straight-Arm Mounting (Unit: mm/inch)

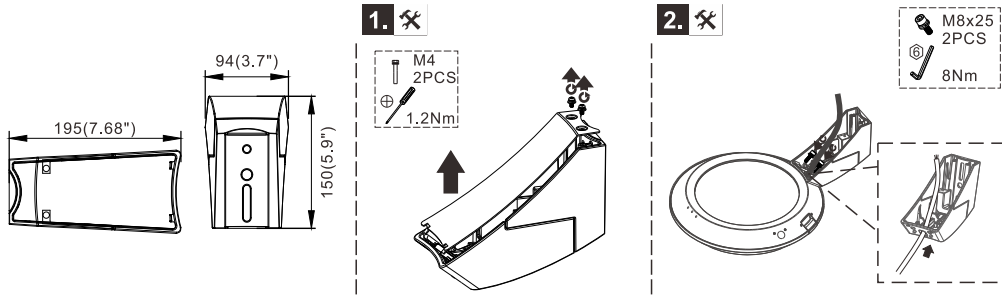


3. ✂ Square pole installation

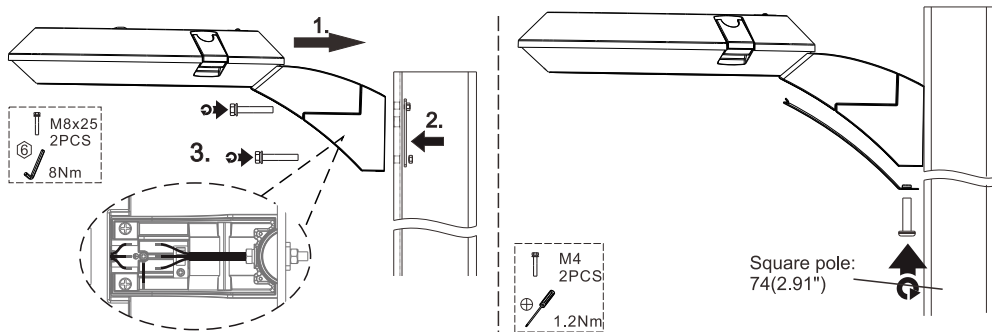


Round pole installation

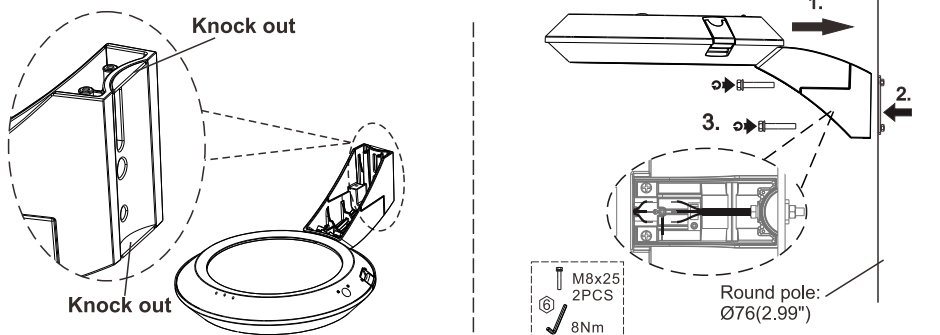


Wall Mounting (Unit: mm/inch)

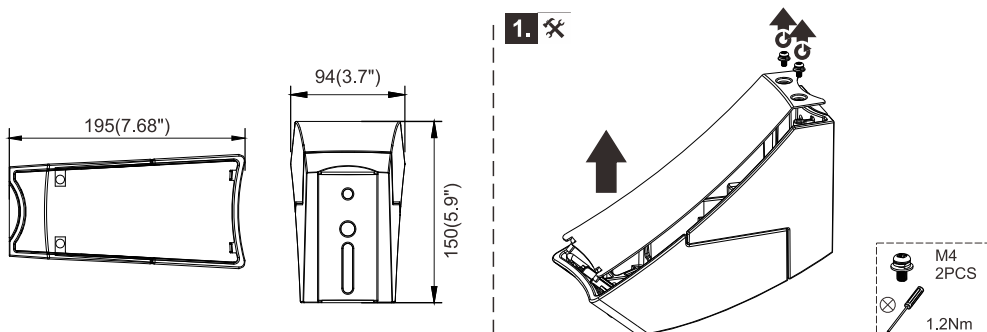


2. ✖

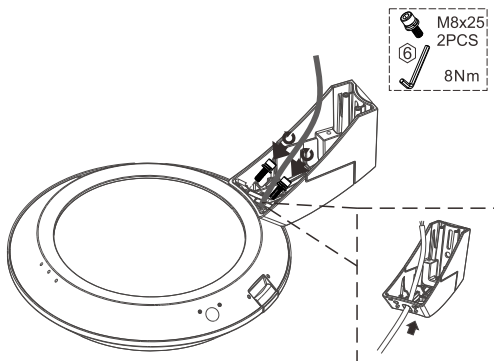


3. ✖

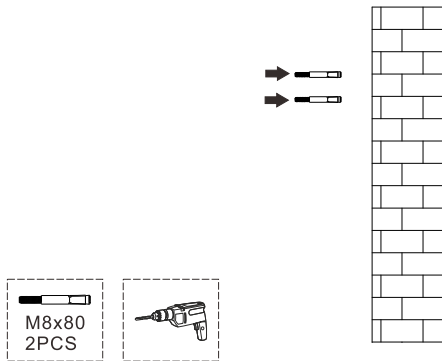


4. ✖

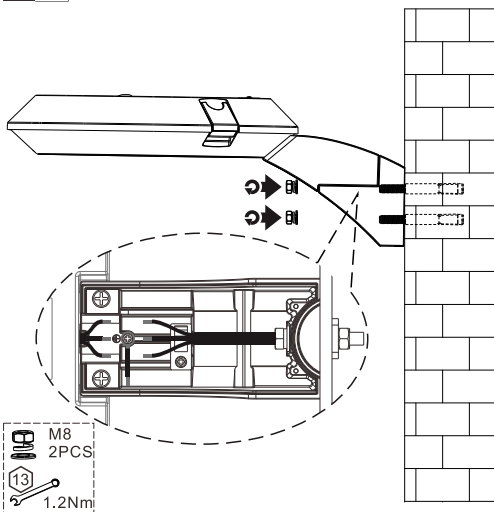

5. ✖

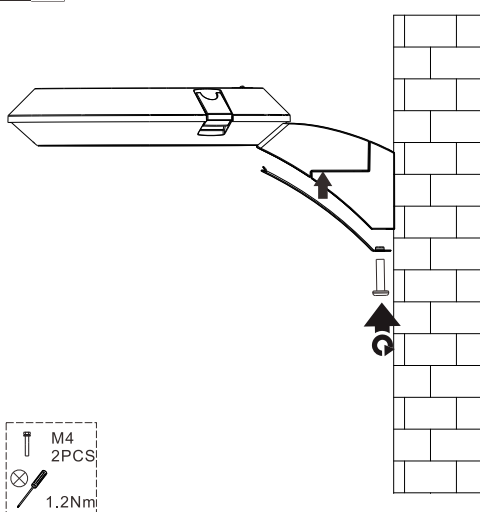


Post Top Mounting/Side Entry Mounting (Unit: mm/inch)




1. ✖

①

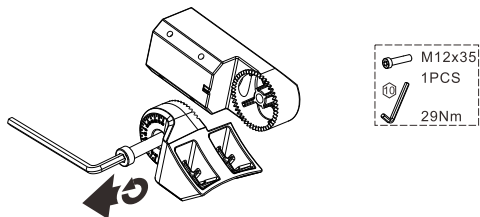


②

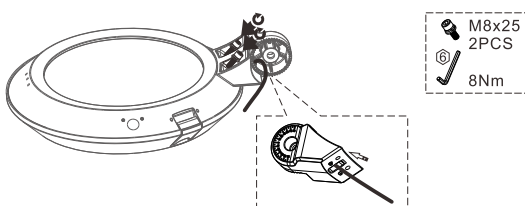


2. ✖

M12x35
1PCS
29Nm

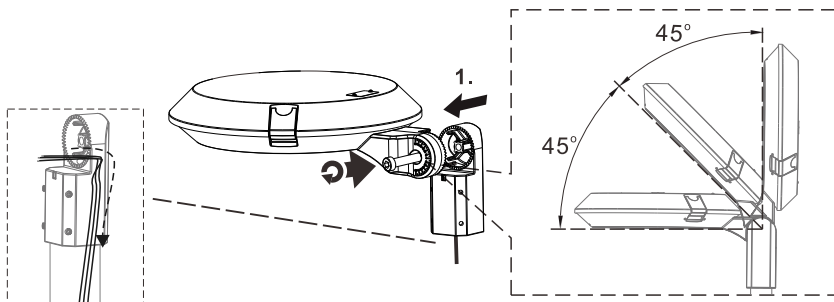


3. ✖




4. ✖

M8x16
4PCS
8Nm

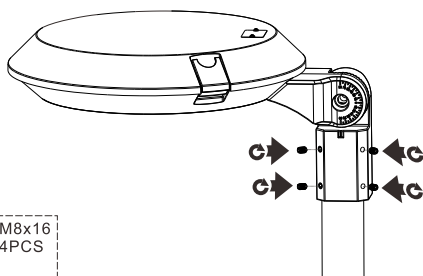


Gooseneck Mounting (Unit: mm/inch)




1. ✖

M8x25
2PCS
8Nm




2. ✖

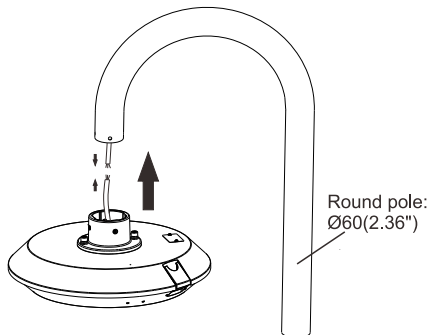


3. ✖

M10x16
4PCS
17Nm

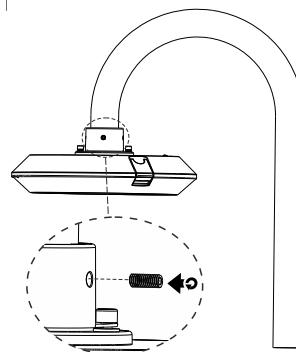


Conduit Mounting (Unit: mm/inch)


1. ✖

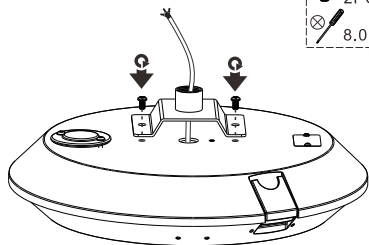

2. ✖

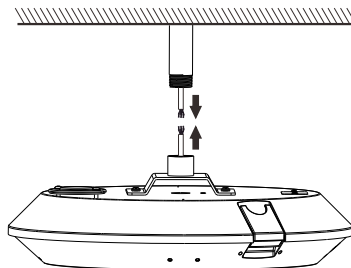


3. ✖

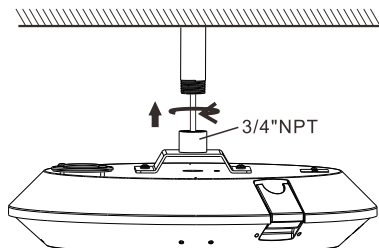


USE PLUMBERS TAPE/PUTTY FOR SECURE SEAL, OTHERWISE LUMINAIRE WILL NOT BE WATERTIGHT!

4. ✖


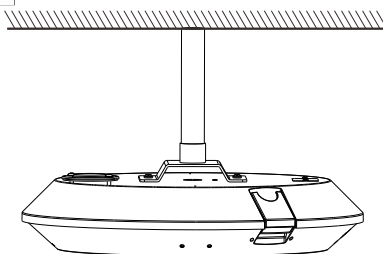


Surface Mounting (Unit: mm/inch)

1. ✖




Drilling distance:




4 PCS
Ø8x40mm

2. ✖

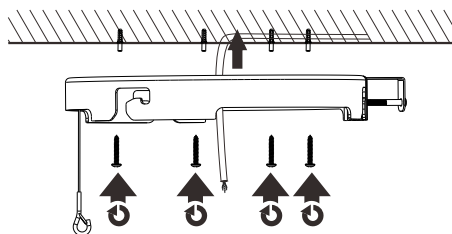


M5x40
4PCS
2.0Nm

3. ✖ 1

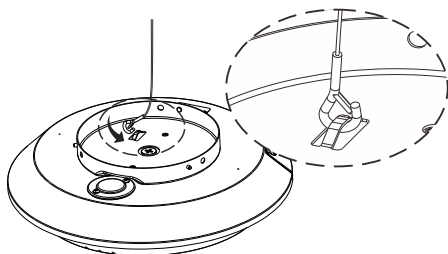


2

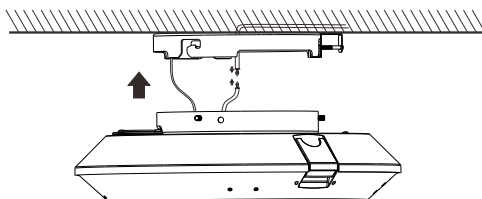


4. ✂

1

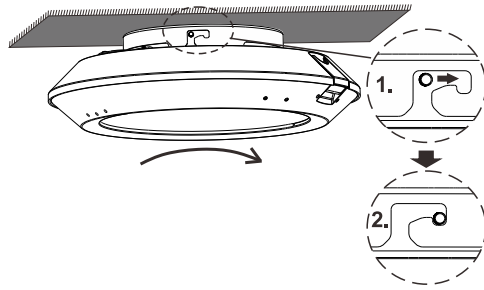

2

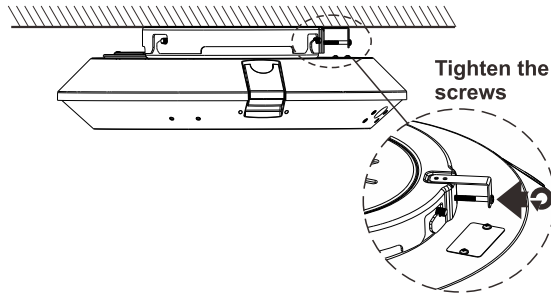

Product Specifications		30W	50W	60W	75W
Input Voltage		120-277VAC			
Power Frequency		50/60Hz			
Outlook Dimensions		Ø400x81mm (Ø15.75"x3.19")			
Net Weight (±0.3kg/±0.66Lbs)	Single Strut Mounting	6.8kg (15.0Lbs)			
	Twin Strut Mounting				
	Straight-Arm Mount				
	Post Top Mounting/ Side Entry Mounting	6.5kg (14.3Lbs)			
	Gooseneck Mounting				
	Conduit Mounting	5.6kg (12.4Lbs)			
	Surface Mounting	6.2kg (13.7Lbs)			
	Wall Mounting	5.8kg (12.8Lbs)			
Projected Area		0.11m ² (1.2ft ²)			
Working Temperature		-30°C to +50°C (-22°F to +122°F)			
Storing Temperature		-40°C to +70°C (-40°F to +158°F)			

L	—	brown	black
N	—	blue	white
⊕ GND	—	yellow/green	green

- Please make sure the luminaire is properly grounded.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.