


**Important: Read all instructions prior to installation.**

### Safety and Notes

1. Product should be installed and serviced in accordance with applicable national, state, and local building and electrical codes.
2. To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures. Avoid looking directly into lamp when illuminated.
3. Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.
4. There are no serviceable parts inside this fixture. Do not attempt to dismantle or service this fixture in any way. If LEDs or protective lens cover are damaged, the fixture must be replaced.
5. Not intended for recess mounting in any type of installation.
6. Use minimum 18 AWG coated wire for supply leads and connect to 120 VAC only.

### Wiring Diagram

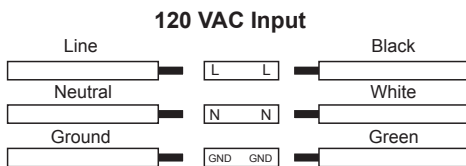

### Specifications

Model	LCFE Series
Operating Temperature	-22°–104° F (-30°–40° C)
Environmental Rating	Suitable for damp locations

Check product label for specific electrical specifications related to installation. Improper installation will void warranty.

### Installation

1. Turn off breaker to remove supply power from circuit.
2. Carefully unpack the fixture, lay out all parts on a clean surface.
3. Loosen the plastic screw to adjust the suspension wire length as needed, then tighten the plastic screw to secure it.
4. Use the slide switch (inside the canopy) to choose a color temperature. The options are 2700K, 3000K, 3500K, 4000K and 5000K.
5. Mount the mounting plate to the outlet box by using two mounting screws.
6. Connect the ground wires (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical box. Attach the black wire from the light fixture to the black wire in the electrical box. Attach the white wire from the light fixture to the white wire in the electrical box.
7. Once the wires are connected, ensure to push back all the wire nuts into the Junction box.
8. Place the fixture over the mounting plate, and secure with two mounting plate screws.
9. Turn on the power.

