

CONNECT WIRES





L	brown		black
N	blue		white
⊕	yellow/green		green

Dimming cords

Note: color for dim cords subject to the cable label on luminaire

LED Sports Light

Installation Instructions

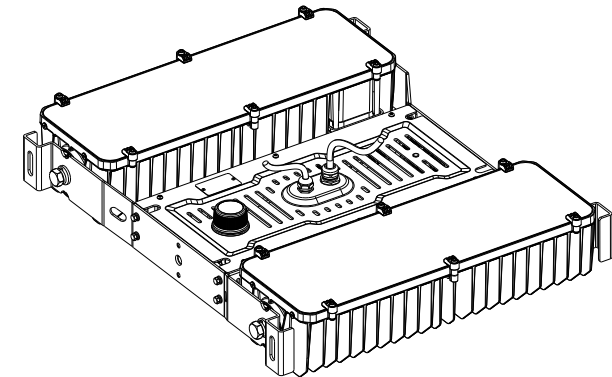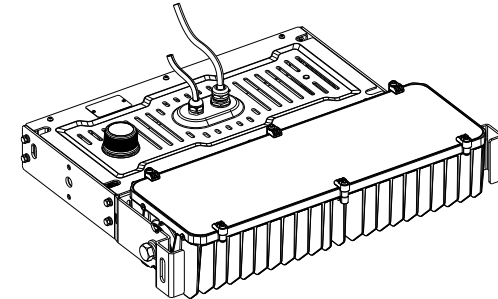

INSTALLATION OR ASSEMBLY INSTRUCTIONS INSTRUCTIONS D'INSTALLATION

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT
BRANCH CIRCUIT CONDUCTOR
CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS
ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT
ADÉQUATS

(toolkit not provided)




IP65

IK08



CLASS I



**READ AND FOLLOW ALL SAFETY INSTRUCTIONS.
SAVE THE MANUAL FOR FUTURE REFERENCE!**

▲ WARNING

To avoid electric shock:

Installation and wiring of luminaire must be in accordance with all applicable local codes.

Installation, inspection, and maintenance of luminaires should be performed by a qualified electrician.

DO NOT make or alter any open holes in the luminaire.

DO NOT modify the luminaire.

DO NOT install damaged product.

Make sure electrical power is OFF before and during installation and maintenance.

Make sure the equipment is properly grounded.

Make sure the supply voltage is same as the rated fixture voltage.

To perform maintenance:

Only use luminaire in its intended location.


Make sure the luminaire is not covered with material that will prevent convection or conduction cooling.

It's suggested to perform visual, electrical, and mechanical inspections on a regular basis and cleaned with a non-aggressive product.


Any deterioration in the cables should be noted and reported to a suitably qualified electrician who will advise an appropriate course of action.

The Surge Protective Device (SPD) will need replacing when it comes to the end of its useful life. This should be checked for operation during the annual maintenance.

POSITIONS ALLOWED


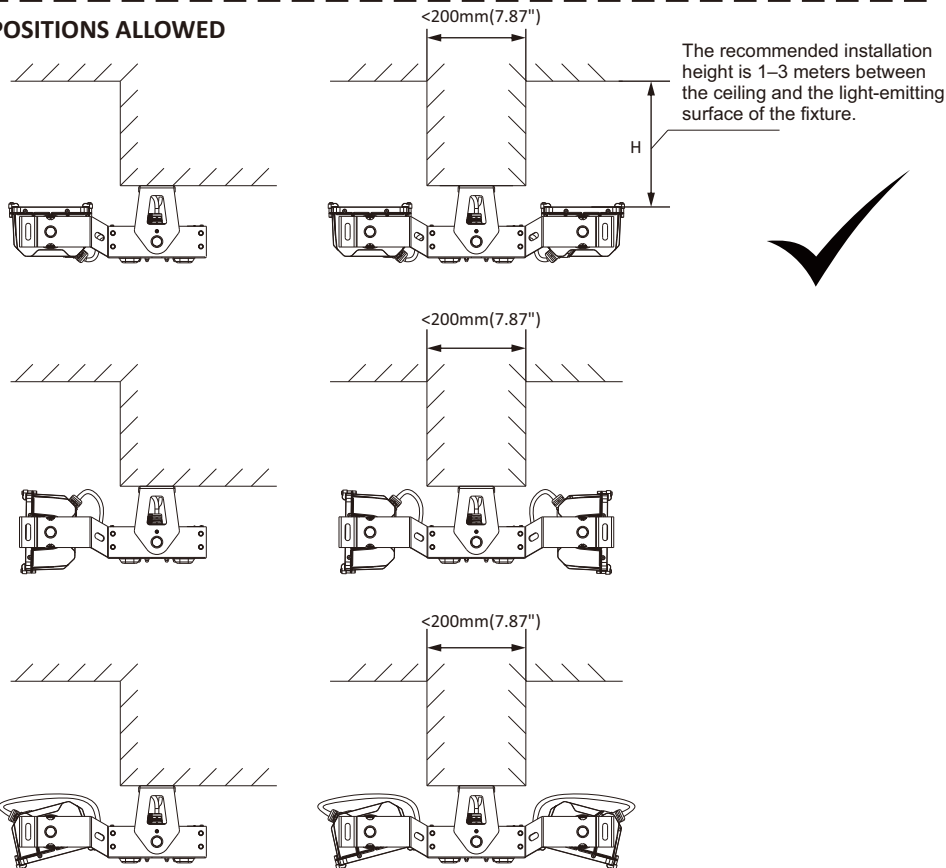


SAFETY ROPE INSTALLATION

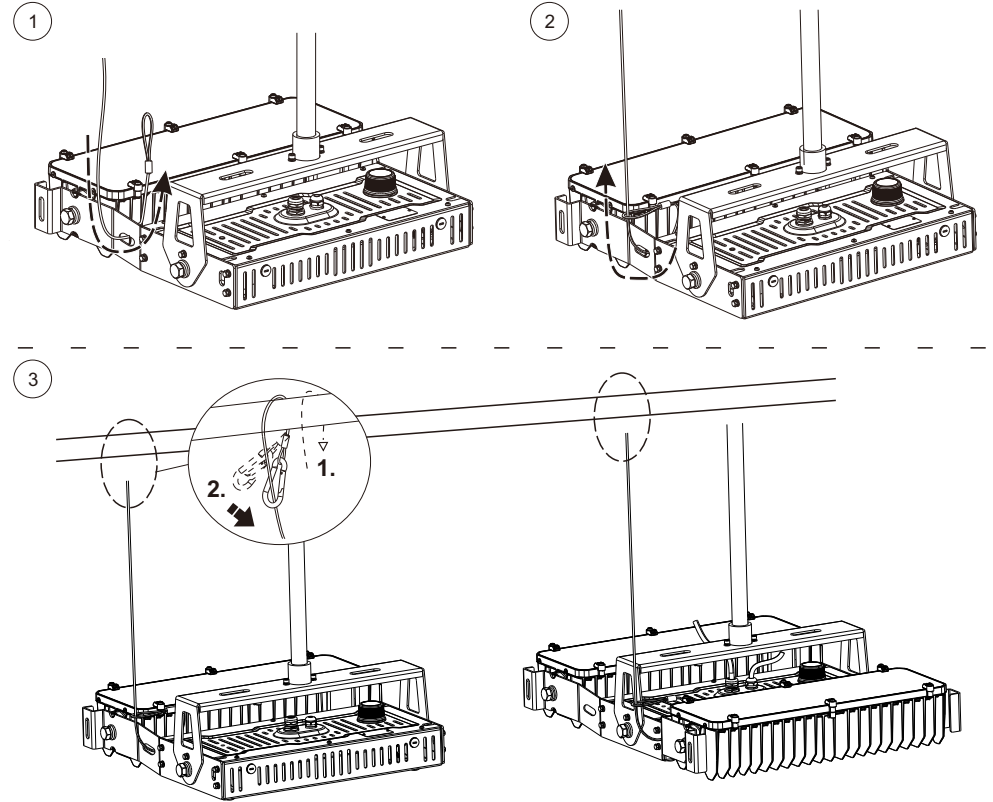


POWER SELECTABLE





Power select and 0-10V dim function optional.
Default setting: Power select function with 100% brightness.

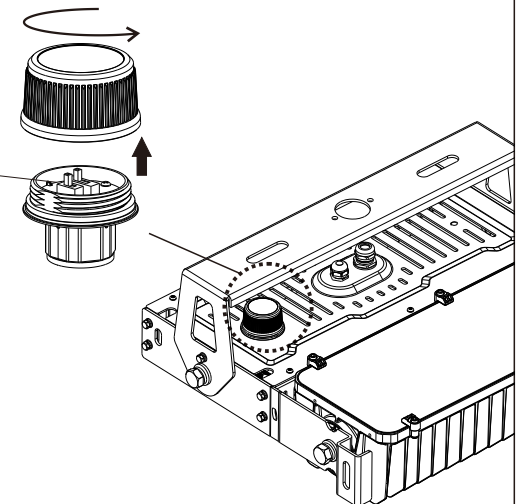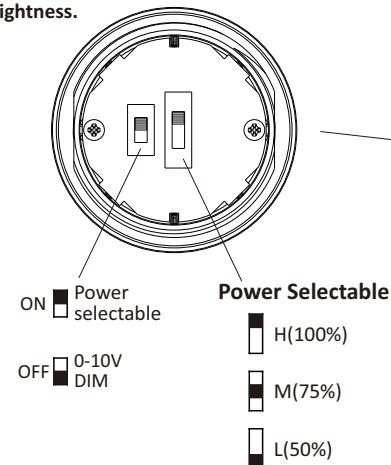


ROTATABLE ANGLE

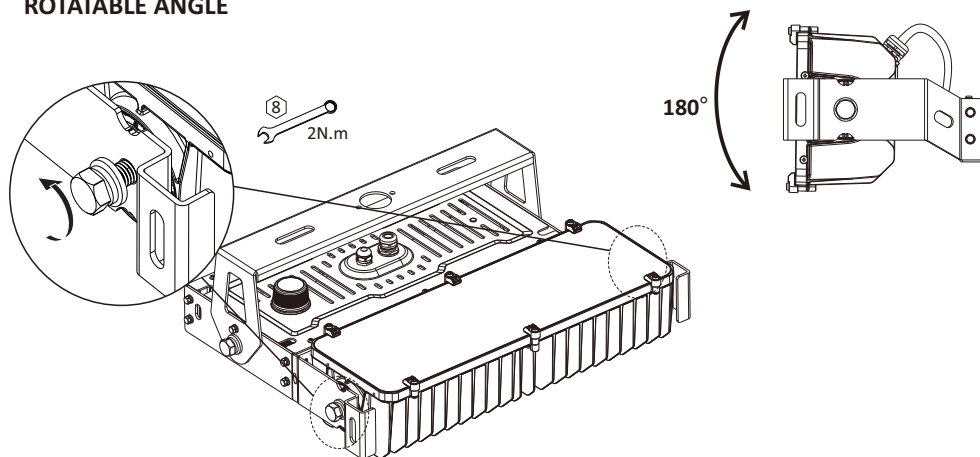

VISOR MOUNT

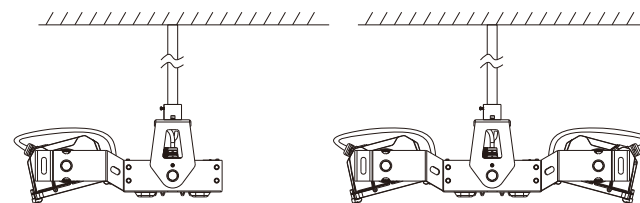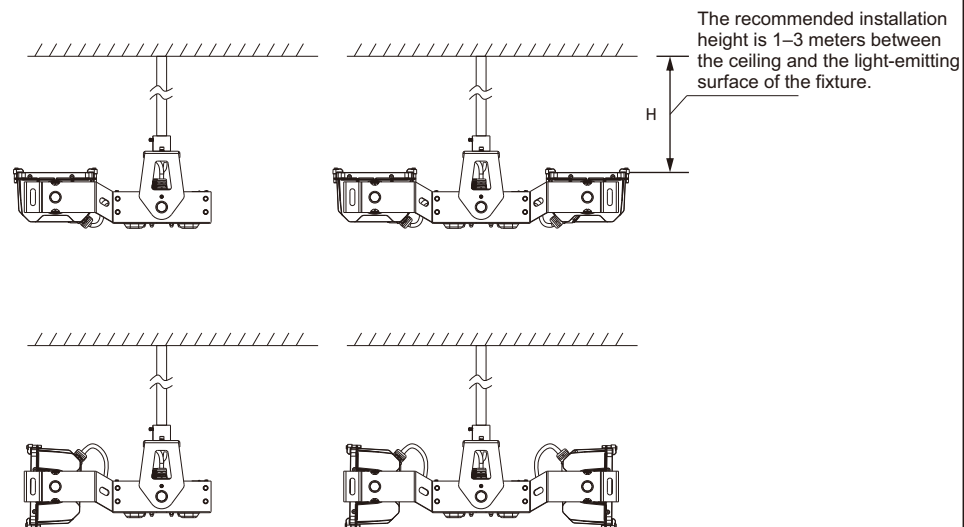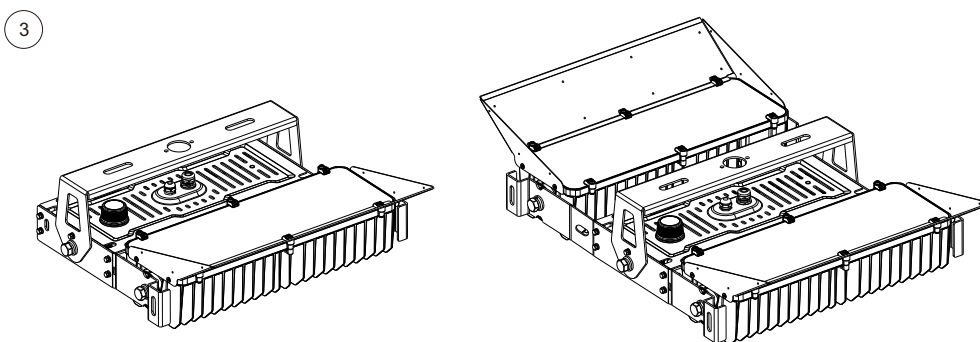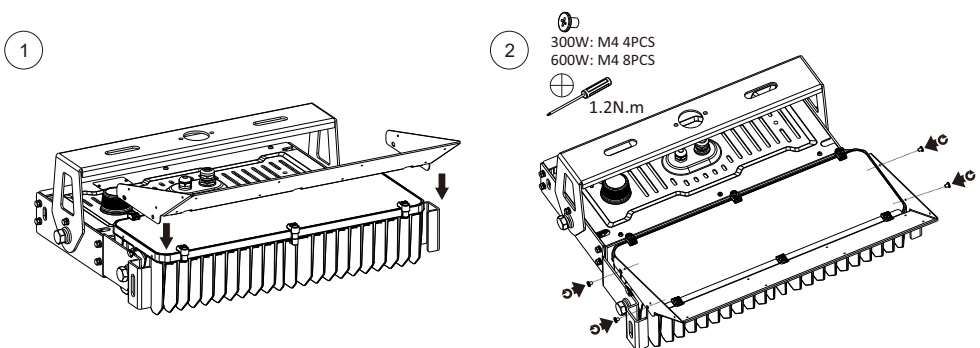



POSITIONS NOT ALLOWED

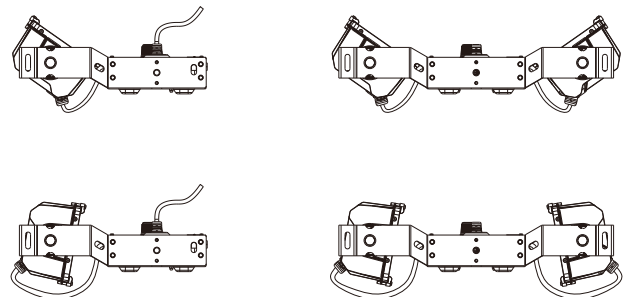

LUMINAIRE (Unit: mm/inch)



Suspension Mount

300W

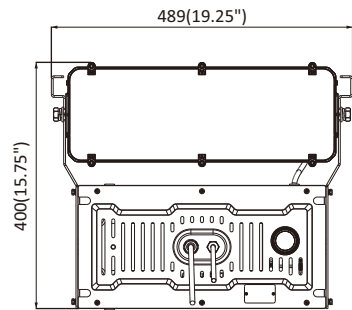

kg
10.2KG
(22.49LBS)




600W

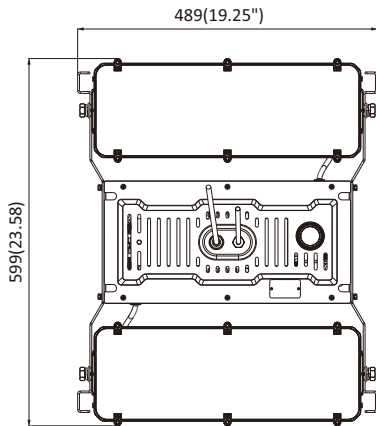

kg
16.1KG
(35.49LBS)


Ceiling Mount

300W




kg
11.5KG
(25.35LBS)


2


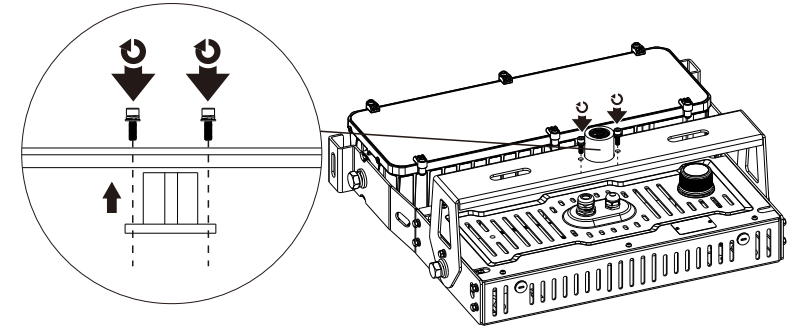


3



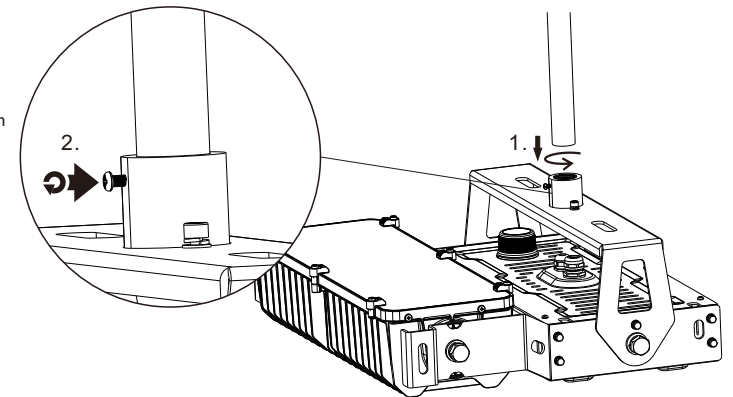


4

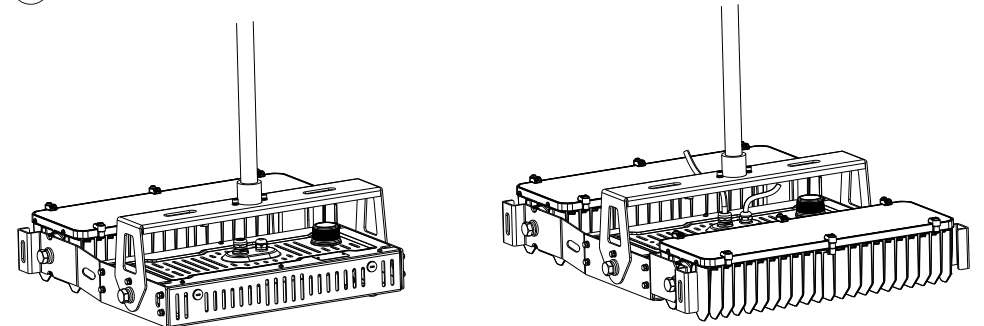


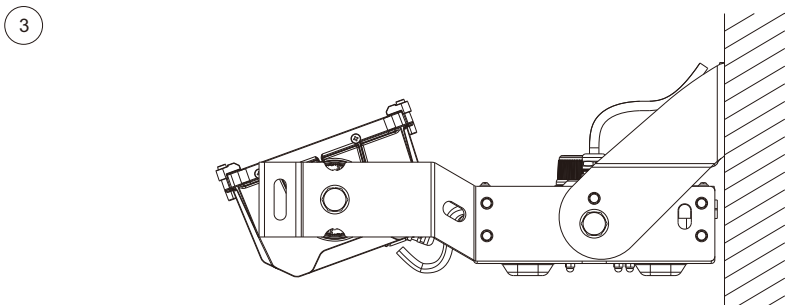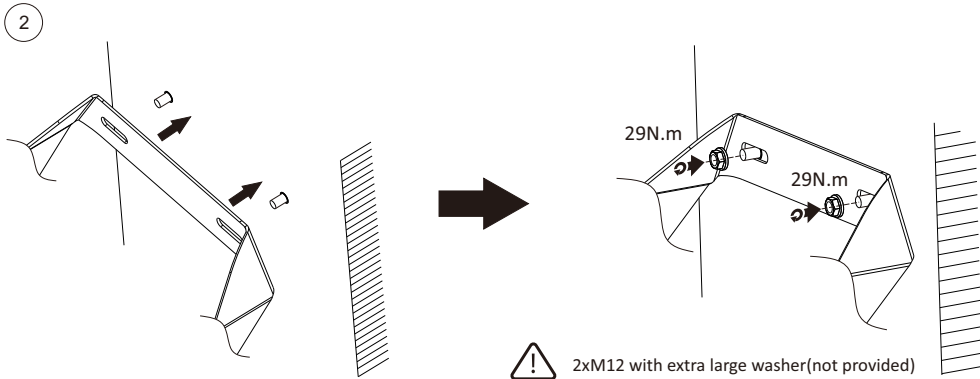


3/4 NPT MOUNT

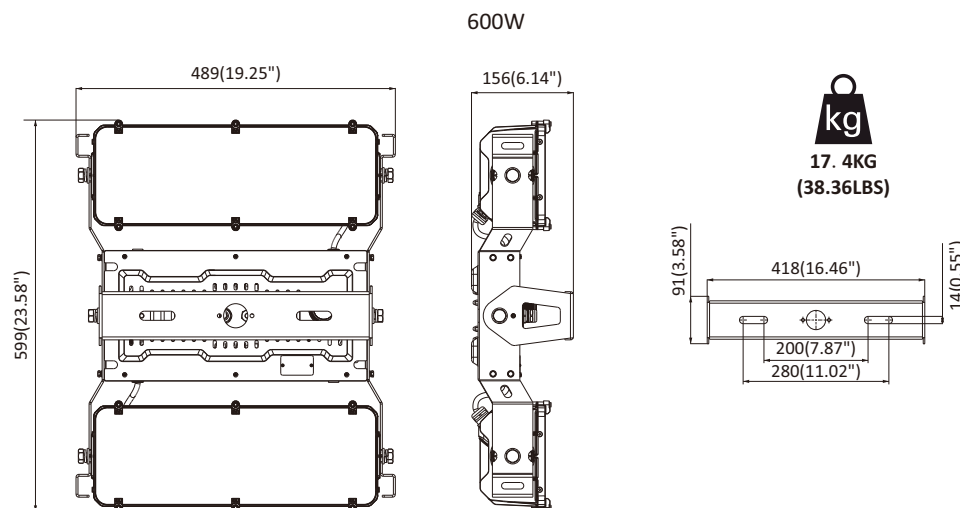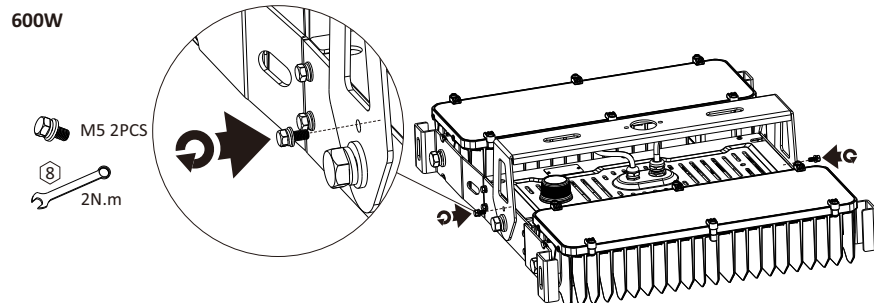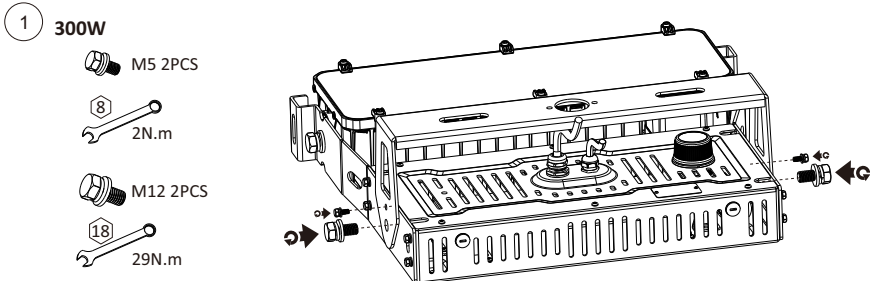


Yoke Mount

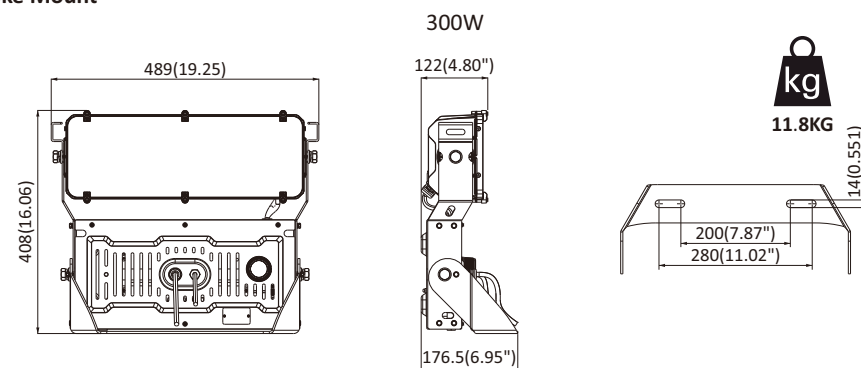


SUSPENSION MOUNT

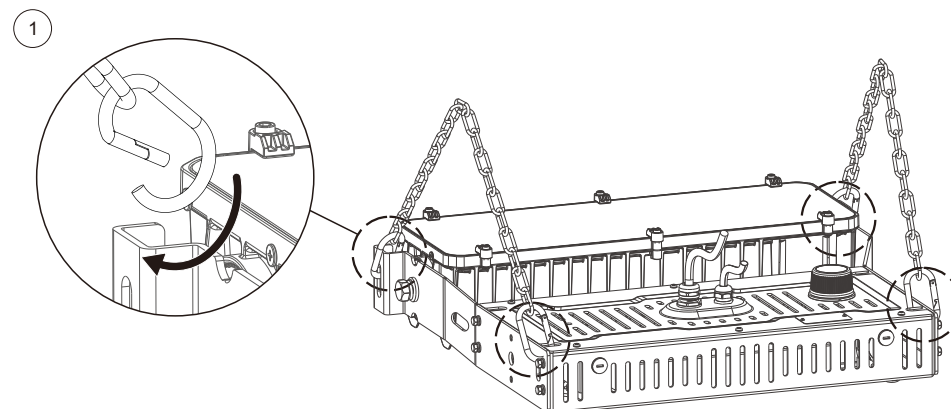

2

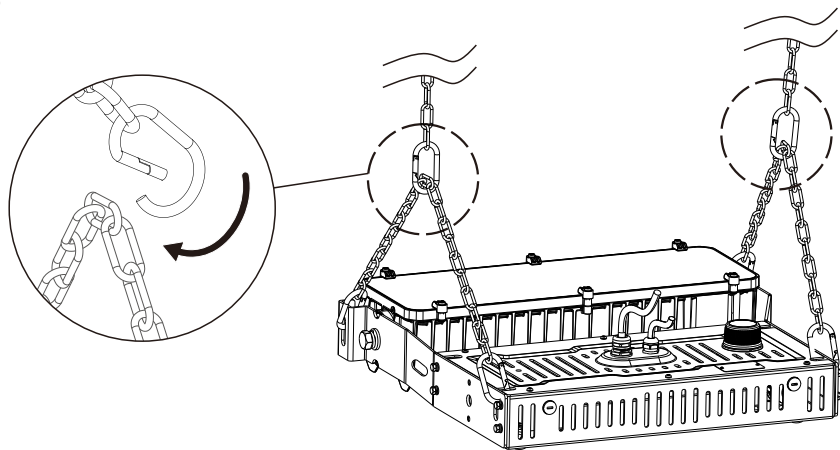

3

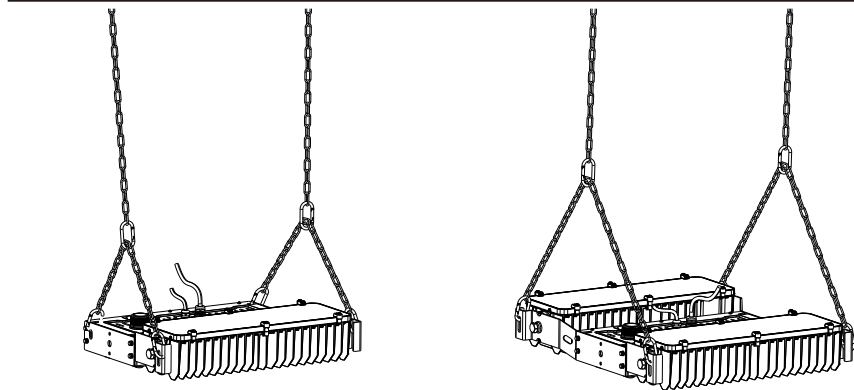

CEILING MOUNT

1


300W

M5 2PCS

2N.m

M12 2PCS


29N.m

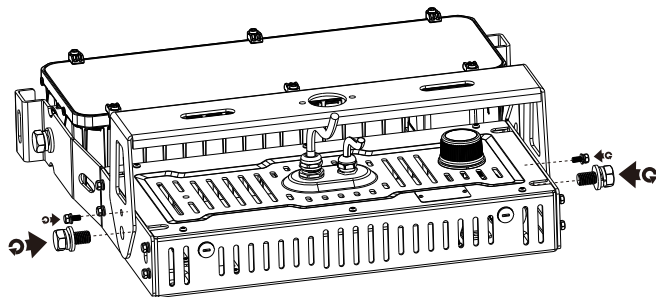


600W

M5 2PCS

2N.m

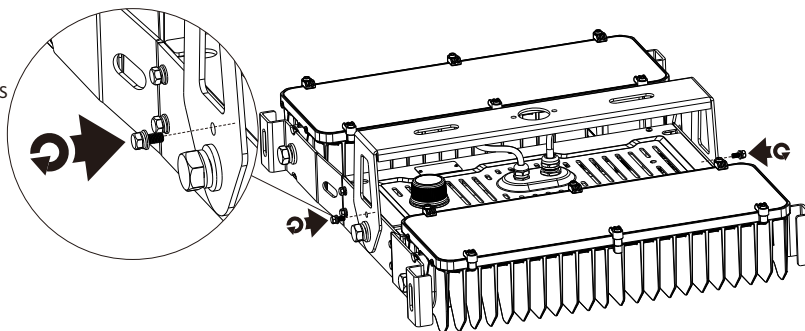



2

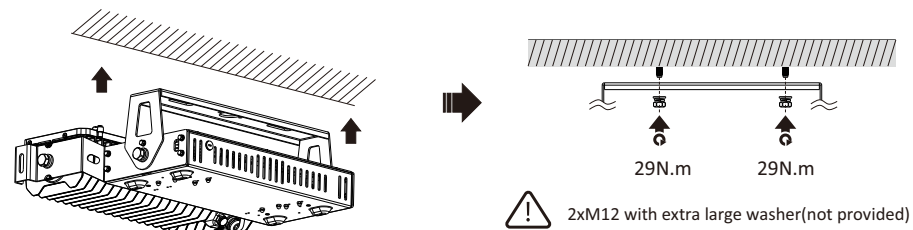

3

300W

600W

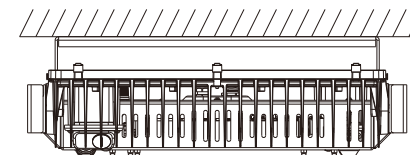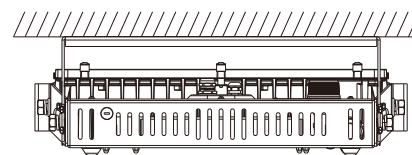

YOKE MOUNT FOR 300W

1

M5 2PCS

2N.m

M12 2PCS

29N.m

