

INSTALLATION INSTRUCTIONS

120V 60Hz

SAFETY PRECAUTIONS:

Read all safety precautions and installation instructions carefully before installing or servicing this fixture. Failure to comply with these instructions could result in potentially fatal electric shock and/or property damage.

It is recommended that all wiring be performed by a qualified electrician. This fixture must be wired in accordance with all national and local electrical codes.


Do not handle any energized fixture or attempt to energize any fixture with wet hands or while standing on a wet or damp surface or in water.

Make sure that the power source conforms to the requirements of the fixture (see labels on fixture housing).

To reduce the risk of electrical shock, and to assure proper operation, this fixture must be adequately grounded. To accomplish proper grounding, there must be a separate ground wire (green) or bare metal contact (metal conduit) between this fixture and the ground connection of your main power supply panel.

INSTALLATION INSTRUCTIONS

1. Turn off power at the circuit breaker and the light switch. Ensure the power is off before continuing.
2. Loosen the fixture screw (4) on the fixture body (3) and remove the mounting bracket (1).
3. Drill pilot holes in the wall with a ¼ in. (6.5 mm) drill bit push wall anchors (6) into the holes.
3. Fix the mounting bracket (1) to the wall anchor (6) by using the wall anchor screw (5). Use mounting screws (2) to lock the mounting bracket (1) to the junction box. Keep the mounting bracket (1) flat against the wall.
4. Wire connection: Connect white(neutral) supply wire to white to white fixture wire (9); connect black(hot) supply wire to black fixture wire (8); connect ground wire to ground fixture wire (7) using wire connector provided. Make sure no bare wires are exposed outside of the wire connector. Put them into the junction box.
5. Lock the fixture body (3) to the mounting bracket (1) using the previously removed fixture screws (4).
6. The 3CCT control switch (12) can be dialed to adjust the appropriate color temperature (2700K/3000K/4000K).
7. Complete the installation and turn on the switch.
8. Night Light Control Switch(10):
Pull and click once, the night light on;
Pull and click once, the night light off.
9. Light Body Control Switch(11):
Pull and click once, the top lamp on;
Pull and click twice, the bottom lamp on;
Pull and click three times, the top and bottom lamp all on;
Pull and click four times, the top and bottom lamp all off.

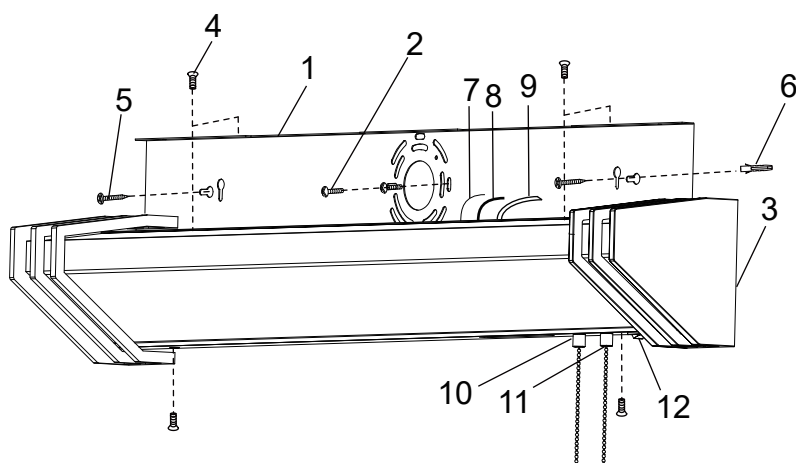

1. Mounting Bracket
2. Mounting Screw
3. Fixture Body
4. Fixture Screw
5. Wall Anchor Screw
6. Wall Anchor
7. Ground Fixture Wire
8. Black Fixture Wire
9. White Fixture Wire
10. Night Light Control Switch
11. Light Body Control Switch
12. 3CCT Control Switch