

INSTALLATION INSTRUCTIONS

WARNING

RISK OF ELECTRIC SHOCK. DISCONNECT MAIN POWER AT FUSE OR CIRCUIT BREAKER BEFORE INSTALLING OR SERVICING THE FIXTURE.



I SAFETY INSTRUCTIONS

1. Read instructions carefully before attempting to install this light.
2. Disconnect power before installing or servicing.
3. This light must be wired in accordance with the local codes and ordinances.
4. Five-year Limited Warranty

II INSTALLATION INSTRUCTIONS

1. Power off all electricity to the luminaire (**Fig.1**).
2. Thread the socket adapter into the socket (**Fig2**).
3. Plug in the two plugs, the one from the socket adapter to the retrofit kit (**Fig.3**).
4. Tuck all the wires carefully into the can and push retrofit kit into can until flush with ceiling (**Fig.4**).
5. Turn power to operate the unit (**Fig.5**).

PARTS AND HOUSING DIMENSIONS

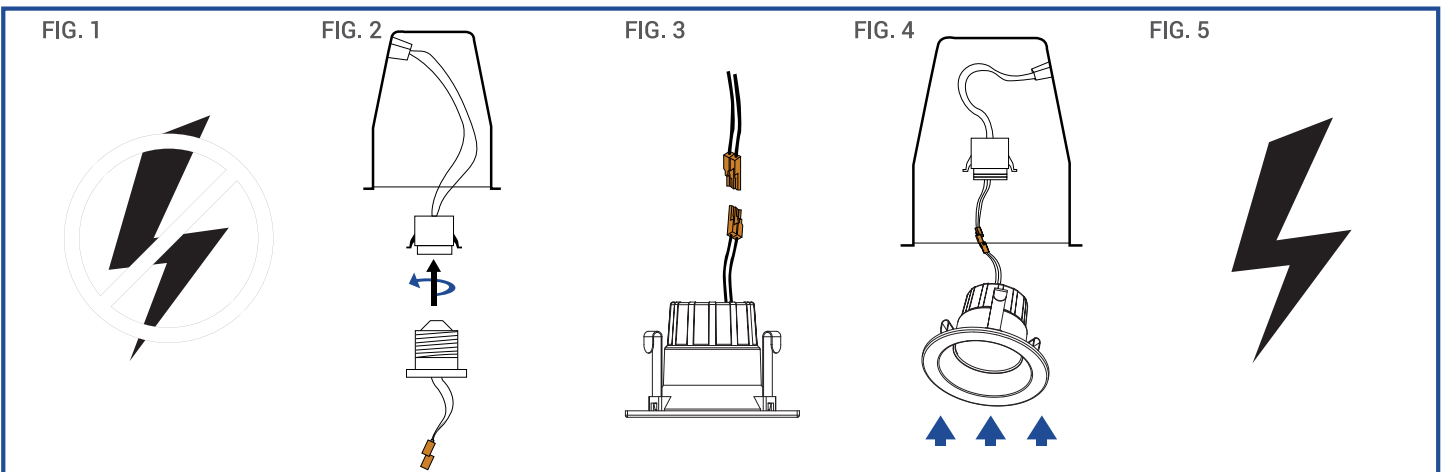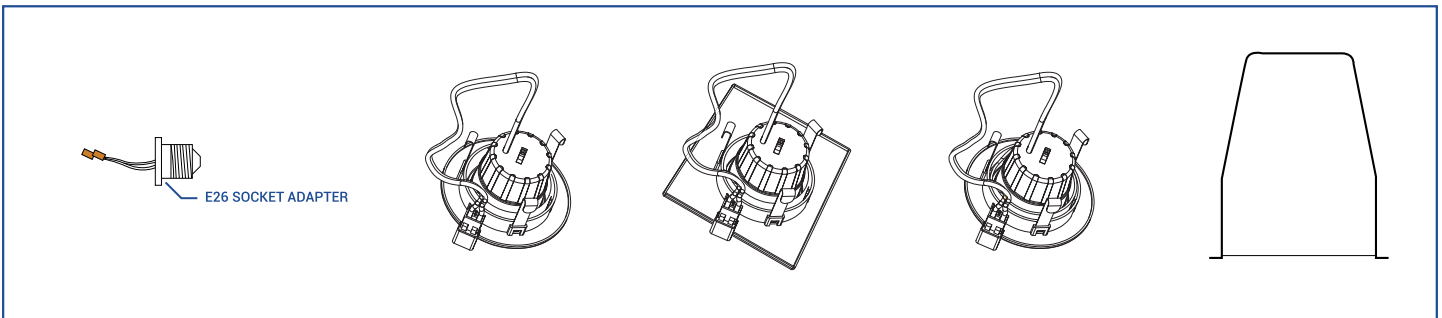

NOTE: Title 24 (California New Construction Application): To comply to Title 24 the unit must be either plugged in with a quick connect (orange female quick connect included). Many newer cans come with orange male quick connect plug (Fig.4). Finally you can cut the E26 socket provided and use wire nuts or pig tale crimps to hardwire the unit (Fig.3)