

LED PENDANT LIGHT, MULTI COL

ITEM: SCRH-UD-18-MCT5-DD, SCRH-UD-24-MCT5-DD,
SCRH-UD-36-MCT5-DD



WESTGATE

www.westgatemfg.com

Please consult a qualified electrician for hanging fixture and wiring.

CAUTION: Before starting the installation, disconnect removing the fuse at the fuse box. Carefully unpack and identify all parts before assembly.

CAUTION: Always disconnect power at the main electrical panel before installation.

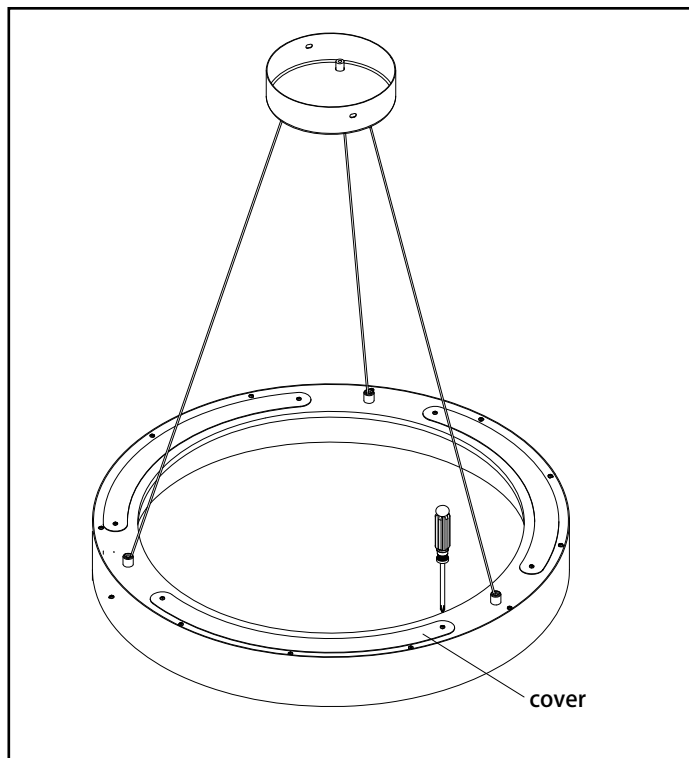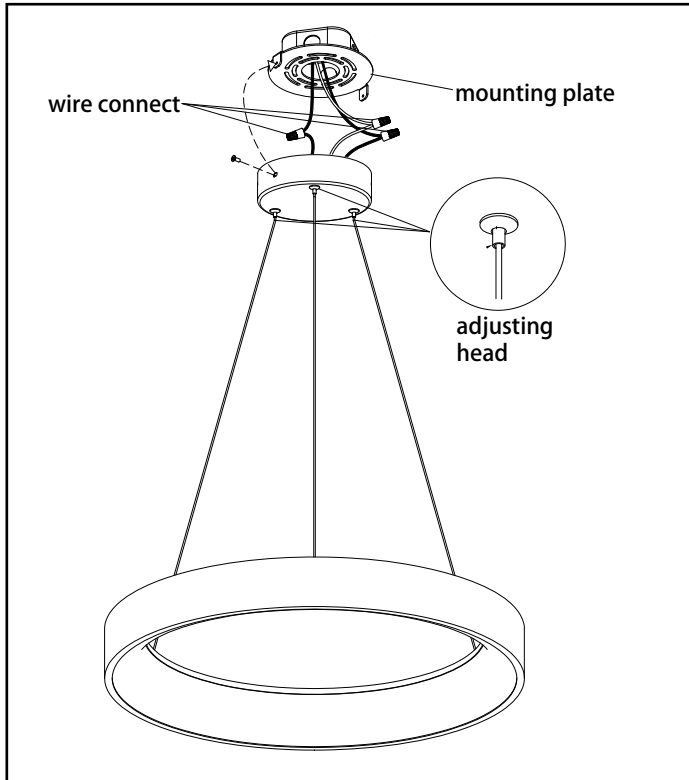

Step 1. Disconnect power at the main electrical panel.

Step 2. Screw the mounting plate to the junction box.

Step 3. Adjust the wire length by the adjusting head.

Step 4. Connect supply wires to fixture wires and insulate with proper size wire nuts.
Connect incoming ground wire (green or bare) to fixture ground wire (green or bare). Connect incoming common (white) wire to fixture white wire. Connect incoming hot (typically black) wire to fixture black wire. Please reference the following wiring guide.

Wiring guide

WHITE (NEUTRAL) SUPPLY WIRE	WHITE FIXTURE WIRE CONNECTOR
BLACK (HOT) SUPPLY WIRE	BLACK FIXTURE WIRE
GREEN/YELLOW GROUND WIRE FROM SUPPLY	GREEN/YELLOW FIXTURE GROUND

Step 5. Use the slide switch to choose a color temperature.
The options are 2700K, 3000K, 3500K, 4000K and 5000K.

Step 6. Screw the canopy to the mounting plate.

Step 7. Uplight option - If uplight needed, unscrew and remove the three covers on the back of the fixture.

Step 8. Installation finished, connect the power and turn on the lights.