



Installation instructions for Sinπ Linear Light pendant 2FT


1. Remove the ceiling box from the packaging box and use a screwdriver to remove the fixing screws.

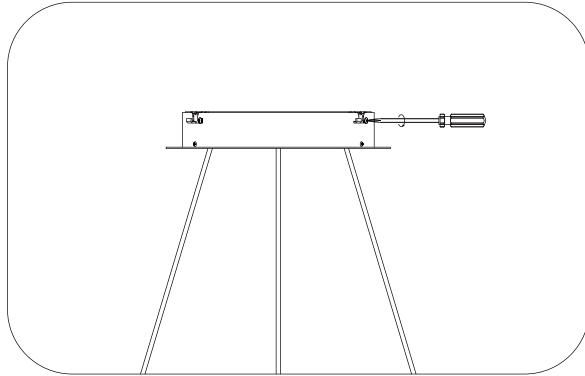


2. Rotate and remove the bottom cover of the ceiling box, disconnect the connecting wires between the upper and bottom covers of the ceiling box (direct/indirect fixture has 2 connecting wires, and direct fixture only has 1 connecting wire).

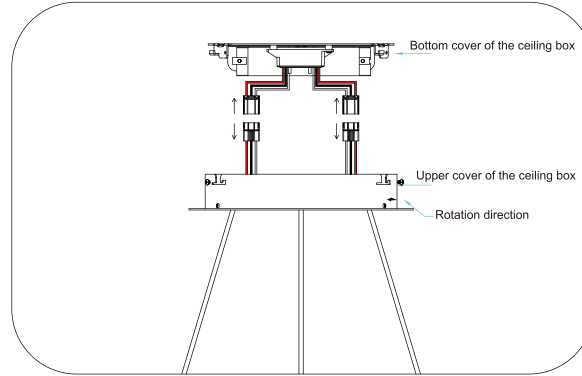


3. Connect the electricity (disconnect the circuit when wiring), and install the bottom cover of the ceiling panel on the canopy (for direct/indirect, both drivers must be connected to electricity). Turn the dial switch to the desired power and color temperature (dimming the direct/indirect separately).

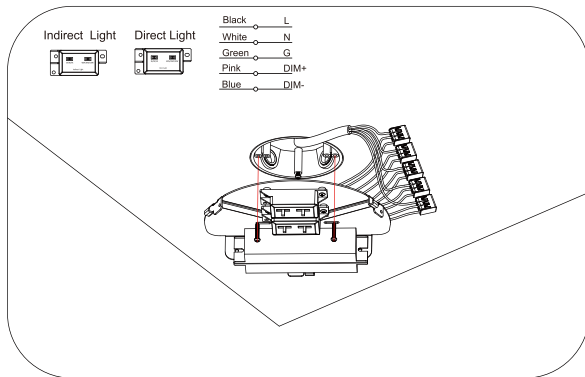


4. Hang this safety rope on the bottom cover of the ceiling plate, connect the input wire, and then align the position to rotate the upper cover of the ceiling plate. Install the upper cover of the ceiling plate on the bottom cover of the ceiling plate (do not install screws temporarily).

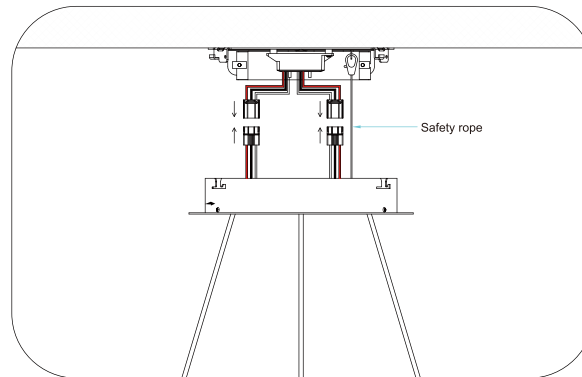

5. By adjusting the length of the suspension wire, adjust the fixture body to the horizontal position (note: 1. After the fixture body is level, the screws that press the wire must be reinstalled tightly. 2. Please adjust the suspension wire of the fixture body).

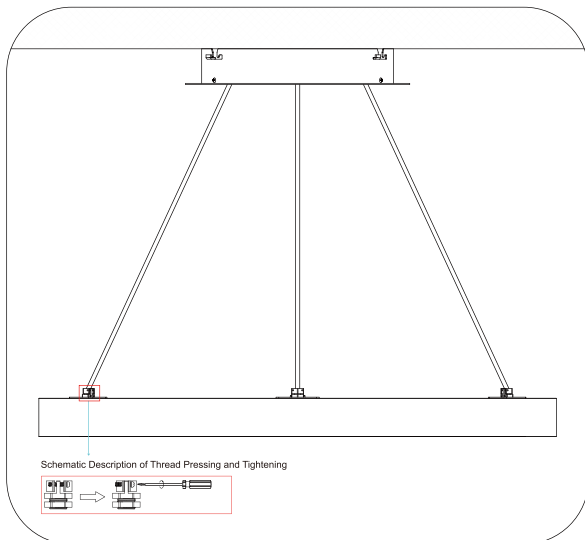


6. Reinstall the screws in Step 1. The whole fixture installation is complete.

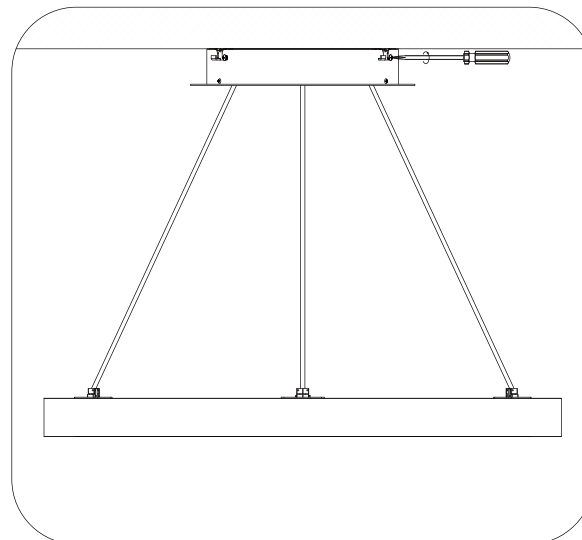


Installation instructions for Sinπ Linear Light pendant- 3FT/4FT

Installation of ceiling plate


1. Remove the ceiling box from the packaging box and use a screwdriver to remove the fixing screws.

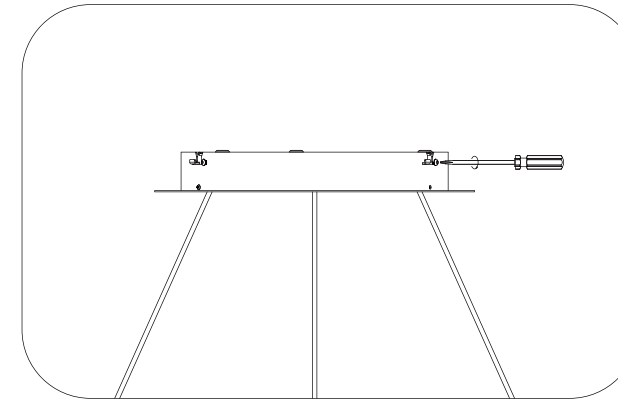


2. Rotate and remove the bottom cover of the ceiling box, disconnect the connecting wire between the upper and bottom covers of the ceiling box (direct/indirect fixture has 2 connecting wires, and direct fixture only has 1 connecting wire).

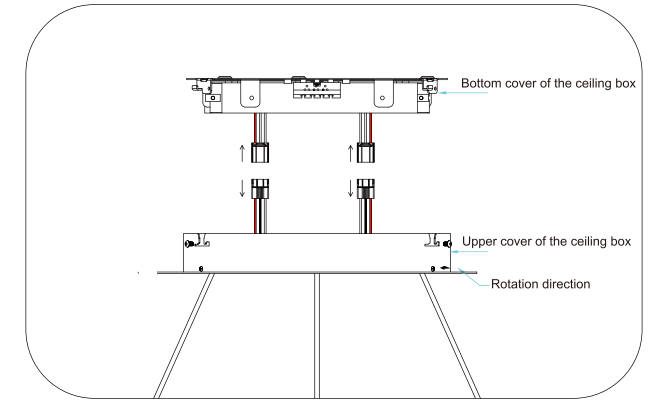


3. Install the bottom cover of the ceiling box on the junction box.

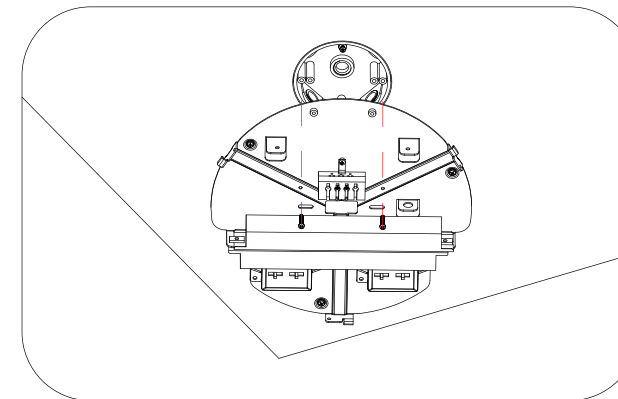


4. Mark the position where the hole needs to be opened.

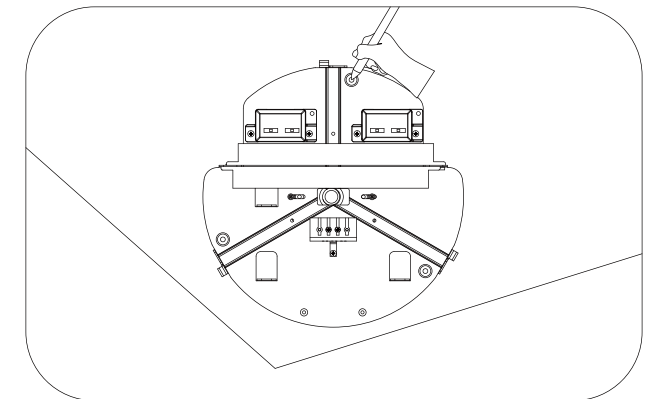


5. Remove the bottom cover of the ceiling box and make holes according to the markings (the size of the holes varies depending on the accessories used).

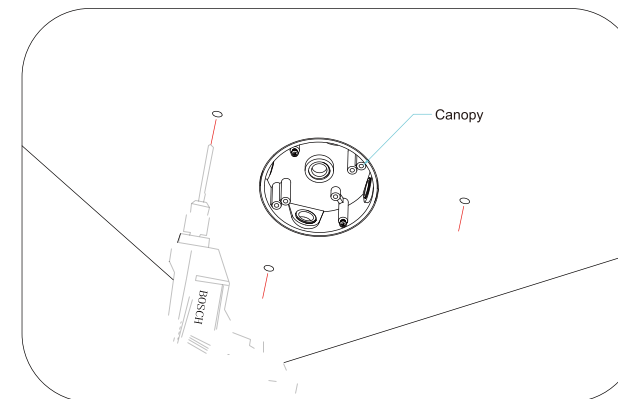


6. 1. Install the explosion screw in the opened hole (when the ceiling is wooden, the opening is 6mm).

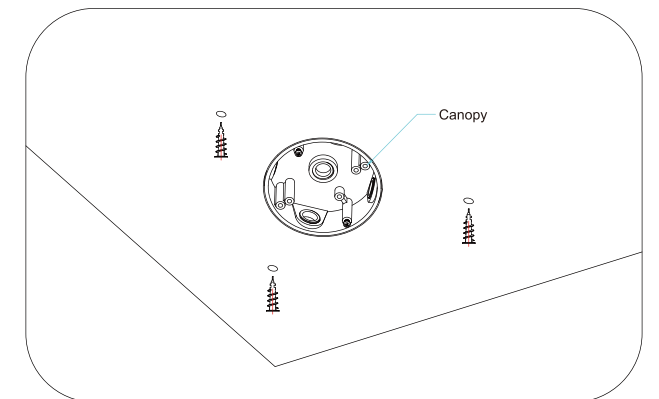


6.2. Install the bottom cover of the ceiling box on the ceiling (when the ceiling is wooden).

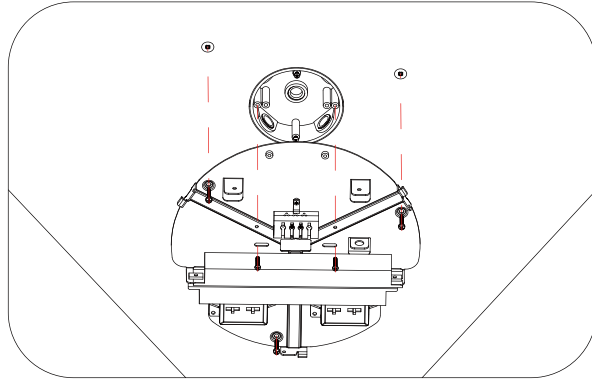


6.3. Install the clip on the ceiling box cover and align it with the hole position (ceiling material: gypsum hole: 11MM).

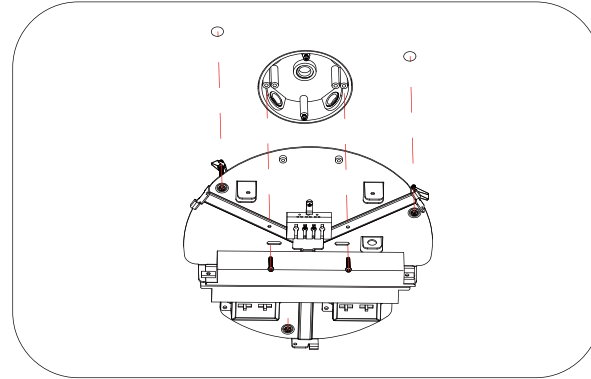

6.4. Install the bottom cover of the ceiling box on the ceiling.

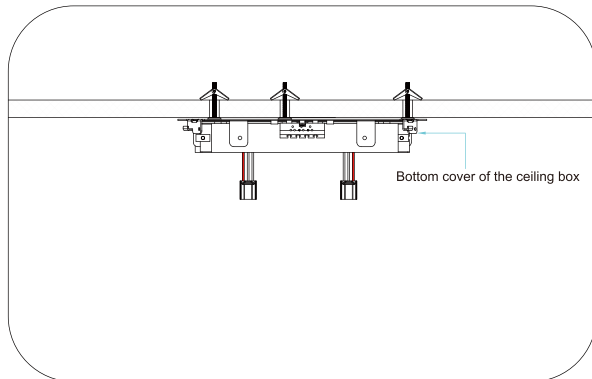


7. After the installation of the bottom cover of the ceiling box is completed, connect to the electricity (disconnect the circuit when wiring).

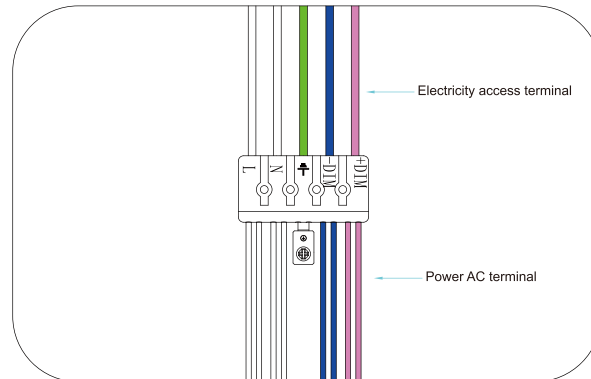


Installation of the entire fixture

1. Hang this safety rope on the bottom cover of the ceiling plate, connect the input wire, and then align the position to rotate the upper cover of the ceiling panel. Install the upper cover of the ceiling plate on the bottom cover of the ceiling plate (do not install screws temporarily).

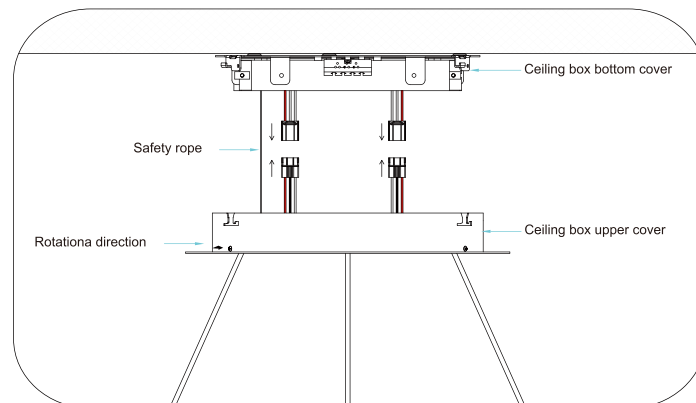

2. By adjusting the length of the suspension wire, adjust the fixture body to the horizontal position (note: 1. After the fixture body is level, the screws that press the wire must be reinstalled tightly. 2. Please adjust the suspension wire of the fixture body).

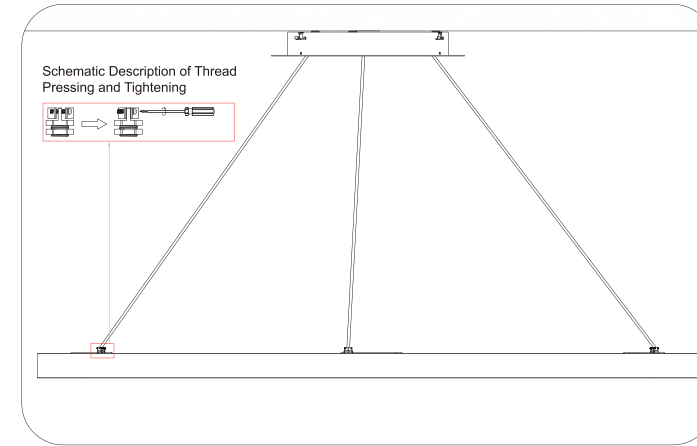

3. Reinstall the screws in Step 1. The whole fixture installation is complete.

