



## LED Wall Pack Installation Instructions

Rev:A0

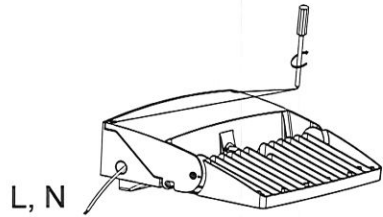

11. Connect the LN and ground wire, assemble the heatsink back to the fixture

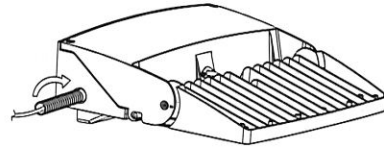


12. Tighten the screws on the heatsink



13. Make sure the installation is complete before turning on the power

Operate as per following instructions if the product is designed with below functions  
**Special functions instruction :**




### Wattage adjustable switch

Turn the wattage adjustable switch to a certain wattage gear, the power of the fixture will change to the corresponding wattage.

Adjustable wattage range 25%-100%.

**Note:** Please turn off the power before adjusting the wattage.




### Wattage adjustable switch

1, The color temperature of the LED fixture turns to 3000K when the switch is set to 3K

2, The color temperature of the LED fixture turns to 4000K when the switch is set to 4K

3, The color temperature of the LED fixture turns to 5000K when the switch is set to 5K

**Note:** Please turn off the power before adjusting the color temperature.

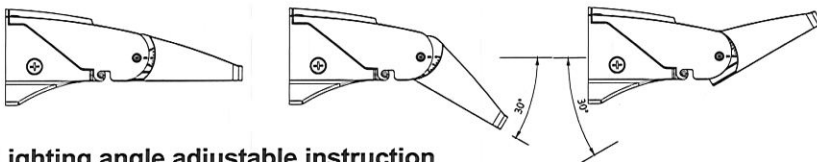

### Lighting angle adjustable instruction

The lighting angle can be adjusted 30° up and down as per demand

**Note:** make sure to tighten the screws to fix the LED fixture after adjustment

### Applications:


Tunnel (except for motor vehicle tunnel), workshop, warehouse, factory, house, building exterior, etc.

### Cautions:

1. Do not use an electric generator to test this LED fixture;
2. Please abide by related country, regional and local law and regulations when installing this fixture;
3. Installation should be done in dry conditions to avoid any electrical shock or damage.

### Notes:


1. To avoid the risk of electrical shock or fire, this fixture should be installed by a certified electrician.
2. Please wear gloves to avoid injury before installation;
3. If at some point during or after installation you should notice smoke or fire coming from the fixture, turn your power off immediately and notify an electrician.
4. This fixture is rated for outdoor use. The recommended minimum distance from fixture to ground is 2 meters.

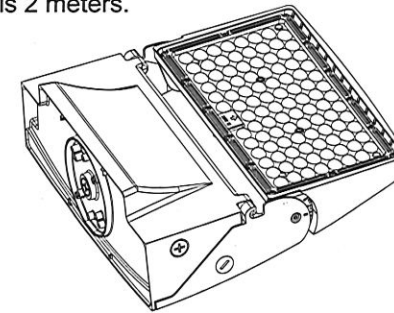

### Installation I:




1. Turn power off




2. Remove the screws of the fixture.




3. Open the driver box.




4. Use a screwdriver to remove the plug.

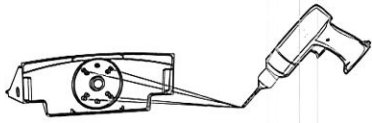


5. Drill through mounting holes.




6. Attach EVA cotton pad.

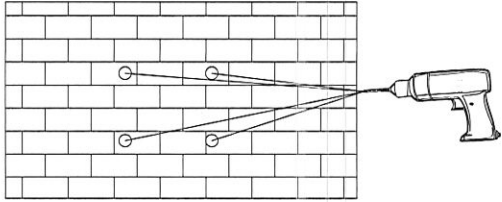


7. Drill corresponding holes into wall.




8. Push the expansion rubber plug into the mounting hole on the wall

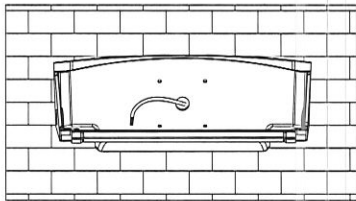


9. Pull out the wires.

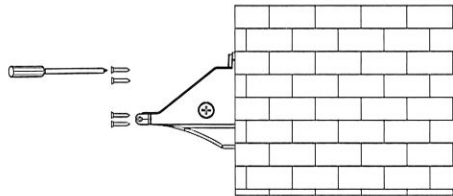

10. Attach bottom shell of fixture to the wall.



11. Connect the corresponding wires.



12. Close the fixture and screw it back together.




13. Make sure the installation is complete before turning power back on.


### Installation II:




1. Turn off the power.




3. Open the driver box




5. Attach EVA cotton pad.




7. Push the expansion rubber plugs into the mounting holes on the wall.




9. Remove the plug on the side of fixture.




2. Remove the screws of the fixture.

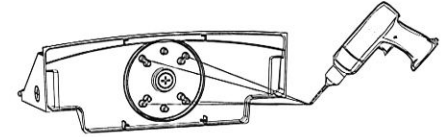


4. Drill through mounting holes.

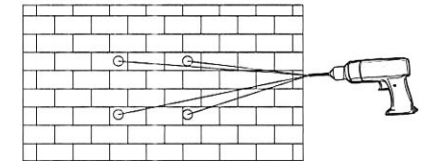

6. Drill corresponding holes into wall.

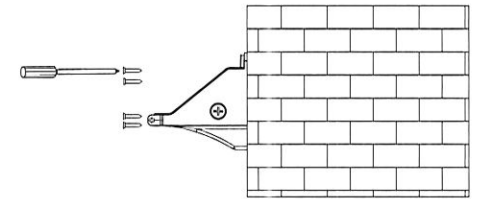

8. Attach bottom shell of fixture to the wall



10. Pass the driver AC wire through the base