



### WARNING

#### PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

- To prevent personal injury or product damage only licensed electricians should install.
- To avoid electric shock or component damage disconnect power before attempting installation or servicing.
- Disconnect product and allow cooling prior to servicing.
- Any alteration or modification of this product is forbidden as it may cause personal injury, death, property damage and/or product malfunction.
- To prevent product malfunction and/or electrical shock this product must be properly grounded.
- This luminaire is designed to operate in ambient temperatures ranging from -40°C to 45°C.
- MIN 75°C SUPPLY CONDUCTORS.
- CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
- Do not switch under load.
- Caulk to mounting surface at all sides.

## INSTALLATION

1. Use the Hex Wrench to loose the 2 Allen Screws. And take apart the mounting bracket from the fixture.(Fig 1)

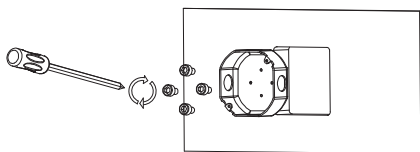


Fig 1

2. Install the mounting bracket to the junction box. (Fig 2)




Fig 2

3. Attach the safety cable to the bracket to hold the fixture onto the wall. (Fig 3)

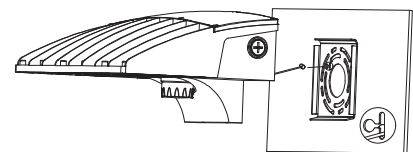


Fig 3

4. Connect wires according to below wire diagram. (Fig 4)

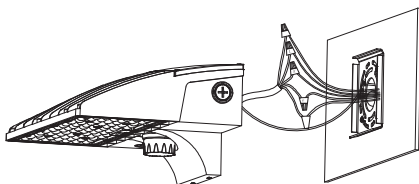
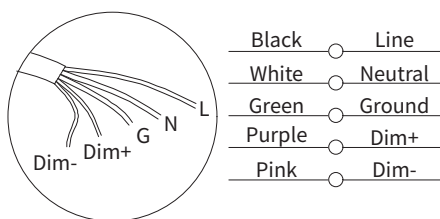


Fig 4

5. Follow the arrow direction to slide the fixture onto the mounting bracket. (Fig 5)




Fig 5

6. Tighten the 2 Allen Screws and installation is completed. (Fig 6)




Fig 6

### WATTAGE & CCT SELECTABLE GUIDANCE

Default Setting:  
Watt: 60W/100W CCT: 5000K Photocell: ON

