

LDSC SERIES Outdoor Lighting

LDSC-24-MCTP-DD-SIL
24" OUTDOOR/INDOOR LED DECORATIVE WALL SCONCE

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)



SELECTION:



Wall sconce fixture updated with the latest in LED technology. It provides accent illumination that visually expands the space and creates a relaxing atmosphere. Ideal for use in hallways, stairways, dining areas, foyers, and meeting rooms for residential and commercial applications. The long LED life, coupled with exceptional color rendering, make this fixture attractive for new or retrofit projects.


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

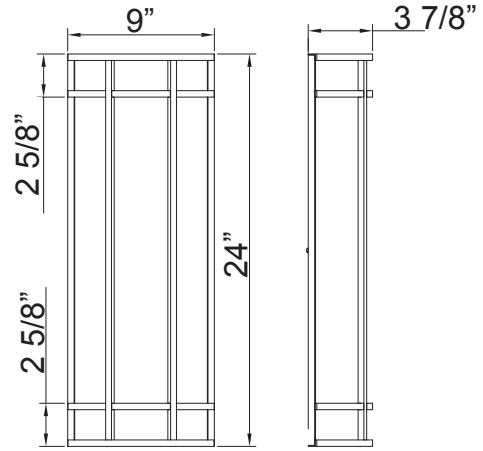

24"(H) x 9"(W) x 3 7/8"(D)

Features

- High-Transmission Frosted Plastic Lens with Excellent Distribution and Uniformity
- Direct replacement for Fluorescent
- Full distribution LED luminaries
- 70,000 Hours Rated Life
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277V
- Wattage: 20W/25W/30W
- Power Factor: >0.9
- Efficacy: 80 LPW

Mechanical:

- Die-Cast Aluminum Housing With Powder Coat Finish
- High-Transmission Frosted Plastic Lens With Excellent Distribution and Uniformity
- Direct Replacement For Fluorescent
- Full Distribution LED luminaries
- IP Rating: IP65
- Operating Temperature: -4°F to 113°F
- Suitable For Wet Locations

Lighting:

- Dimming: (Dual Function) Triac Dimmable at 120V & 0-10V Dimming at 120-277V
- Multi CCT: Selectable CCTs Switch Located On The LED Board
- Total Lumens: 2400LM
- Color Temperature: 3000K/4000K/5000K
- Color Rendering Index: ≥ 80
- Beam Angle: 120°

Applications:

- Motel, Hotels, Hospitals, hallways, stairways, dining areas, foyers, and meeting rooms

Other Models:

- 30W | 2400LM | LDSC-18-MCTP-DD-ORB
- 30W | 2400LM | LDSC-18-MCTP-DD-BK





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-ZB-ZB-2Z

Photometrics: LDSC-24-MCTP-DD-SIL



BUG Rating: B1-U3-G1

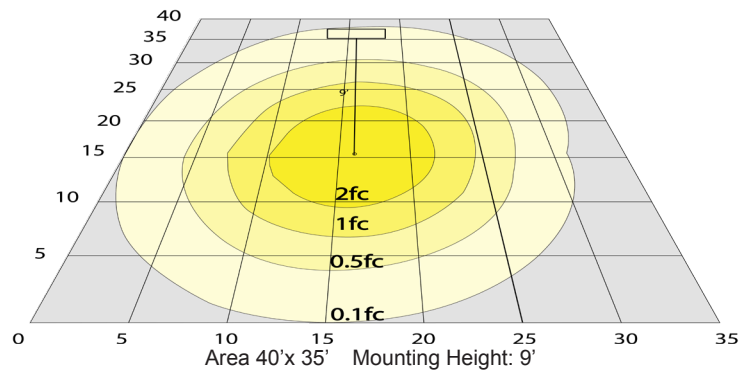

Other Views:



Side View



Front View



Bottom View

Performance Table: LDSC-24-MCTP-DD-SIL

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LDSC-24-MCTP-DD-SIL	20W	120V	1600LM	3000K	B1-U3-G1	80
	25W		2000LM	4000K		
	30W		2400LM	5000K		

Sample Ordering

Model	Size	Color Temp.	Dimming	Housing
LDSC	24	MCTP	DD	SIL

Factory Installed Options:

Blank = No Option

OPT-EM-LDS = EMERGENCY BATTERY BACKUP

OPT-SEN-LDS = PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR

FACTORY INSTALLED OPTIONS:



OPT-EM-LDS



OPT-SEN-LDS

