BKRD SERIES Outdoor Lighting

BKRD-15W-MCTP-BR-P BKRD-15W-MCTP-BK-P

ROUND BULKHEADS, POWER & CCT SELECTABLE, WITH PHOTOCELL



Multi Color Temperature & Multi Power/Wattage (Selectable)







ROUND BULKHEADS are versatile, power and CCT selectable fixtures with a built-in photocell for enhanced energy efficiency and adaptive lighting.









4.5"(H) x 7.68"(W) x 1.67"(D)

Features

- Back plate: Die-cast aluminum
- Multi Color Temperature & Multi Power/Wattage (Selectable)
- Waterproof-Sealed Glass Lens
- 7-Year Warranty

Technical Specifications

Electrical:

Voltage: 120-277V AC 60Hz Wattage: 9W/12W/15W Power Factor: >0.90 Efficacy: 85LM/W

Mechanical:

- Back plate: Die-cast aluminum
- Waterproof-Sealed Glass Lens
- Integrated DC Photocell Under The Lens with ON/ **OFF Switch**
- Non-Cutoff Optics Ideal for Maximum Light Distribution
- Operating Temperature: -4°F to +113°F
- 7-Year Warranty
- IP65, Suitable

Lighting:

- Dimming: 0-10V Dimming
- Multi Color Temperature & Multi Power/Wattage (Selectable)
- LED Type/Brand: 1275LUMILEDS
- Front: Polycarbonate Lens and Housing
- Total Lumens: 850LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 70
- Beam Angle: 100° Rated life: 70,000 Hrs

Applications:

- Entrance lighting, courtyard lighting;
- Industrial lighting, Outdoor landscape lighting;
- Building, The hotel;
- Wall lighting area and so on











Photometrics: BKRD-15W-MCTP-P



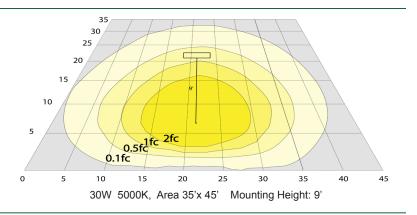

Other Views: BKRD-15W-MCTP-P

Bronze:



Side View



Back View

Black:



Side View



Back View

Performance Table: BKRD-15W-MCTP-P

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
BKRD-15W-MCTP-BR-P BKRD-15W-MCTP-BK-P	9W 12W 15W	120-277V	765LM 1020LM 1275LM	3000K 4000K 5000K	B1-U3-G1	85

Sample Ordering

Model	Watt	Color Temp.	Housing	Sensor
BKRD =	15W	- MCTP -	-	Р
			BR = Bronze	



