BOL SERIES

Outdoor Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

BOL-44-R-C-C-MCTP-BK

44" Round Bollard

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

Customer Name:

Project Name:

Note: | Type:



Avail Finish:



Bollards are designed for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable

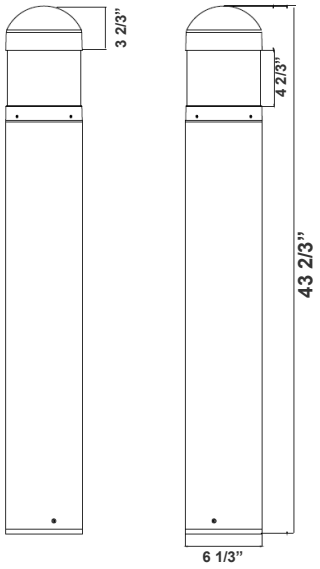

43 2/3"(H) x 6 1/3"(W)

Features

- Corrosion Resistant Aluminum for Exterior
- Samsung 2835 LED Chips
- Wattage & CCT Selectable Switches inside fixture
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277VAC
- Wattage: 12W-16W-22W
- Power Factor: >0.9
- Efficacy: 68 LPW

Lighting:

- Wattage & CCT Selectable Switches inside fixture
- Lumens: 1496LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 70
- Beam Angle : 360°
- Lifespan: 70000 Hours

Mechanical:

- Dome Top with Cone Reflector & Clear Lens
- Corrosion Resistant Aluminum for Exterior
- Mounting Accessories & Anchor Bolts Included (7-1/2" long)
- Operating Temperature: -40°F to 113°F
- 7 Years Warranty
- IP Rating: IP65, Wet Locations

Applications:

- Bollards are designed for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable

Other Models:

- 22W | 1496LM | BOL-44-R-C-C-MCTP-BR

UL LISTED IP65 WET LOCATION

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |

WG-ZY-Z9-2Z

Photometrics: BOL-44-R-C-C-MCTP-BK





BUD Rating: B1-U3-G2

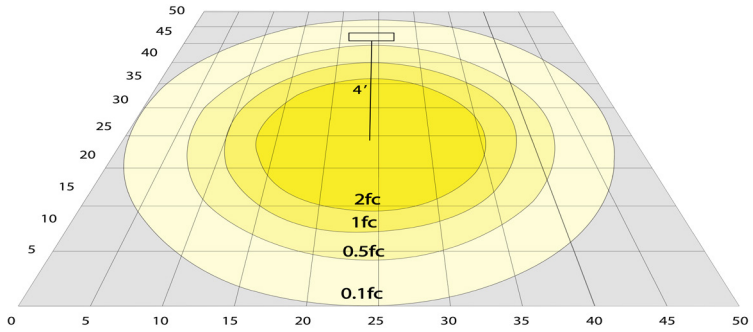

Area 50'x 50' Mounting Height: 4'

Other Views:



Lens View



Bottom View



Mounting accessories Included



3.98" H x 3.44" W x 0.125" D

Performance Table: BOL-44-R-C-C-MCTP-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
BOL-44-R-C-C-MCTP-BK	12W	120~277V	816LM	3000K 4000K 5000K	B1-U3-G2	68
	16W		1088LM			
	22W		1496LM			

Sample Ordering

Model	Height	Top Shape	Reflector	Lens Type	Watt/Color Temp.	Housing
BOL	44	R	C	C	MCTP	BK

Factory-Installed Options:

Blank = No Option For Accessories
OPT-EM-OD1INT=EMERGENCY BACKUP INTERNAL BATTERY, BACK BOX
OPT-BOL-SH1=SHIELD
OPT-PC-B=BUTTON PHOTOCELL
OPT-CRL-95(BK/GR/SR/WH)=PAINT
OPT-SEN-WMC=MICROWAVE BI-LEVEL SENSOR

FACTORY-INSTALLED OPTION:



OPT-EM-OD1INT
INTERNAL BATTERY



OPT-SEN-WMC
MICROWAVE BI-LEVEL SENSOR



OPT-PC-B
FOR 120V-277V PHOTOCELL

COLOR CHART: * Choose from one of our Premium Colors with no set-up fee.

Gloss:


SILVER METALLIC
70 GLOSS
T357-GR105


SILVER METALLIC
30 GLOSS
T353-GR06


DARK RED 90
GLOSS
P009-RD02


INTERNATIONAL
ORANGE 90
GLOSS
T009-OG26


SAFETY ORANGE
90 GLOSS
T009-OG01


YELLOW 90
GLOSS
T009-YL14


YELLOW 90
GLOSS
T009-YL01


TRAFFIC GREEN
70 GLOSS
T007-GN16


GREEN 70 GLOSS
T007-GN13


GREEN 60 GLOSS
C006-GN03


BLUE 90 GLOSS
T009-BL01


DARK BLUE 80
GLOSS
T008-BL20


RAL 8028 TERRA
BROWN 90 GLOSS
C209-BR358

Hammer:

WHITE HAMMER
T013-WH09


BEIGE HAMMER
T013-BG38


GREY HAMMER
C013-GR08


SILVER
HAMMERTONE
T064-GR05


BLACK HAMMER
T013-BK62


RED HAMMER
T013-RD15


GREEN HAMMER
T013-GN220


BLUE HAMMER
T013-BL468


BRONZE HAMMER
T012-BR161

Texture:

WHITE TEXTURE
C031-WH120


FLINT GRAY
TEXTURE
T243-GR522


BLACK TEXTURE
C241-BK109


RED TEXTURE
T241-RD129


BLUE TEXTURE
C241-BL544


OIL RUBBED
BRONZE TEXTURE
T291-BR251

Vein:


BLACK/WHITE
VEIN
T075-WH34


SILVER VEIN
T375-BK26


COPPER VEIN
EXTERIOR
T075-BK211


GOLD VEIN
T375-BK10


COPPER VEIN
T375-BK07