

# BOL SERIES Outdoor Lighting

BOL-44-R-C-F-MCTP-BK

44" Round Bollard

**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)



Avail Finish:




Bollards are designed for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

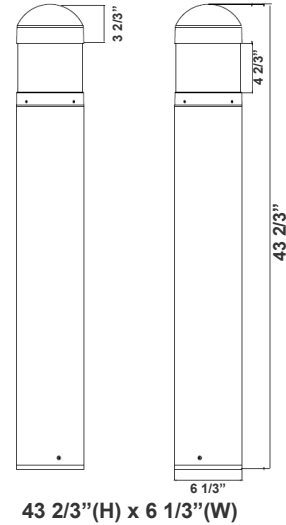

## Features

- Corrosion Resistant Aluminum for Exterior
- Samsung 2835 LED Chips
- Wattage & CCT Selectable Switches inside fixture
- 7-Year Warranty

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC
- Wattage: 12W-16W-22W
- Power Factor: >0.9
- Efficacy: 68 LPW

### Lighting:

- Wattage & CCT Selectable Switches inside fixture
- Lumens: 1496LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 70
- Beam Angle : 360°
- Lifespan: 70000 Hours

### Mechanical:

- Flat Top with Cone Reflector & Frosted Lens
- Corrosion Resistant Aluminum for Exterior
- Mounting Accessories & Anchor Bolts Included (7-1/2" long)
- Operating Temperature: -40°F to 113°F
- 7 Years Warranty
- IP Rating: IP65, Wet Locations

### Applications:


- Bollards are designed for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable

### Other Models:


- 22W | 1496LM | BOL-44-R-C-F-MCTP-BR



## Photometrics: BOL-44-R-C-F-MCTP-BK

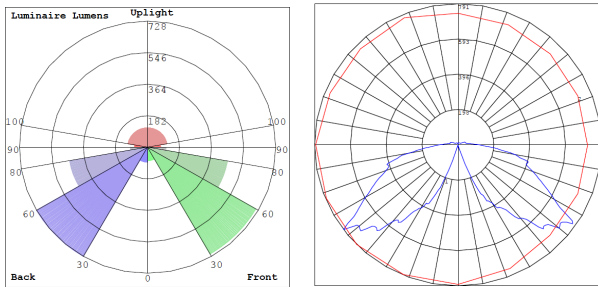

BUD Rating: B1-U3-G2

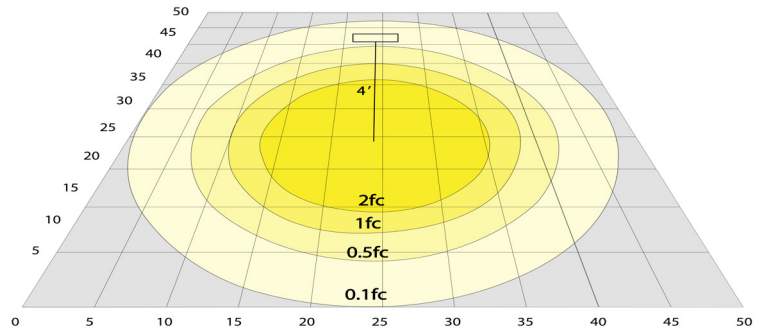

Area 50'x 50' Mounting Height: 4'

## Other Views:




Lens View



Bottom View



Mounting accessories Included

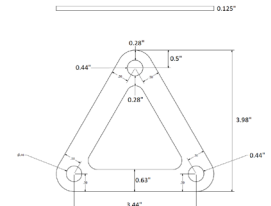

3.98" H x 3.44" W x 0.125" D

## Performance Table: BOL-44-R-C-F-MCTP-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
BOL-44-R-C-F-MCTP-BK	12W	120~277V	816LM	3000K 4000K 5000K	B1-U3-G2	68
	16W		1088LM			
	22W		1496LM			

## Sample Ordering


**Model Height Top Shape Reflector Lens Type Watt/Color Temp. Housing**

BOL - 44 - R - C - F - MCTP - BK

## Factory-Installed Options:

Blank = No Option For Accessories  
 OPT-EM-OD1INT=EMERGENCY BACKUP INTERNAL BATTERY, BACK BOX  
 OPT-BOL-SH1=SHIELD  
 OPT-PC-B=BUTTON PHOTOCELL  
 OPT-CRL-95(BK/GR/SR/WH)=PAINT  
 OPT-SEN-WMC=MICROWAVE BI-LEVEL SENSOR

## FACTORY-INSTALLED OPTION:



OPT-EM-OD1INT  
INTERNAL BATTERY



OPT-SEN-WMC  
MICROWAVE BI-LEVEL SENSOR



OPT-PC-B  
FOR 120V-277V PHOTOCELL




**COLOR CHART:** \* Choose from one of our Premium Colors with no set-up fee.

**Gloss:**



**Hammer:**

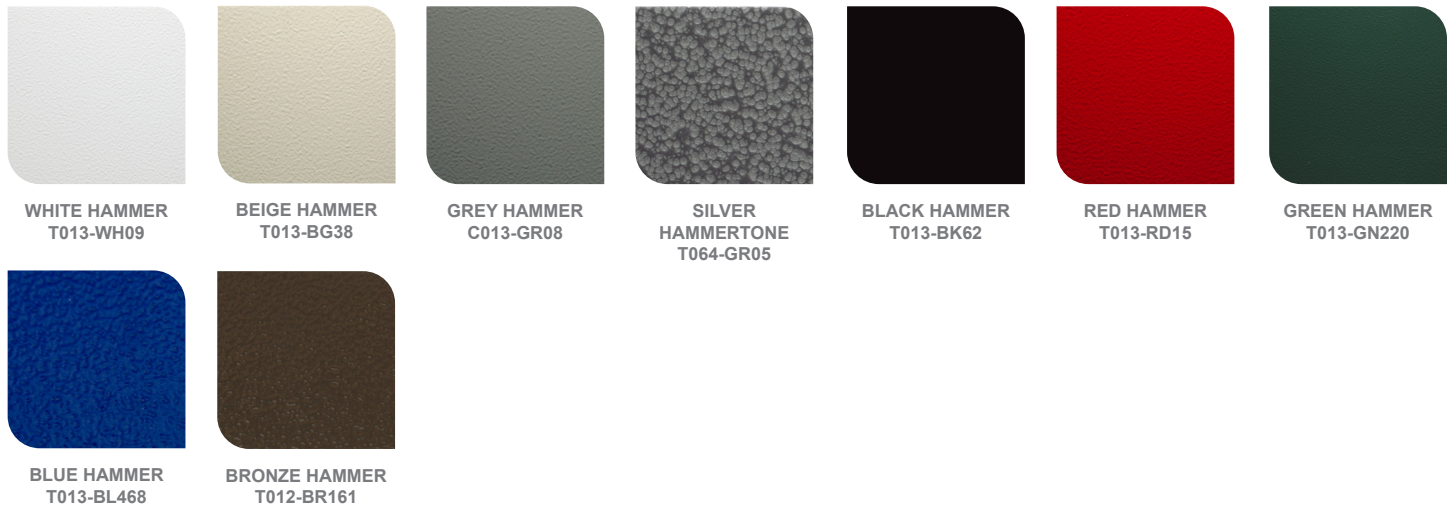

**Texture:**



**Vein:**

