

# BOL SERIES

Outdoor Lighting

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

BOL-44-R-L-C-MCTP-BK

44" Round Bollard



Selection:




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

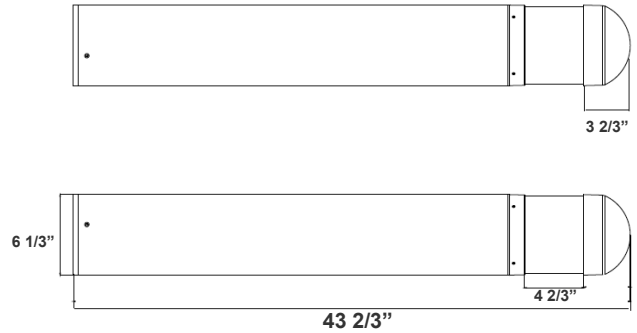

43 2/3"(W) x 6 1/3"(H)

Bollards are designed for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable

## Features

- Corrosion Resistant Aluminum for Exterior
- Samsung 2835 LED Chips
- Wattage & CCT Selectable Switches inside fixture
- 7-Year Warranty

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC
- Wattage: 12W-16W-22W
- Power Factor: >0.9
- Efficacy: 68 LPW

### Mechanical:

- Flat Top with Cone Reflector & Frosted Lens
- Corrosion Resistant Aluminum for Exterior
- Mounting Accessories & Anchor Bolts Included (7-1/2" long)
- Operating Temperature: -40°F to 113°F
- 7 Years Warranty
- IP Rating: IP65, Wet Locations

### Lighting:

- Wattage & CCT Selectable Switches inside fixture
- Lumens: 1540LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 70
- Beam Angle : 360°
- Lifespan: 70000 Hours

### Applications:

- Bollards are designed for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable

### Other Models:

- 22W | 1500LM | BOL-44-R-L-C-MCTP-BR





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com | www.westgatecontrols.co




WG-ZY-29-2Z

## Photometrics: BOL-44-R-L-C-MCTP-BK

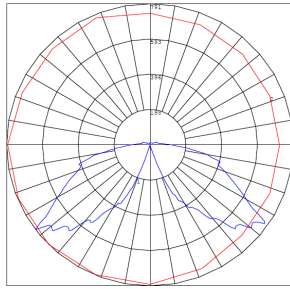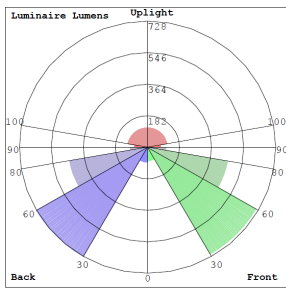

BUD Rating: B1-U3-G2

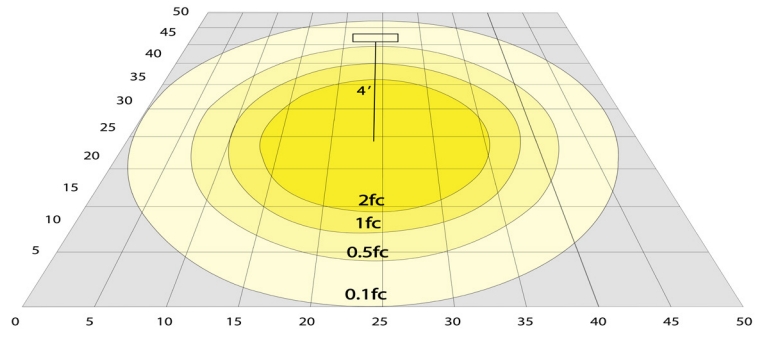


## Other Views:




Lens View



Bottom View



Mounting accessories  
Included

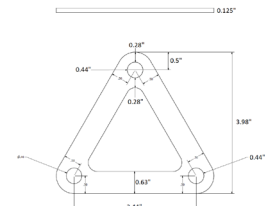

Mounting Template  
3.98" H x 3.44" W x 0.125" D

## Performance Table: BOL-44-R-L-C-MCTP-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
BOL-44-R-L-C-MCTP-BK	12W	120~277V	1560LM	3000K 4000K 5000K	B1-U3-G2	130
			1680LM			
			1620LM			
	16W		2080LM			
			2240LM			
			2160LM			
			2860LM			
	22W		3020LM			
			2970LM			

## Sample Ordering

Model Height Top Shape Reflector Lens Type Watt/Color Temp. Housing

BOL - 44 - R - L - C - MCTP - BK

## Example:

1. BOL-44-R-L-C-MCTP-BK

(FOR BOL 22W MCTP FIXTURE 120-277V)

