

CDL2 SERIES

OUTDOOR LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

CDL2-25CW
CDL2-25NW
CDL2-25WW




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

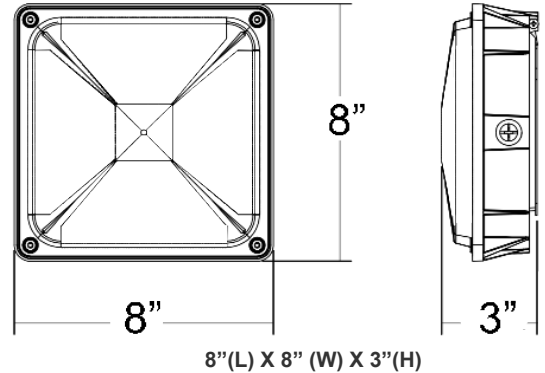

Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting.

Features

- Housing: Die-cast aluminum with prismatic polycarbonate lens redesigned for LED
- Designed for 9 to 16 foot mounting heights
- Factory-Installed Options: Battery Backup, Motion Sensor
- 7-year warranty

Technical Specifications

Electrical:

- Input Wattage: 25W
- Input Current: 0.6A MAX
- Input Voltage: 120-277VAC 50/60Hz
- Power factor: >0.90
- Other wattages: 45W/ 60W/ 80W

Mechanical:

- Die-cast aluminum with bronze
- Four 1/2" threaded hubs located on four sides of the housing
- Prismatic polycarbonate lens
- Lifespan: 70000 Hrs
- Operating temperature: -4°F ~ 104°F
- IP rating: IP65, Wet Locations

Lighting:

- Dimming: 0~10V dimmable
- LED type/ Brand: SMD 3030/ Lumileds LEDs
- Total lumens: 2780LM/ 2800LM/ 2880LM
- Color temperature: 3000K/ 4000K/ 5000K
- Color rendering index: >80
- Beam angle: 150°

Applications:

- Indoor Parking
- Commercial Buildings
- School
- Warehouses
- Complexes
- Apartment
- Garage

Other Models:



- | | | |
|----------------------------|----------------------------|----------------------------|
| • 45W 4400LM CDL2-45CW | • 60W 7400LM CDL2-60CW | • 80W 9500LM CDL2-80CW |
| • 45W 4300LM CDL2-45NW | • 60W 7100LM CDL2-60NW | • 80W 9400LM CDL2-80NW |
| • 45W 4200LM CDL2-45WW | • 60W 7100LM CDL2-60WW | • 80W 9400LM CDL2-80WW |




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co



Photometrics: CDL2-25W



BUD Rating: B1-U2-G1

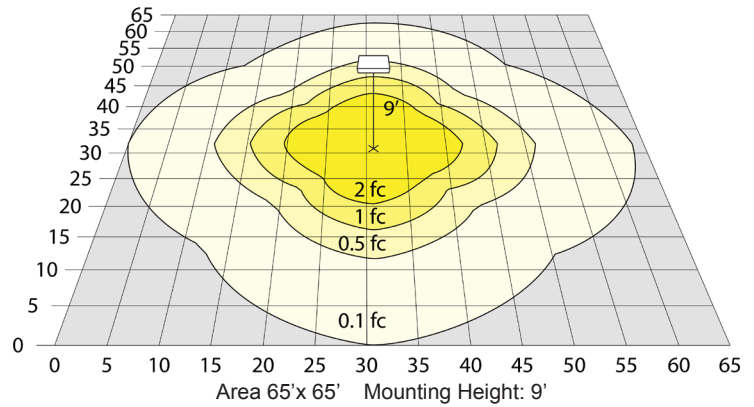


Other Views:



Side View



Front View



Back View

Performance Table: CDL2-25W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CDL2-25CW	25W	120~277V	2880LM	5000K	B1-U2-G1	115
CDL2-25NW	25W	120~277V	2800LM	4000K	B1-U2-G2	112
CDL2-25WW	25W	120~277V	2780LM	3000K	B1-U2-G1	111

Sample Ordering

Model	Wattage	Color Temp.
CDL2	25W	
		WW = 3000K NW = 4000K CW = 5000K


Factory Installed Options

Blank = No Option For Factory-Installaed
 OPT-EM-FM1INT = INTERNAL EMERGENCY BACKUP BATTERY
 OPT-SEN-3MR-4 = PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR
 OPT-PC-B = PHOTOCELL
 WEC-8RC= OPTIONAL REMOTE CONTROL
 OPT-TRS-T20= TAMPER RESISTANT SCREW

SENSOR AND REMOTE CONTROL OPTIONS



MOUNTING OPTIONS

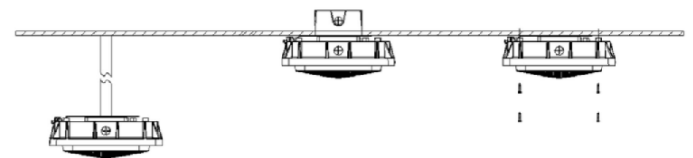

Example:

1. CDL2-25CW
(CDL2 25W 5000K fixture 120V-277V)
2. CDL2-25CW
WEC-8RC
(CDL2 25W 5000K fixture 120V-277V)
(Remote Control)
3. CDL2-25CW
WEC-8RC
OPT-SEN-3MR-4
(CDL2 25W 5000K fixture 120V-277V)
(Remote Control)
(Programmable Microwave Bi-Level)

WESTGATE

Phone: (877) 805-2252 | Fax: (877) 805-2252
 www.westgatemfg.com | www.westgatecontrols.co

