


DIMENSIONS:

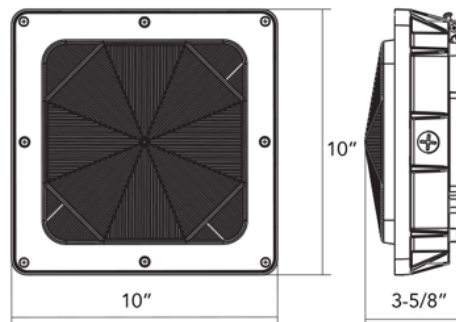

CDL2-45CW CDL2-45NW

LED CANOPY SERIES 2

This fixture has the advantages of thin, beautiful appearance, good heat dissipation, professional light distribution design, convenient installation and labor-saving.

ELECTRICAL SPECIFICATIONS:

- Voltage: 100~277VAC 50/60Hz
- Wattage: 45W
- Other wattages available: 60W (not DLC) and 80W
- Color Temperature: 4000K and 5000K
- Lumens: 4998LM
- LED: LUMILEDS
- Efficacy: 150LM/W
- Operating Temperature: -4°F ~ 122°F
- Dimmable: 0~10V dimmable
- CRI: >80
- IP Rating: IP65
- Life span: 50,000 hrs.
- Photoelectric motion sensor compatible
- Beam Angle: 150°


HOUSING SPECIFICATIONS:

- Housing: ADC12 aluminum heat sink, outdoor powder coating
- Lens: High light transmittance PC, anti-UV and fire resistant



WARRANTY: 7 years

MODEL	WATTS	VOLTS	LUMENS	COLOR TEMP
CDL2-45CW	45W	120~277V	4998LM	5000K
CDL2-45NW	45W	120~277V	4998LM	4000K

MOUNTING OPTIONS:

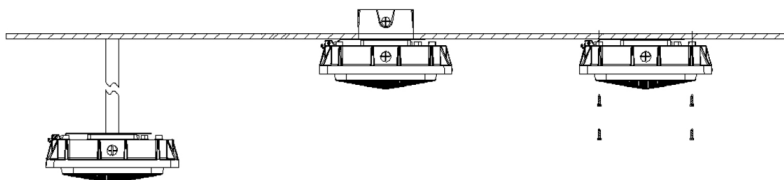

PHOTOMETRICS:

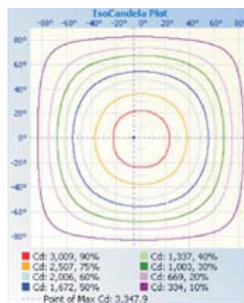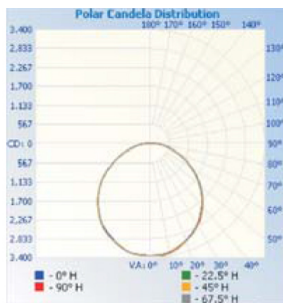

Center Beam fc	Beam Width
17.0ft	11.55 fc 48.3 ft 49.0 ft
34.0ft	2.89 fc 96.6 ft 98.1 ft
51.0ft	1.28 fc 144.9 ft 147.1 ft
68.0ft	0.72 fc 193.2 ft 196.1 ft
85.0ft	0.46 fc 241.5 ft 245.2 ft
102.0ft	0.32 fc 289.8 ft 294.2 ft

Vert. Spread: 109.7°
Horiz. Spread: 110.5°

CERTIFICATIONS:

