




**DIMENSIONS:**

6.7"(D) x 14.92"(H)

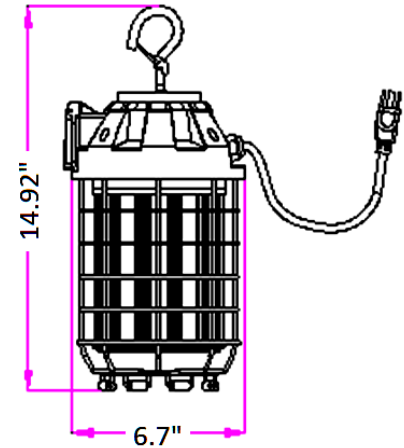

**CL-CONST-100W-50K-B1**

**LED CONSTRUCTION / TEMPORARY LIGHT**

Ideal for construction sites, Factory/residential renovation, dock and temporary locations.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 120-277VAC 50/60Hz
- Wattage: 100W
- Power factor: >0.9
- Max Run: 1650W - 17 Fixtures
- Efficacy: 120LM/W

**HOUSING SPECIFICATIONS:**

- PC & Aluminum housing
- Surge 4KV-6KV
- Operating temperature: -4°F ~ 113°F
- Lifespan: 50000 Hrs.
- IP rating: IP64, Wet Locations

**CERTIFICATIONS: UL**



**LIGHTING SPECIFICATIONS:**

- LED type/brand: Epistar 2835 SMD
- Total lumens: 12000LM
- Color temperature: 5000K
- Color rendering index: >80
- Beam angle: 360°

**WARRANTY: 5 years**

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
CL-CONST-100W-50K-B1	100W	120~277V AC	12000 LM	5000K

