


DIMENSIONS:

11.14"(H) x 5.11"(D)

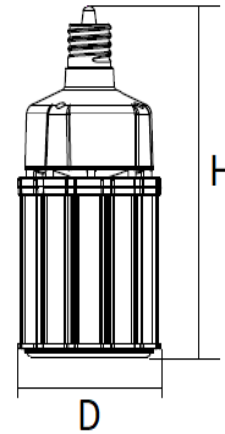

- CL-EHL-120W-30K-[E39;EX39]-B-C**
- CL-EHL-120W-35K-[E39;EX39]-B-C**
- CL-EHL-120W-40K-[E39;EX39]-B-C**
- CL-EHL-120W-45K-[E39;EX39]-B-C**
- CL-EHL-120W-50K-[E39;EX39]-B-C**
- CL-EHL-120W-57K-[E39;EX39]-B-C**

Note:

CL=Product Series
 EHL=Product Family
 27W=Rating Power
 cK=CCT, 30K=3000K, 35K=3500K, 40K=4000K,
 45K=4500K,50K=5000K, 57K=5700K
 E=represent the lamps base type, can be "E39" for E39, "EX39"
 for EX39
 B=LED manufacturer , Lumileds
 C=Cover type, Clear Cover

LED CORN LAMPS

Ideal for retrofitting existing HID highbay, shoebox, flood light or wall pack fixtures.

ELECTRICAL SPECIFICATIONS:

- Voltage: 100~277VAC, 50/60Hz
- Wattage: 120W
- Power factor: >0.90
- Efficacy: 105~125LM/W

HOUSING SPECIFICATIONS:

- Big heat sink, No fan
- PC and Aluminum housing and Sealant pouring for whole driver
- Meet 4KV surge immunity level
- Operating temperature: -40°F to 176°F
- Minimum Enclosed Space Dimension: 17.3"(H) x 9.4"(D) and 1547 Cubic in.
- Suitable for damp location

CERTIFICATIONS: UL



MODEL	WATTS	VOLTAGE	COLOR TEMP
CL-EHL-120W-30K-[E39;EX39]-B-C	120W	100~277VAC	3000K
CL-EHL-120W-35K-[E39;EX39]-B-C	120W	100~277VAC	3500K
CL-EHL-120W-40K-[E39;EX39]-B-C	120W	100~277VAC	4000K
CL-EHL-120W-45K-[E39;EX39]-B-C	120W	100~277VAC	4500K
CL-EHL-120W-50K-[E39;EX39]-B-C	120W	100~277VAC	5000K
CL-EHL-120W-57K-[E39;EX39]-B-C	120W	100~277VAC	5700K

LIGHTING SPECIFICATIONS:

- Lamp Base: E39 OR EX39
- LED Type: SMD2835
- Total lumens: 12600LM/15000LM
- Color temperature: 3000K/3500K/4000K/4500K/5000K/5700K
- Color rendering index: >80
- Beam angle: 360°

WARRANTY: 5 years

