

# CL-EHL SERIES Industrial Lighting

CL-EHL-54W-30K-E39

CL-EHL-54W-50K-E39




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

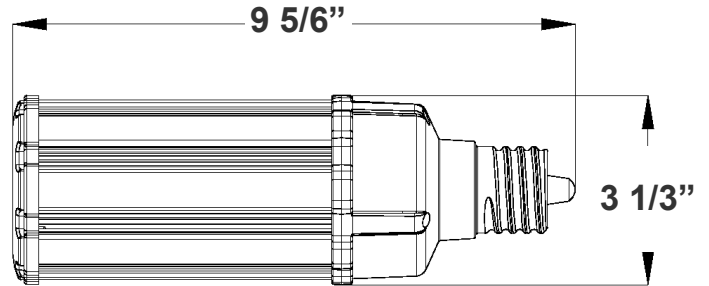

9 5/6"(H) x 3 1/3"(W)

LED Corn Lamp suitable for supermarkets, warehouses, garages, home, offices, hotels, hospitals, schools, high bay retrofitting

## Features

- E39 Mogul Base
- 5-Year Warranty
- Housing: PC + Aluminum
- 50,000 Hours Rated Life

## Technical Specifications

### Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 54W
- Power Factor: >0.9
- AC Direct / Bypass Existing Ballast
- THD: ≤20%
- Efficacy: 125/155 LPW

### Mechanical:

- PC and Aluminum Housing and Sealant Pouring For Whole Driver
- E39 Mogul Base
- Operating temperature: -40°F to 176°F
- Minimum Enclosed Space Dimension: 15.0"(H) x 7.9"(D) and 928 Cubic in
- Suitable for Damp Location

### Lighting:

- LED Type: SMD2835
- Total lumens: 6750LM/8370LM
- Color Temperature: 3000K/5000K
- Color Rendering index: >80
- Beam angle: 360°
- Replacement Range: 70-125MH

### Applications:


- LED Corn Lamp suitable for supermarkets, warehouses, garages, home, offices, hotels, hospitals, schools, highbay retrofitting

### Other Models:


- |                                      |  |  |
|--------------------------------------|--|--|
| • 12W   1500LM   CL-EHL-12W-30K-E26  | • 18W   2250LM   CL-EHL-18W-30K-E26    | • 27W   3375LM   CL-EHL-27W-30K-E26    |
| • 12W   1860LM   CL-EHL-12W-50K-E26  | • 18W   2610LM   CL-EHL-18W-50K-E26    | • 27W   4185LM   CL-EHL-27W-50K-E26    |
| • 36W   4500LM   CL-EHL-36W-30K-E26  | • 36W   4500LM   CL-EHL-36W-30K-E39    | • 45W   5625LM   CL-EHL-45W-30K-E39    |
| • 36W   5580LM   CL-EHL-36W-50K-E26  | • 36W   5580LM   CL-EHL-36W-50K-E39    | • 45W   6975LM   CL-EHL-45W-50K-E39    |
| • 75W   9375LM   CL-EHL-75W-30K-E39  | • 100W   12500LM   CL-EHL-100W-30K-E39 | • 120W   15600LM   CL-EHL-120W-30K-E39 |
| • 75W   11625LM   CL-EHL-75W-50K-E39 | • 100W   15500LM   CL-EHL-100W-50K-E39 | • 120W   17400LM   CL-EHL-120W-50K-E39 |



**Photometrics:** CL-EHL-54W-E39

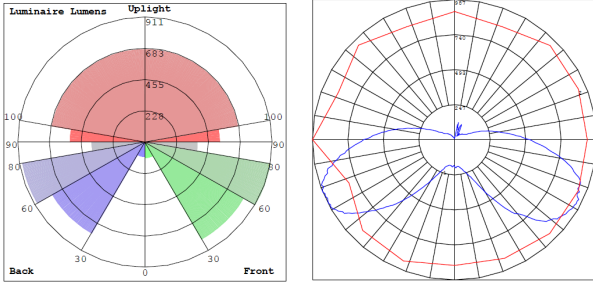

BUG Rating: B2-U4-G3

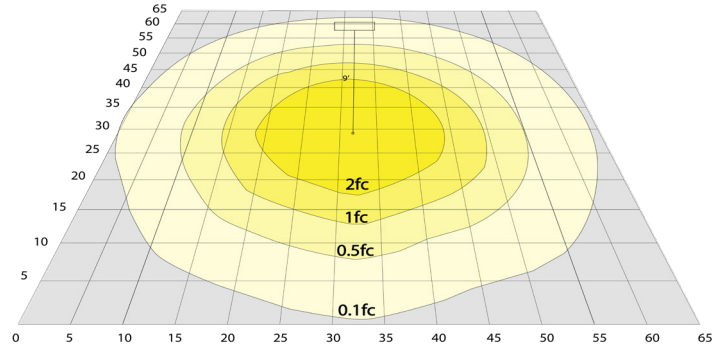

54W, 5000K Area 65'x 65' Mounting Height: 9'

**Other Views:**



Side View



Front View

**Performance Table:** CL-EHL-54W-E39

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CL-EHL-54W-30K-E39	54W	120~277V	6750	3000K	B2-U4-G3	125
CL-EHL-54W-50K-E39	54W	120~277V	8370	5000K	B2-U4-G3	155

**Sample Ordering**

**Model**   **Style**   **Wattage**   **Color Temp.**   **Base**  
 -  -  -  -   
 30K = 3000K  
 50K = 5000K

**Accessory:**

Blank = No Option For Accessories  
 E39-REDUCER = REDUCES E39 BULB TO BE USED IN E26 SOCKET

**ACCESSORY:**



E39-REDUCER

**Example:**

- CL-EHL-54W-30K-E39 (FOR CL EHL 54W 30K FIXTURE 120-277V)
- CL-EHL-54W-30K-E39 (FOR CL EHL 54W 30K FIXTURE 120-277V)  
 E39-REDUCER (REDUCES E39 BULB TO BE USED IN E26 SOCKET)

