




**DIMENSIONS:**

9.84"(H) x 5.11"(D)

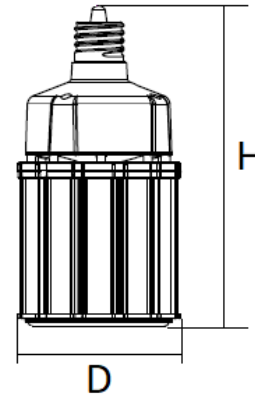

- CL-EHL-75W-30K-[E39;EX39]-B-C
- CL-EHL-75W-35K-[E39;EX39]-B-C
- CL-EHL-75W-40K-[E39;EX39]-B-C
- CL-EHL-75W-45K-[E39;EX39]-B-C
- CL-EHL-75W-50K-[E39;EX39]-B-C
- CL-EHL-75W-57K-[E39;EX39]-B-C

**Note:**

CL=Product Series  
 EHL=Product Family  
 27W=Rating Power  
 cK=CCT, 30K=3000K, 35K=3500K, 40K=4000K, 45K=4500K,50K=5000K, 57K=5700K  
 E=represent the lamps base type, can be "E39" for E39, "EX39" for EX39  
 B=LED manufacturer , Lumileds  
 C=Cover type, Clear Cover

**LED CORN LAMPS**

Ideal for retrofitting existing HID highbay, shoebox, flood light or wall pack fixtures.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 100~277VAC, 50/60Hz
- Wattage: 75W
- Power factor: >0.90
- Efficacy: 105~125LM/W

**HOUSING SPECIFICATIONS:**

- Big heat sink, No fan
- PC and Aluminum housing and Sealant pouring for whole driver
- Meet 4KV surge immunity level
- Operating temperature: -40°F to 176°F
- Minimum Enclosed Space Dimension: 16.5"(H) x 9.1"(D) and 1356 Cubic in.
- Suitable for damp location

**CERTIFICATIONS: UL**



MODEL	WATTS	VOLTAGE	COLOR TEMP
CL-EHL-75W-30K-[E39;EX39]-B-C	75W	100~277VAC	3000K
CL-EHL-75W-35K-[E39;EX39]-B-C	75W	100~277VAC	3500K
CL-EHL-75W-40K-[E39;EX39]-B-C	75W	100~277VAC	4000K
CL-EHL-75W-45K-[E39;EX39]-B-C	75W	100~277VAC	4500K
CL-EHL-75W-50K-[E39;EX39]-B-C	75W	100~277VAC	5000K
CL-EHL-75W-57K-[E39;EX39]-B-C	75W	100~277VAC	5700K

**LIGHTING SPECIFICATIONS:**

- Lamp Base: E39 OR EX39
- LED Type: SMD2835
- Total lumens: 7875~9375LM
- Color temperature: 3000K/3500K/4000K/4500K/5000K/5700K
- Color rendering index: >80
- Beam angle: 360°

**WARRANTY: 5 years**

