
CMC SERIES COMMERCIAL INDOOR LIGHTING



CMC2L-RGBW-BK CMC2L-RGBW-WH

CMC RGBW CYLINDER LIGHTS, PENDANT OR SURFACE MOUNT APP CONTROLLED



2" Cylinder, Pendant & Ceiling Cylinder Light, Aluminum Cylinder, White Aluminum Housing, Clear Glass Lens

Features

Triac Dimmable at 120V & 0-10V Dimming at 120-277V

Customer Name: Project Name: Note: 12" 4 1/2" 4 1/2" 4 1/2" 4 1/2" 4 1/2" 4 1/2" 4 1/2" 4 1/2"

12"(H) X 4 1/2"(W) X 2"(D)

- 7-Year Warranty
- Aluminum Base and Polycarbonate (PC) Lens

Technical Specifications

Electrical:

- Wattage: 6W
- Voltage: 120-277V
- Power Factor: >0.90
- THD: <20%
- Efficacy: 75 LPW

Mechanical:

- Aluminum Housing & Glass Lens
- Suspension Cable & Canopy Set Accessories Avail.
- Universal Swivel W/ Rod Kit Accessories Avail. Ambient Operating Temperature: -13°F to 113°F
- IP Rating: IP40 suitable for damp locations

Lighting:

- Color Temperatures: RGBW Seletable Trough Phone App
- Dimming: (Dual Function) Triac Dimmable at 120V & 0-10V Dimming at 120-277V
- Total Lumens: 300LM
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 25°
- Rated life: 70,000 hrs

Applications:

• 2" Cylinder, Pendant & Ceiling Cylinder Light, Aluminum Cylinder, White Aluminum Housing, Clear Glass Lens


Other Models:

• 9W | 550LM | CMC3-RGBW-BK

9W | 550LM | CM3-RGBW-WH



VG-1012202

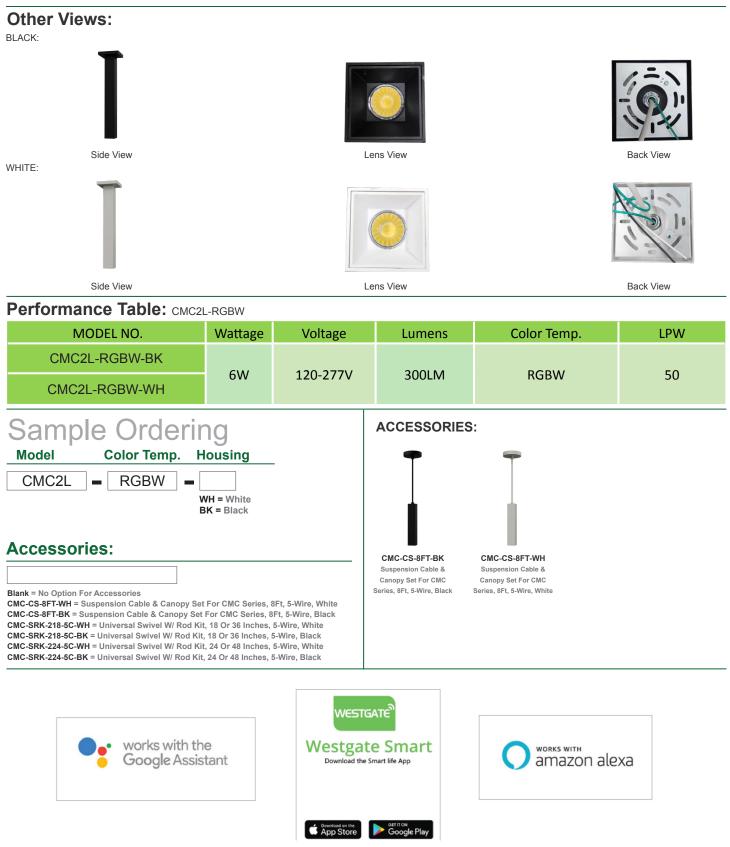

- For Setting Up The Light(s), Initial Internet Connection or Mobile Data Is Required.
- After the Initial Setup, Internet Connection is not Necessary Anymore. The lights Can Be Controlled with The Mobile App on The Phone or Tablet. Features Such as Dimming, Changing Colors, Lights Scenes, etc.
- Scheduling Feature Requires Internet Connection.
- Bluetooth Devices Need a Gateway (Sold Separately) In Order to Connect to WiFi Network (Internet)

WESTGATE