

CMC SERIES COMMERCIAL INDOOR LIGHTING

CMC4-RGBW-BK
CMC4-RGBW-WH



Shown with Suspended Cables (Not Incl.)

Avail Finish:





Customer Name: _____

Project Name: _____

Note: _____

Type: _____

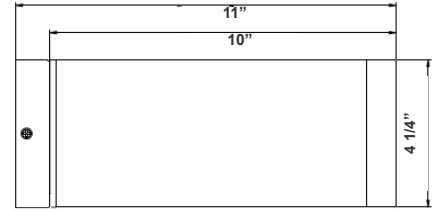

11"(H) X 4 1/4" (W) X 4"(D)

4" Cylinder, Pendant & Ceiling Cylinder Light, Aluminum Cylinder, White Aluminum Housing, Clear Glass Lens

Features

- Color Temperatures: RGBW Seletable Trough Phone App
- Triac Dimmable at 120V & 0-10V Dimming at 120-277V
- 7-Year Warranty
- Aluminum Base and Glass Lens

Technical Specifications

Electrical:

- Voltage: 120-277V
- Power Factor: >0.90
- THD: <20%
- Wattage: 15W
- Efficacy: 60 LPW

Mechanical:

- Aluminum Housing & Glass Lens
- Suspension Cable & Canopy Set Accessories Avail.
- Universal Swivel W/ Rod Kit Accessories Avail. Ambient Operating Temperature: -13°F to 113°F
- Rated life: 70,000 hrs
- IP Rating: IP40 suitable for damp locations

Lighting:

- Color Temperatures: RGBW Seletable Trough Phone App
- Dimming: (Dual Function) Triac Dimmable at 120V & 0-10V Dimming at 120-277V
- Total Lumens: 900LM Max.
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 40°

Applications:

- 4" Cylinder, Pendant & Ceiling Cylinder Light, Aluminum Cylinder, White Aluminum Housing, Clear Glass Lens

Other Models:

- 9W | 550LM | CMC3-RGBW-BK
- 9W | 550LM | CM3-RGBW-WH



Other Views:

BLACK:



Side View



Lens View



Back View

WHITE:



Side View



Lens View



Back View

Performance Table: CMC4-RGBW

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	LPW
CMC4-RGBW-BK	15W	120-277V	900LM	RGBW	50
CMC4-RGBW-WH					

Sample Ordering

Model Color Temp. Housing

CMC4 - RGBW -

WH = White
BK = Black

Accessories:

Blank = No Option For Accessories

- CMC4-TRM-AG = 4in Ceiling Mount Cylinder Trim, Anodized Gold
- CMC4-TRM-BN = 4in Ceiling Mount Cylinder Trim, Brushed Nickel
- CMC4-HCDK-BK = 4in Ceiling Mount Cylinder Honeycomb Diffuser Kit, Black
- CMC4-HCDK-AG = 4in Ceiling Mount Cylinder Honeycomb Diffuser Kit, Anodized Gold
- CMC4-FS14-WG-KIT = CMC4 14In Flat Shade, White/Gold
- CMC4-FS14-BG-KIT = CMC4 14In Flat Shade, Black/Gold
- CMC4-FS14-WS-KIT = CMC4 14In Flat Shade, White/Silver
- CMC4-FS14-BS-KIT = CMC4 14In Flat Shade, Black/Silver
- CMC4-DS14-WG-KIT = CMC4 14In Dome Shade, White/Gold
- CMC4-DS14-BG-KIT = CMC4 14In Dome Shade, Black/Gold
- CMC4-DS14-WS-KIT = CMC4 14In Dome Shade, White/Silver
- CMC4-DS14-BS-KIT = CMC4 14In Dome Shade, Black/Silver
- CMC4-PCR = 12In Dia. Prismatic Pc Highbay Reflector For CMC4
- CMC4-WPCK-WH = CMC4 Weatherproof Conversion Kit For Cord Or Down-Rod, White
- CMC4-WPCK-BK = CMC4 Weatherproof Conversion Kit For Cord Or Down-Rod, Black
- CMC-CS-8FT-WH = Suspension Cable & Canopy Set For CMC Series, 8Ft, 5-Wire, White
- CMC-CS-8FT-BK = Suspension Cable & Canopy Set For CMC Series, 8Ft, 5-Wire, Black
- CMC-SRK-218-5C-WH = Universal Swivel W/ Rod Kit, 18 Or 36 Inches, 5-Wire, White
- CMC-SRK-218-5C-BK = Universal Swivel W/ Rod Kit, 18 Or 36 Inches, 5-Wire, Black
- CMC-SRK-224-5C-WH = Universal Swivel W/ Rod Kit, 24 Or 48 Inches, 5-Wire, White
- CMC-SRK-224-5C-BK = Universal Swivel W/ Rod Kit, 24 Or 48 Inches, 5-Wire, Black
- CMC46-ULK = 5W 400LM 30K.40K/50K Up Light Kit

Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-8120AC = Emergency Backup with Extension Cylinder

ACCESSORIES:



CMC4-TRM-AG
Trim, Anodized Gold



CMC4-TRM-BN
Trim, Brushed Nickel



CMC4-HCDK-BK
Honeycomb Diffuser
Kit, Black



CMC4-HCDK-AG
Honeycomb Diffuser Kit,
Anodized Gold



CMC-CS-8FT-BK
Suspension Cable &
Canopy Set For CMC
Series, 8Ft, 5-Wire, Black



CMC-CS-8FT-WH
Suspension Cable &
Canopy Set For CMC
Series, 8Ft, 5-Wire, White



CMC46-ULK
Shown with Up Light Kit


FACTORY-INSTALLED OPTION:



OPT-EM-8120AC




ACCESSORIES:




5.12" (W) X 8.98" (H)

CMC4-MCTP-DD-BK+CMC-CS-8FT-BK
CMC4-MCTP-DD-WH+CMC-CS-8FT-WH

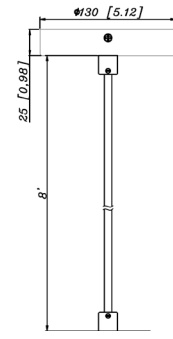


5.12" (W) X 8.98" (H)




5.59" (W) X 7.78" (H) X 12.2" (D)

CMC4-MCTP-DD-BK+CMC-CS-8FT-BK+CMC4-PCR
CMC4-MCTP-DD-WH+CMC-CS-8FT-WH+CMC4-PCR

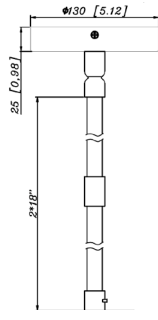


5.12" (W) X 36.98" (H)

CMC4-MCTP-DD-BK+CMC-SRK-218-5C-BK
CMC4-MCTP-DD-WH+CMC-SRK-218-5C-WH

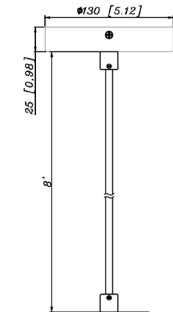


5.12" (W) X 8.98" (H)




6.7" (W) X 4.59" (D)

CMC4-MCTP-DD-BK+CMC-CS-8FT-BK+CMC4-WPCK-BK
CMC4-MCTP-DD-WH+CMC-CS-8FT-WH+CMC4-WPCK-WH




5.12" (W) X 8.98" (H)

CMC4-MCTP-DD-BK+CMC-CS-8FT-BK+CMC4-DS14-BG
CMC4-MCTP-DD-WH+CMC-CS-8FT-WH+CMC4-DS14-WG




5.12" (W) X 8.98" (H)




4.92" (W) X 9.37" (H) X 14.25" (D)

CMC4-MCTP-DD-BK+CMC-CS-8FT-BK+CMC4-DS14-BG
CMC4-MCTP-DD-WH+CMC-CS-8FT-WH+CMC4-DS14-WG

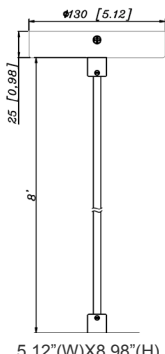


5.12" (W) X 8.98" (H)




11.81" (W) X 5.59" (H) X 13.46" (H)

CMC4-MCTP-DD-BK+CMC-CS-8FT-BK+CMC4-FS14-BG
CMC4-MCTP-DD-WH+CMC-CS-8FT-WH+CMC4-FS14-WG

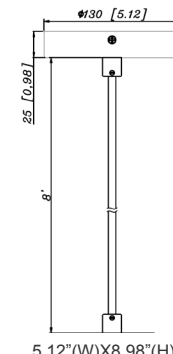


5.12" (W) X 8.98" (H)




11.81" (W) X 5.59" (H) X 13.46" (H)

CMC4-MCTP-DD-BK+CMC-CS-8FT-BK+CMC4-FS14-BG
CMC4-MCTP-DD-WH+CMC-CS-8FT-WH+CMC4-FS14-WG






5.12"(W)X36.98"(H)




CMC4-MCTP-DD-BK+CMC-SRK-218-5C-BK+CMC4-HCDK-AG
CMC4-MCTP-DD-WH+CMC-SRK-218-5C-WH+CMC4-HCDK-BK




5.12"(W)X8.98"(H)



CMC4-MCTP-DD-BK+CMC-CS-8FT-BK+CMC4-TRM-AG
CMC4-MCTP-DD-WH+CMC-CS-8FT-WH+CMC4-TRM-BN

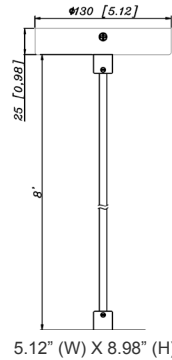


5.12" (W) X 8.98" (H)



5.71" (W) X 1.26" (H) X 5.71" (D)



CMC4-MCTP-DD-BK+CMC-CS-8FT-BK+CMC4-DL32
CMC4-MCTP-DD-WH+CMC-CS-8FT-WH+CMC4-DL32

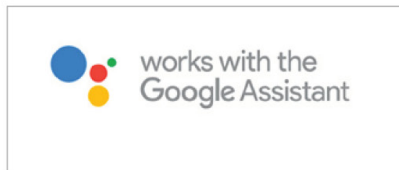

- For Setting Up The Light(s), Initial Internet Connection or Mobile Data Is Required.
- After the Initial Setup, Internet Connection is not Necessary Anymore. The lights Can Be Controlled with The Mobile App on The Phone or Tablet. Features Such as Dimming, Changing Colors, Lights Scenes, etc.
- Scheduling Feature Requires Internet Connection.
- Bluetooth Devices Need a Gateway (Sold Separately) In Order to Connect to WiFi Network (Internet)

