

CMC SERIES

COMMERCIAL LIGHTING


CMC5-MILAN2-MCTP-DD-GD

CMC5-MILAN2-MCTP-DD-BN


MCTP



Gold/Black Brush Nickel/Black



Technical Drawing: 4 1/2" (D) x 5 1/8" (W) x 100" (H)

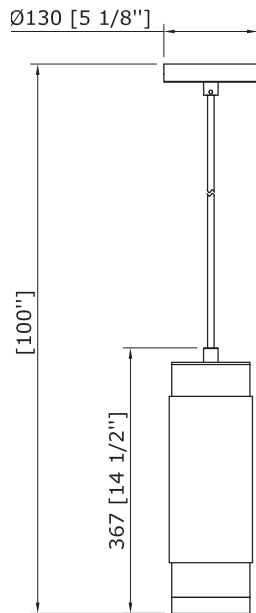

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

FEATURES:

- 5" architectural cylinder pendant with clean, modern design
- Durable metal housing for long-lasting performance
- Includes 7' adjustable suspension power cable (5-wire SJ cord)
- Includes canopy for standard 3" or 4" junction box installation
- Provides smooth, high-quality illumination
- Available in premium architectural finishes for modern interiors

SPECIFICATIONS:

ELECTRICAL:

- Input voltage: 120-277VAC, 50/60Hz
- Wattage selectable: 12W / 16W / 20W
- Dual dimming: TRIAC dimming at 120V and 0-10V dimming at 120-277V
- Integrated LED driver
- Total harmonic distortion (THD): <20%

MECHANICAL:

- 5" architectural cylinder pendant luminaire
- Aluminum housing with glass lens
- Decorative cylindrical architectural design
- Finish options:
 - Gold / Black
 - Brushed Nickel / Black
- Includes 7' adjustable suspension power cable (5-wire SJ cord)
- Includes canopy compatible with standard 3" or 4" junction boxes
- Field-adjustable suspension length for flexible installation heights
- 5-year warranty

LIGHTING:

- Efficacy: 80 LM/W
- Selectable CCT: 3000K / 4000K / 5000K
- CRI: ≥80
- Beam angle: 120°
- Integrated LED light source
- 50,000-hour rated LED life

APPLICATIONS:

- Restaurants
- Hospitality spaces
- Retail stores
- Residential interiors
- Lobbies and reception areas
- Corridors and hallways
- Decorative accent lighting

The MILAN Series 5" Architectural Cylinder Pendants are decorative luminaires designed for modern commercial and residential interiors such as hospitality, retail, and high-end residential spaces. Featuring selectable wattage (12W/16W/20W) and 3CCT selectable color temperatures (3000K/4000K/5000K), the fixture provides flexible lighting performance. A glass lens delivers smooth 120° light distribution with CRI ≥80, while dual dimming supports TRIAC dimming at 120V and 0-10V dimming at 120-277V. The luminaire includes a 7-ft adjustable suspension power cable with canopy for installation to standard 3" or 4" junction boxes, allowing clean pendant mounting and flexible installation heights.

PERFORMANCE TABLE

MODEL NO.	WATTAGE	VOLTAGE	LUMENS	COLOR TEMP.	LPW
CMC5-MILAN2-MCTP-DD-GD CMC5-MILAN2-MCTP-DD-BN	12W 16W 20W	120-277V	960LM 1280LM 1600LM	3000K 4000K 5000K	80