

# CMC SERIES COMMERCIAL INDOOR LIGHTING

CMC6-RGBW-BK  
CMC6-RGBW-WH



Shown With  
Suspension cable

Avail Finish:





Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

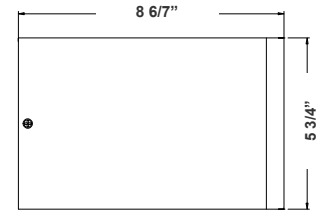

8 6/7"(H) X 5 3/4" (W) X 6" (D)

6" Cylinder, Pendant & Ceiling Cylinder Light, Aluminum  
Cylinder, White Aluminum Housing, Clear Glass Lens

## Features

- Color Temperatures: RGBW Seletable Trough Phone App
- Triac Dimmable at 120V & 0-10V Dimming at 120-277V
- 7-Year Warranty
- Aluminum Base and Glass Lens

## Technical Specifications

### Electrical:

- Voltage: 120-277V
- Power Factor: >0.90
- THD: <20%
- Wattage: 20W
- Efficacy: 60 LPW

### Mechanical:

- Aluminum Housing & Glass Lens
- Suspension Cable & Canopy Set Accessories Avail.
- Universal Swivel W/ Rod Kit Accessories Avail. Ambient Operating Temperature: -13°F to 113°F
- Rated life: 70,000 hrs
- IP Rating: IP40 suitable for damp locations

### Lighting:

- Color Temperatures: RGBW Seletable Trough Phone App
- Dimming: (Dual Function) Triac Dimmable at 120V & 1-10V Dimming at 120-277V
- Total Lumens: 1200LM Max.
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 120°

### Applications:

- 6" Cylinder, Pendant & Ceiling Cylinder Light, Aluminum Cylinder, White Aluminum Housing, Clear Glass Lens

### Other Models:

- 9W | 550LM | CMC3-RGBW-BK
- 9W | 550LM | CM3-RGBW-WH



## Other Views:

BLACK:



Side View



Lens View



Back View

WHITE:



Side View



Lens View



Back View

## Performance Table: CMC6-RGBW

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	LPW
CMC6-RGBW-BK	20W	120-277V	1200LM	RGBW	60
CMC6-RGBW-WH					

## Sample Ordering

**Model Color Temp. Housing**

CMC6 - MCTP -

WH = White  
BK = Black

## Accessories:

Blank = No Option For Accessories

CMC6-TRM-AG = 6in Ceiling Mount Cylinder Trim, Anodized Gold

CMC6-TRM-BN = 6in Ceiling Mount Cylinder Trim, Brushed Nickel

CMC46-ULK = Uplight kit

CMC6-WPCK-WH = CMC6 Weatherproof Conversion Kit For Cord Or Down-Rod, White

CMC6-WPCK-BK = CMC6 Weatherproof Conversion Kit For Cord Or Down-Rod, Black

CMC6-HCDK-BK = 6in Ceiling Mount Cylinder Honeycomb Diffuser Kit, Black

CMC6-HCDK-AG = 6in Ceiling Mount Cylinder Honeycomb Diffuser Kit, Anodized Gold

CMC-CS-8FT-WH = Suspension Cable & Canopy Set For CMC Series, 8Ft, 5-Wire, White

CMC-CS-8FT-BK = Suspension Cable & Canopy Set For CMC Series, 8Ft, 5-Wire, Black

CMC-SRK-218-5C-WH = Universal Swivel W/ Rod Kit, 18 Or 36 Inches, 5-Wire, White

CMC-SRK-218-5C-BK = Universal Swivel W/ Rod Kit, 18 Or 36 Inches, 5-Wire, Black

CMC-SRK-224-5C-WH = Universal Swivel W/ Rod Kit, 24 Or 48 Inches, 5-Wire, White

CMC-SRK-224-5C-BK = Universal Swivel W/ Rod Kit, 24 Or 48 Inches, 5-Wire, Black

CMC-SRK-340-5C-WH = Universal Swivel W/ Rod Kit, 40 Or 80 Or 120 Inches, 5-Wire, White

CMC-SRK-340-5C-BK = Universal Swivel W/ Rod Kit, 40 Or 80 Or 120 Inches, 5-Wire, Black

CMC-OWCC = 5" OLD-WORK RECESSED CEILING CANOPY WITH JUNCTION BOX

## Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-CMC46 = Emergency Backup with Extension Cylinder

## ACCESSORIES:



CMC6-TRM-AG  
Trim, Anodized Gold



CMC6-TRM-BN  
Trim, Brushed Nickel



CMC6-HCDK-BK  
Honeycomb Diffuser  
Kit, Black



CMC6-HCDK-AG  
Honeycomb Diffuser Kit,  
Anodized Gold



CMC-CS-8FT-BK  
Suspension Cable &  
Canopy Set For CMC  
Series, 8Ft, 5-Wire, Black



CMC-CS-8FT-WH  
Suspension Cable &  
Canopy Set For CMC  
Series, 8Ft, 5-Wire, White


## FACTORY-INSTALLED OPTION:




OPT-EM-CMC46





**ACCESSORIES:**

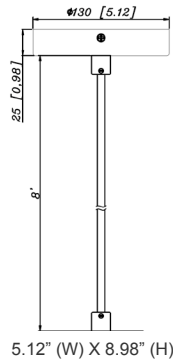

CMC6-MCTP-DD-BK+CMC-CS-8FT-BK  
CMC6-MCTP-DD-WH+CMC-CS-8FT-WH

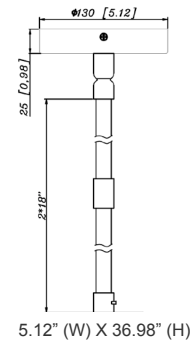


CMC6-MCTP-DD-BK+CMC-SRK-218-5C-BK  
CMC6-MCTP-DD-WH+CMC-SRK-218-5C-WH

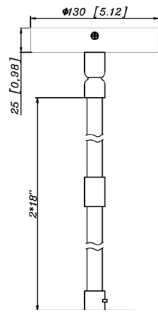

5.12" (W) X 36.98" (H)



5.87" (W) X 0.67" (H)

CMC6-MCTP-DD-BK+CMC-SRK-218-5C-BK+CMC6-WPCK-BK  
CMC6-MCTP-DD-WH+CMC-SRK-218-5C-WH +CMC6-WPCK-WH

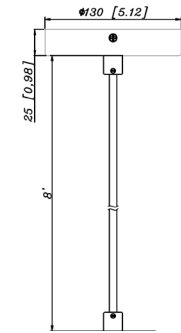


5.12" (W) X 8.98" (H)

CMC6-MCTP-DD-BK+CMC-CS-8FT-BK+CMC6-TRM-AG  
CMC6-MCTP-DD-WH+CMC-CS-8FT-WH+CMC6-TRM-BN

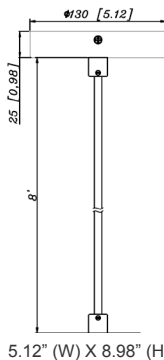


CMC6-MCTP-DD-BK+CMC-CS-8FT-BK+CWMC6-DL32  
CMC6-MCTP-DD-WH+CMC-CS-8FT-WH+CWMC6-DL32

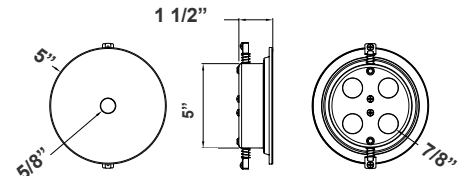

1 1/2" (H) X 5" (W) X 5" (D)

CMC6-MCTP-DD-BK+CMC-OWCC-BK+CMC-SRK-218-5C-BK+CMC6-TRM-AG  
CMC6-MCTP-DD-WH+CMC-OWCC-WH+CMC-SRK-218-5C-WH+CMC6-TRM-AG

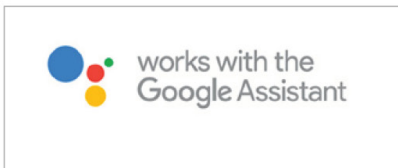

- For Setting Up The Light(s), Initial Internet Connection or Mobile Data Is Required.
- After the Initial Setup, Internet Connection is not Necessary Anymore. The lights Can Be Controlled with The Mobile App on The Phone or Tablet. Features Such as Dimming, Changing Colors, Lights Scenes, etc.
- Scheduling Feature Requires Internet Connection.
- Bluetooth Devices Need a Gateway (Sold Separately) In Order to Connect to WiFi Network (Internet)

