


JOB NAME: _____

DATE: _____

TYPE: _____



DIMENSIONS:

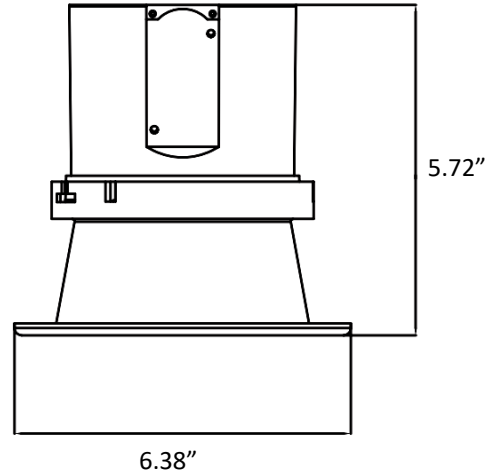

- CRLC4-15W-30K-SA-D CRLC4-15W-30K-SA-D-WH
- CRLC4-15W-40K-SA-D CRLC4-15W-40K-SA-D-WH
- CRLC4-15W-50K-SA-D CRLC4-15W-50K-SA-D-WH
- CRLC4-15W-MCT-SA-D CRLC4-15W-MCT-SA-D-WH

4" LED COMMERCIAL RECESSED LIGHT

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 15W
- Power factor: >0.90
- Efficacy: 80~85LM/W

HOUSING SPECIFICATIONS:

- 4" Haze or White Finish Square wall wash TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed to operate in temperatures 113°F
- No IC-Rated
- Lifespan: 50,000 hrs.
- Suitable for Damp Locations

CERTIFICATIONS: UL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP	FINISH
CRLC4-15W-30K-SA-D	15W	120~277VAC	1200LM	3000K	HAZE
CRLC4-15W-40K-SA-D	15W	120~277VAC	1245LM	4000K	HAZE
CRLC4-15W-50K-SA-D	15W	120~277VAC	1275LM	5000K	HAZE
CRLC4-15W-MCT-SA-D	15W	120~277VAC	1275LM	MCT	HAZE
CRLC4-15W-30K-SA-D-WH	15W	120~277VAC	1200LM	3000K	WHITE
CRLC4-15W-40K-SA-D-WH	15W	120~277VAC	1245LM	4000K	WHITE
CRLC4-15W-50K-SA-D-WH	15W	120~277VAC	1275LM	5000K	WHITE
CRLC4-15W-MCT-SA-D-WH	15W	120~277VAC	1275LM	MCT	WHITE

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V Dimmable
- Recommended Dimmers: DTVT(LUTRON),IP710(LEVITON)
- Total lumens: 1200~1275LM
- Color temperature: 5000K/4000K/3000K & MCT: 3000K/4000K/5000K
- Color rendering index: >80

WARRANTY: 5 years



JOB NAME: _____


DATE: _____

TYPE: _____

CRLC4-15W-30K-SA-D CRLC4-15W-30K-SA-D-WH
 CRLC4-15W-40K-SA-D CRLC4-15W-40K-SA-D-WH
 CRLC4-15W-50K-SA-D CRLC4-15W-50K-SA-D-WH
 CRLC4-15W-MCT-SA-D CRLC4-15W-MCT-SA-D-WH

4" LED COMMERCIAL RECESSED LIGHT

PHOTOMETRY CHART:

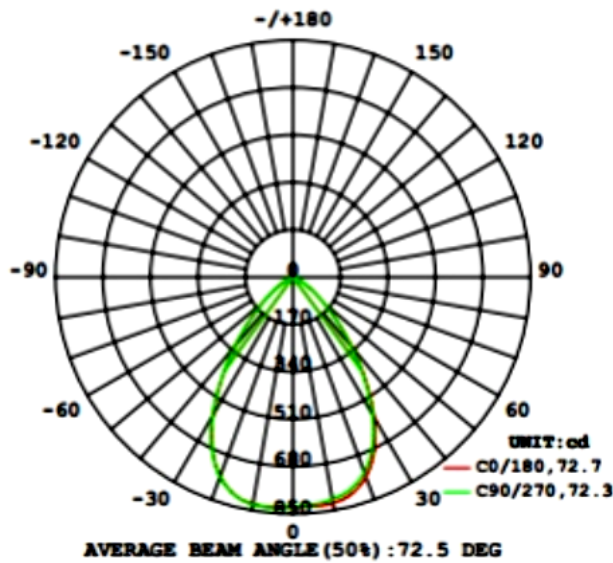

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP	FINISH
CRLC4-15W-30K-SA-D	15W	120~277VAC	1200LM	3000K	HAZE
CRLC4-15W-40K-SA-D	15W	120~277VAC	1245LM	4000K	HAZE
CRLC4-15W-50K-SA-D	15W	120~277VAC	1275LM	5000K	HAZE
CRLC4-15W-MCT-SA-D	15W	120~277VAC	1275LM	MCT	HAZE
CRLC4-15W-30K-SA-D-WH	15W	120~277VAC	1200LM	3000K	WHITE
CRLC4-15W-40K-SA-D-WH	15W	120~277VAC	1245LM	4000K	WHITE
CRLC4-15W-50K-SA-D-WH	15W	120~277VAC	1275LM	5000K	WHITE
CRLC4-15W-MCT-SA-D-WH	15W	120~277VAC	1275LM	MCT	WHITE

TWO WAYS TO ORDER :



1.ORDER COMPLETE UNIT	2.ORDER ENGINE & TRIM SEPARATELY	
	ENGINE	TRIM
CRLC4-15W-30K-SA-D	CRLC-ENG-15W-30K-D +	CRLC-TRM-4SA
CRLC4-15W-40K-SA-D	CRLC-ENG-15W-40K-D +	CRLC-TRM-4SA
CRLC4-15W-50K-SA-D	CRLC-ENG-15W-50K-D +	CRLC-TRM-4SA
CRLC4-15W-MCT-SA-D	CRLC-ENG-15W-MCT-D +	CRLC-TRM-4SA
CRLC4-15W-30K-SA-D-WH	CRLC-ENG-15W-30K-D +	CRLC-TRM-4SA-WH
CRLC4-15W-40K-SA-D-WH	CRLC-ENG-15W-40K-D +	CRLC-TRM-4SA-WH
CRLC4-15W-50K-SA-D-WH	CRLC-ENG-15W-50K-D +	CRLC-TRM-4SA-WH
CRLC4-15W-MCT-Sa-D-WH	CRLC-ENG-15W-MCT-D +	CRLC-TRM-4SA-WH

