

JOB NAME: _____

DATE: _____

TYPE: _____



- CRLC6-20W-30K-S-D CRLC6-20W-30K-S-D-WH
- CRLC6-20W-40K-S-D CRLC6-20W-40K-S-D-WH
- CRLC6-20W-50K-S-D CRLC6-20W-50K-S-D-WH
- CRLC6-20W-MCT-S-D CRLC6-20W-MCT-S-D-WH

6" LED COMMERCIAL RECESSED LIGHT

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 20W
- Power factor: >0.90
- Efficacy: 80~85LM/W


HOUSING SPECIFICATIONS:

- 6" Haze or White Finish Square Trim
- Mounting Options: Recessed
- Temperature Rating: Designed to operate in temperatures 113°F
- No IC-Rated
- Lifespan: 50,000 hrs.
- Suitable for Damp Locations

CERTIFICATIONS: UL



DIMENSIONS:

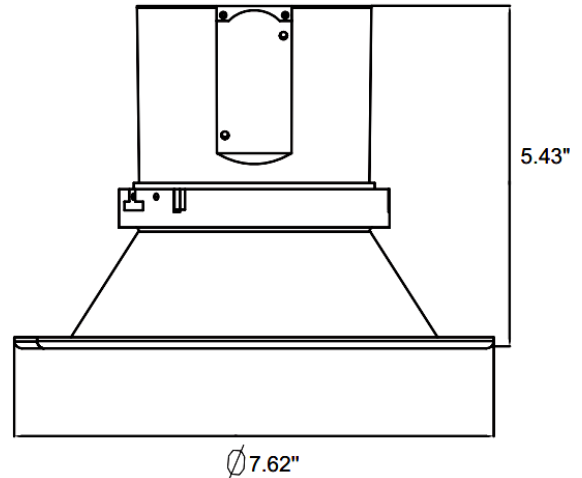

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP	FINISH
CRLC6-20W-30K-S-D	20W	120~277VAC	1600LM	3000K	HAZE
CRLC6-20W-40K-S-D	20W	120~277VAC	1640LM	4000K	HAZE
CRLC6-20W-50K-S-D	20W	120~277VAC	1720LM	5000K	HAZE
CRLC6-20W-MCT-S-D	20W	120~277VAC	1720LM	MCT	HAZE
CRLC6-20W-30K-S-D-WH	20W	120~277VAC	1600LM	3000K	WHITE
CRLC6-20W-40K-S-D-WH	20W	120~277VAC	1640LM	4000K	WHITE
CRLC6-20W-50K-S-D-WH	20W	120~277VAC	1720LM	5000K	WHITE
CRLC6-20W-MCT-S-D-WH	20W	120~277VAC	1720LM	MCT	WHITE

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V Dimmable
- Recommended Dimmers: DVTV(LUTRON),IP710(LEVITON)
- Total lumens: 1600~1720LM
- Color temperature: 5000K/4000K/3000K & MCT: 3000K/4000K/5000K
- Color rendering index: >80

WARRANTY: 5 years



JOB NAME: _____


DATE: _____

TYPE: _____

- CRLC6-20W-30K-S-D CRLC6-20W-30K-S-D-WH
- CRLC6-20W-40K-S-D CRLC6-20W-40K-S-D-WH
- CRLC6-20W-50K-S-D CRLC6-20W-50K-S-D-WH
- CRLC6-20W-MCT-S-D CRLC6-20W-MCT-S-D-WH

6" LED COMMERCIAL RECESSED LIGHT

PHOTOMETRY CHART:

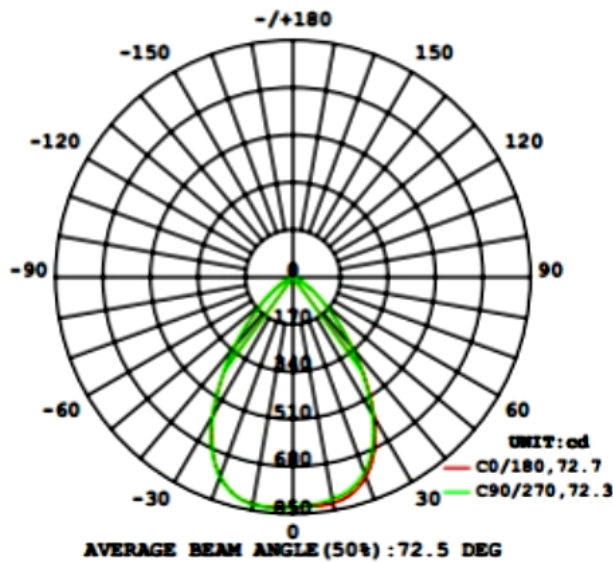

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP	FINISH
CRLC6-20W-30K-S-D	20W	120~277VAC	1600LM	3000K	HAZE
CRLC6-20W-40K-S-D	20W	120~277VAC	1640LM	4000K	HAZE
CRLC6-20W-50K-S-D	20W	120~277VAC	1720LM	5000K	HAZE
CRLC6-20W-MCT-S-D	20W	120~277VAC	1720LM	MCT	HAZE
CRLC6-20W-30K-S-D-WH	20W	120~277VAC	1600LM	3000K	WHITE
CRLC6-20W-40K-S-D-WH	20W	120~277VAC	1640LM	4000K	WHITE
CRLC6-20W-50K-S-D-WH	20W	120~277VAC	1720LM	5000K	WHITE
CRLC6-20W-MCT-S-D-WH	20W	120~277VAC	1720LM	MCT	WHITE

TWO WAYS TO ORDER :



1.ORDER COMPLETE UNIT	2.ORDER ENGINE & TRIM SEPARATELY	
	ENGINE	TRIM
CRLC6-20W-30K-S-D	CRLC-ENG-20W-30K-D +	CRLC-TRM-6S
CRLC6-20W-40K-S-D	CRLC-ENG-20W-40K-D +	CRLC-TRM-6S
CRLC6-20W-50K-S-D	CRLC-ENG-20W-50K-D +	CRLC-TRM-6S
CRLC6-20W-MCT-S-D	CRLC-ENG-20W-MCT-D +	CRLC-TRM-6S
CRLC6-20W-30K-S-D-WH	CRLC-ENG-20W-30K-D +	CRLC-TRM-6S-WH
CRLC6-20W-40K-S-D-WH	CRLC-ENG-20W-40K-D +	CRLC-TRM-6S-WH
CRLC6-20W-50K-S-D-WH	CRLC-ENG-20W-50K-D +	CRLC-TRM-6S-WH
CRLC6-20W-MCT-S-D-WH	CRLC-ENG-20W-MCT-D +	CRLC-TRM-6S-WH

