# CRLC SERIES COMMERCIAL INDOOR LIGHTING



CRLC10-60W-MCTP-D CRLC10-60W-MCTP-D-WH CRLC10-60W-MCTP-D-RG

10" LED COMMERCIAL SQUARE & WALL WASH RECESSED LIGHT

Mari Color Temperature (Selectable)

**Customer Name:** Project Name: Type: Note:





11.19"(W) X 8.9" (H) X 4.1" (D)

LED COMMERCIAL RECESSED LIGHT offers energy-efficient, high-performance illumination designed for commercial spaces, ensuring durability and optimal lighting quality.

## eatures

- 10" Haze & White Finish TRIM
- MCTP: The switch is on the light engine
- Mounting Options: Recessed

- 5-Year Warranty
- Lifespan: 50,000 hrs.

# **Technical Specifications**

#### **Electrical:**

Voltage: 120-277V AC 50/60Hz Wattage: 40W/50W/60W Power Factor: >0.90

Efficacy: 80 LPW

#### Mechanical:

- 10" Haze, Rose gold & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed to operate in temperatures 113°F
- No IC-Rated
- Suitable for Damp Locations
- 5-Year Warranty

### Lighting:

- MCTP: The switch is on the light engine
- Dimming: 0~10V Dimmable
- Total lumens: 4800LM Max.
- Color Temperature: 3000K/3500K/4000K
- Color Rendering index: >80
- Lifespan: 50,000 hrs.

### **Applications:**

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.














#### Photometrics: CRLC10-60W-MCTP-D





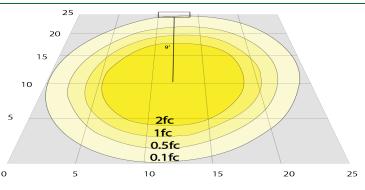

BUG Rating: B1-U1-G0

40W 5000K, Area 25" x 25' Mounting Height: 9'

#### **Other Views:**









CRLC-EGN-60W-MCTP-D

CRLC-TRM-8

CRLC10-60W-MCTP-D











Rose Gold











CRLC-EGN-60W-MCTP-D

CRLC-TRM-8-WH

CRLC10-60W-MCTP-D-WH

#### Performance Table: CRLC10-60W-MCTP-D

| MODEL NO.   | Wattage           | Voltage  | Lumens                     | Color Temp.             | BUG Rating | LPW |
|---|-------------------|----------|----------------------------|-------------------------|------------|-----|
| CRLC10-60W-MCTP-D<br>CRLC10-60W-MCTP-D-WH<br>CRLC10-60W-MCTP-D-RG | 40W<br>50W<br>60W | 120-277V | 3200LM<br>4000LM<br>4800LM | 3000K<br>3500K<br>4000K | B1-U1-G0   | 80  |

# Sample Ordering

Watt Color Temp Dimming Housing

CRLC10 **=** 60W **=** MCTP Blank

WH = WHITE

#### **Factory-Installed Option:**

# **OPT-EM-CRLC** EXTERNAL EMERGENCY

BACK UP BATTERY

### **Factory-Installed Option:**

Blank = No Option For Accessories OPT-EM-CRLC = EXTERNAL EMERGENCY BACK UP BATTERY





