# CRLC SERIES COMMERCIAL INDOOR LIGHTING



CRLC4-15W-30K-A-D CRLC4-15W-30K-A-D-WH

4" LED COMMERCIAL RECESSED LIGHT




Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

**Customer Name:** 

Project Name:

Note: Type:



2 3/4"(H) X 4 1/4"(W) X 6 1/3" (D)

## -eatures

- 4" Haze & White Finish TRIM
- MCT: The switch is on the light engine
- Mounting Options: Recessed

- 5-Year Warranty
- Lifespan: 50,000 hrs.

## **Technical Specifications**

#### **Electrical:**

Voltage: 120-277VAC 50/60Hz

Wattage: 15W Power factor: >0.90 Efficacy: 85 LPW

#### Mechanical:

- 4" Haze & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed to operate in temperatures 113°F
- IC-Rated
- Suitable for Damp Locations
- 5-Year Warranty

### Lighting:

- MCT: The switch is on the light engine
- Dimming: 0~10V Dimmable
- Total lumens: 1275LM
- Color temperature: 3000K/4000K/5000K
- Color rendering index: >80
- Lifespan: 50,000 hrs.

## **Applications:**

Direct Fit 4 T8 LED tubes do not burn out easily and provide bright and even lighting to schools, office spaces, retail stores and storage rooms.

#### Other Models:

- 20W | 1720LM | CRLC4-20W-MCT-A-D
- 20W | 1720LM | CRLC4-20W-MCT-A-D-WH














### Photometrics: CRLC4-15W-MCT-A-D





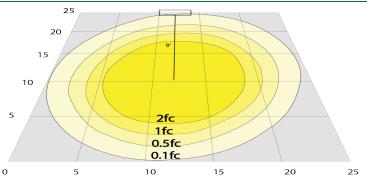

BUG Rating: B1-U1-G0

15W 5000K, Area 25" x 25' Mounting Height: 9'

#### **Other Views:**









CRLC-TRM-4A

=



CRLC4-15W-MCT-A-D

Whitev







CRLC-TRM-4A-WH



CRLC4-15W-MCT-A-D-WH

## Performance Table: CRLC4-15W-MCT-A-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLC4-15W-MCT-A-D	15W	120-277V	1275LM	3000K 4000K 5000K	B1-U1-G0	85
CRLC4-15W-MCT-A-D-WH						

WH = WHITE

# Sample Ordering

Model Watt Color Temp. Dimming Housing

CRLC4 = 15W = MCT = A = D = Blank

### **Accessory:**

Blank = No Option For Accessories

 ${\sf CRLE-RI-UNV}$  = SNAP-IN COMM. RECESSED LIGHT UNIVERSAL ROUGH-IN PLATE

## **Factory-Installed Option:**

Blank = No Option For Accessories
OPT-EM-HB1EXT = EXTERNAL EMERGENCY BACK UP BATTERY

#### Accessory:



#### **Factory-Installed Option:**





