CRLC SERIES COMMERCIAL INDOOR LIGHTING



CRLC4-20W-MCT-D CRLC4-20W-MCT-D-WH

4" LED COMMERCIAL RECESSED LIGHT




Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

Customer Name:

Project Name:

Note: Type:



7"(L) X 5 1/2" (D)

Features

- 4" Haze & White Finish TRIM
- MCT: The switch is on the light engine
- Mounting Options: Recessed

- 5-Year Warranty
- Lifespan: 50,000 hrs.

Technical Specifications

Electrical:

Voltage: 120-277VAC 50/60Hz

Wattage: 20WPower factor: >0.90Efficacy: 85 LPW

Mechanical:

- 4" Haze & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed to operate in temperatures 113°F
- IC-Rated
- Suitable for Damp Locations
- 5-Year Warranty

Lighting:

- MCT: The switch is on the light engine
- Dimming: 0~10V Dimmable
- Total lumens: 1720LM
- Color temperature: 3000K/4000K/5000K
- Color rendering index: >80
- Lifespan: 50,000 hrs.

Applications:

 Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

Other Models:

- 15W | 1275LM | CRLC4-15W-MCT-D
- 15W | 1275LM | CRLC4-15W-MCT-D-WH














Photometrics: CRLC4-20W-MCT-D





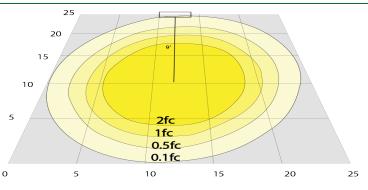

BUG Rating: B1-U1-G0

20W 5000K, Area 25" x 25' Mounting Height: 9'

Other Views:













CRLC-TRM-4

CRLC4-20W-MCT-D

White







CRLC-TRM-4-WH





CRLC4-20W-MCT-D-WH

Performance Table: CRLC4-20W-MCT-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLC4-20W-MCT-D	20W	120-277V	1720LM	3000K 4000K 5000K	B1-U1-G0	85
CRLC4-20W-MCT-D-WH						

Sample Ordering

Model	Watt	Dir	nming	Housing
CRLC4	- 20W	- MCT -	D -	•
				Blank WH = WHITE

Accessory:

Blank = No Option For Accessories

CRLC-468-RIBH-JB =CRLC Series Mounting Plate With Brackets And J- Box 4/6/8 in

Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-CRLC = EXTERNAL EMERGENCY BACK UP BATTERY

Accessory:




CRLC-468-RIBH-JB CRLC Series Mounting Plate With Brackets And J- Box 4/6/8 in

Factory-Installed Option:



OPT-EM-CRLC EXTERNAL EMERGENCY BACK UP BATTERY



18 3/16"(W) x 12"(H) x 1/5"(D)

