CRLC SERIES COMMERCIAL INDOOR LIGHTING



Type:

3 1/2"

6 1/2"(H) X 7 1/2" (W)

4 1/7"

CRLC6-15W-MCT-S-D CRLC6-15W-MCT-S-D-WH

6" LED COMMERCIAL SQUARE & WALL WASH RECESSED LIGHT



Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

eatures

- 6" Haze & White Finish TRIM
- MCT: The Switch is On The Light Engine
- Mounting Options: Recessed

5-Year Warranty

Lifespan: 50,000 hrs.

Customer Name:

Project Name:

Note:

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 15W
- Power Factor: >0.90
- Efficacy: 85 LPW

Mechanical:

- 6" Haze & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed to Operate In Temperatures 113°F
- Housing Not Required. Two Spring Clips To Hold The Fixture In Place
- **IC-Rated**
- Suitable for Damp Locations
- 5-Year Warranty

Other Models:

- 20W | 1720LM | CRLC6-20W-MCT-SA-D
- 20W | 1720LM | CRLC6-20W-MCT-SA-D-WH


Lighting:

- MCT: The Switch is On The Light Engine
- Dimming: 0~10V Dimmable
- Total Lumens: 1275LM
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >80
- Lifespan: 50,000 hrs.

Applications:

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.



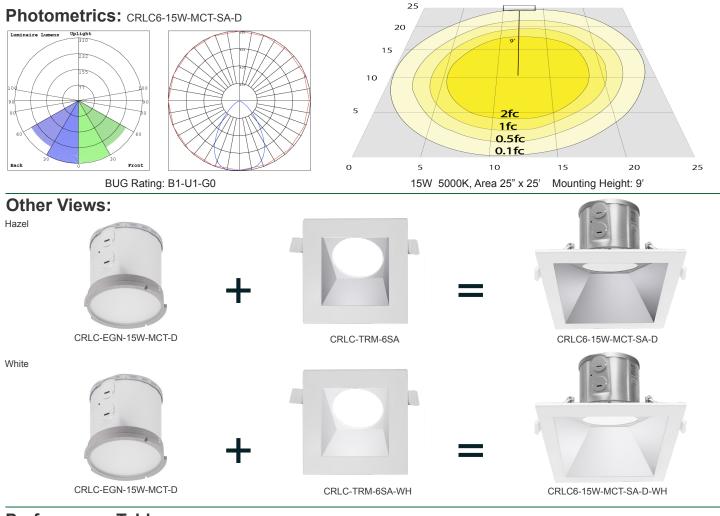

Performance Table: CRLC4-15W-MCT-SA-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLC6-15W-MCT-SA-D	15W	120-277V	1275LM	3000K 4000K 5000K	B1-U1-G0	85
CRLC6-15W-MCT-SA-D-WH						

Model Watt Shape Dimming Housing CRLC6 15W MCT SA D



Accessory:

Blank = No Option For Accessories

SSL-346-RIBH = 3",4",6" (ADJUSTABLE)SQUARE GALVANIZED PLATE WITH BAR HANGERS

Factory-Installed Option:

Blank = No Option For Accessories OPT-EM-HB1EXT = EXTERNAL EMERGENCY BACK UP BATTERY



Accessory:



Factory-Installed Option:



OPT-EM-HB1EXT EXTERNAL EMERGENCY BACK UP BATTERY

Phone: (877) 805-2252 | Fax:



