CRLC SERIES COMMERCIAL INDOOR LIGHTING



Type:

CRLC6-20W-MCT-A-D CRLC6-20W-MCT-A-D-WH

6" LED COMMERCIAL RECESSED LIGHT








Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

Customer Name:

Project Name:

Note:



2 3/4"(H) X 4 1/4"(W) X 6 1/3" (D)

-eatures

- 6" Haze & White Finish TRIM
- MCT: The switch is on the light engine
- Mounting Options: Recessed

- 5-Year Warranty
- Lifespan: 50,000 hrs.

Technical Specifications

Electrical:

Voltage: 120-277VAC 50/60Hz

Wattage: 20W Power factor: >0.90 Efficacy: 85 LPW

Mechanical:

- 4" Haze & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed to operate in temperatures 113°F
- No IC-Rated
- Suitable for Damp Locations
- 5-Year Warranty

Lighting:

- MCT: The switch is on the light engine
- Dimming: 0~10V Dimmable
- Total lumens: 1720LM
- Color temperature: 3000K/4000K/5000K
- Color rendering index: >80
- Lifespan: 50,000 hrs.

Applications:

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

Other Models:

- 15W | 1275LM | CRLC6-15W-MCT-A-D
- 15W | 1275LM | CRLC6-15W-MCT-A-D-WH














Photometrics: CRLC6-20W-MCT-A-D





BUG Rating: B1-U1-G0

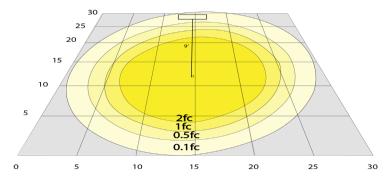

20W 5000K, Area 30" x 30" Mounting Height: 9'

Other Views:





CRLC-EGN-20W-MCT-D





CRLC-TRM-6A



CRLC6-20W-MCT-A-D

White



CRLC-EGN-20W-MCT-D



CRLC-TRM-6A-WH



CRLC6-20W-MCT-A-D-WH

Performance Table: CRLC6-20W-MCT-A-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLC6-20W-MCT-A-D	20W	120-277V	1720LM	3000K 4000K 5000K	B1-U1-G0	85
CRLC6-20W-MCT-A-D-WH						

Sample Ordering

Watt Color Temp. Model Dimming CRLC6 | = |20W | = |MCT | =

> Blank WH = WHITE

Housing

Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-HB1EXT = EXTERNAL EMERGENCY BACK UP BATTERY

Example:

1. CRLC6-20W-MCT-A-D

(FOR 20W CRLC6 MCT 120-277V)

1. CRLC6-20W-MCT-A-D OPT-EM-HB1EXT

(FOR 20W CRLC6 MCT 120-277V) (EXTERNAL EMERGENCY BACK UP BATTERY)





Factory-Installed Option:

OPT-EM-HB1EXT

EXTERNAL EMERGENCY

BACK UP BATTERY

