

# CRLC SERIES COMMERCIAL INDOOR LIGHTING

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

CRLC6-20W-MCT-S-D  
CRLC6-20W-MCT-S-D-WH  
6" LED COMMERCIAL SQUARE & OPEN RECESSED LIGHT




Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_ Type: \_\_\_\_\_

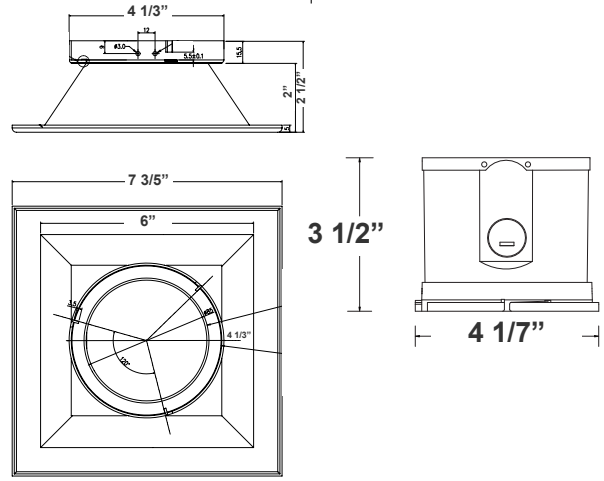

6"(H) X 4 1/7" (W)

## Features

- 6" Haze & White Finish TRIM
- MCT: The Switch Is On The Light Engine
- Mounting Options: Recessed
- 5-Year Warranty
- Lifespan: 50,000 hrs.

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 20W
- Power Factor: >0.90
- Efficacy: 85 LPW

### Mechanical:

- 6" Haze & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed To Operate In Temperatures 113°F
- Housing Not Required. Two Spring Clips To Hold The Fixture In Place
- IC-Rated
- Suitable for Damp Locations
- 5-Year Warranty

### Lighting:

- MCT: The Switch Is On The Light Engine
- Dimming: 0~10V Dimmable
- Total lumens: 1720LM
- Color temperature: 3000K/4000K/5000K
- Color rendering index: >80
- Lifespan: 50,000 hrs.

### Applications:

- Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

### Other Models:

- 15W | 1275LM | CRLC6-15W-MCT-S-D
- 15W | 1275LM | CRLC6-15W-MCT-S-D-WH






Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com



WG-Z7-2D-2Z

## Photometrics: CRLC6-20W-MCT-S-D

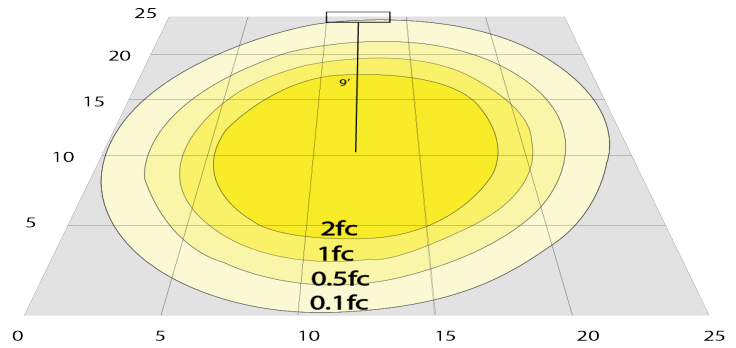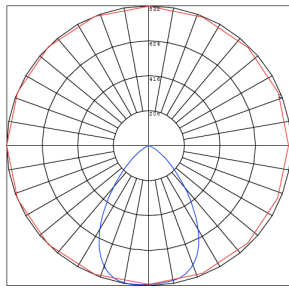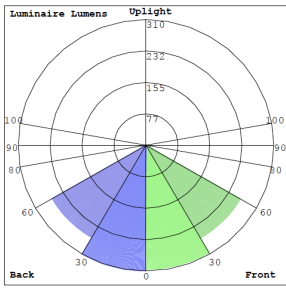

BUG Rating: B1-U1-G0


20W 5000K, Area 25" x 25" Mounting Height: 9'

## Other Views:

Hazel



CRLC-EGN-20W-MCT-D

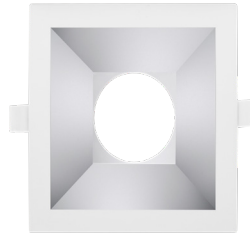

CRLC-TRM-6S




CRLC6-20W-MCT-S-D

White



CRLC-EGN-20W-MCT-D

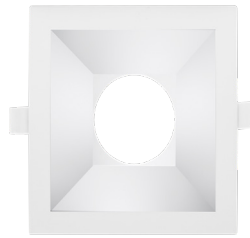

CRLC-TRM-6S-WH



CRLC6-20W-MCT-S-D-WH

## Performance Table: CRLC6-20W-MCT-S-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLC6-20W-MCT-S-D	20W	120-277V	1720LM	3000K	B1-U1-G0	85
CRLC6-20W-MCT-S-D-WH				4000K		
				5000K		

## Sample Ordering

Model Watt Shape Dimming Housing

CRLC6 - 20W - MCT - S - D -

Blank  
WH = WHITE


### Accessory:

Blank = No Option For Accessories  
SSL-346-RIBH = 3",4",6" (ADJUSTABLE)SQUARE GALVANIZED PLATE WITH BAR HANGERS

### Factory-Installed Option:

Blank = No Option For Accessories  
OPT-EM-HB1EXT = EXTERNAL EMERGENCY BACK UP BATTERY

### Accessory:



SSL-346-RIBH

### Factory-Installed Option:



OPT-EM-HB1EXT  
EXTERNAL EMERGENCY  
BACK UP BATTERY

