


# CRLC SERIES COMMERCIAL INDOOR LIGHTING

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

CRLC6-20W-MCTP-A-D  
CRLC6-20W-MCTP-A-D-WH  
6" LED COMMERCIAL RECESSED LIGHT

Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

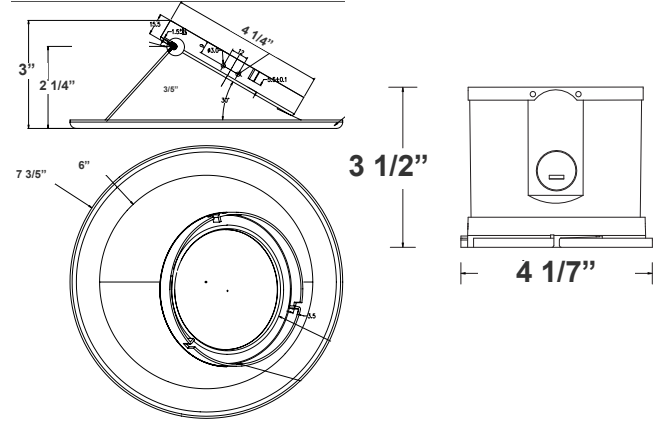

2 3/4" (H) X 4 1/4" (W) X 6 1/3" (D)

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

## Features

- 6" Haze & White Finish TRIM
- MCTP: Multi Color Temperature & Multi Power/Wattage (Selectable)
- Mounting Options: Recessed
- 5-Year Warranty
- Lifespan: 50,000 hrs.

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 10W/15W/20W
- Power Factor: >0.90
- Efficacy: 86 LPW

### Mechanical:

- 4" Haze & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed To Operate In Temperatures 113°F
- No IC-Rated
- Housing Not Required. Two Spring Clips To Hold The Fixture In Place
- Suitable for Damp Locations
- 5-Year Warranty

### Lighting:

- MCTP: Multi Color Temperature & Multi Power/Wattage (Selectable)
- Dimming: 0~10V Dimmable
- Total Lumens: 1720LM
- Color Temperature: 3000K/3500K/4000K
- Color Rendering index: >80
- Lifespan: 50,000 hrs.

### Applications:

- Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

### Other Models:

- 20W | 1720LM | CRLC6-20W-MCTP-A-D
- 20W | 1720LM | CRLC6-20W-MCTP-A-D-WH




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-Z7-2D-22

# Photometrics: CRLC6-20W-MCTP-A-D

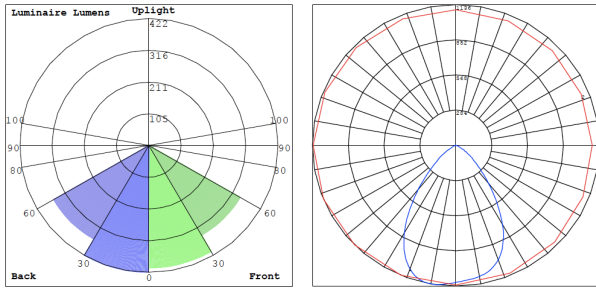

BUG Rating: B1-U1-G0

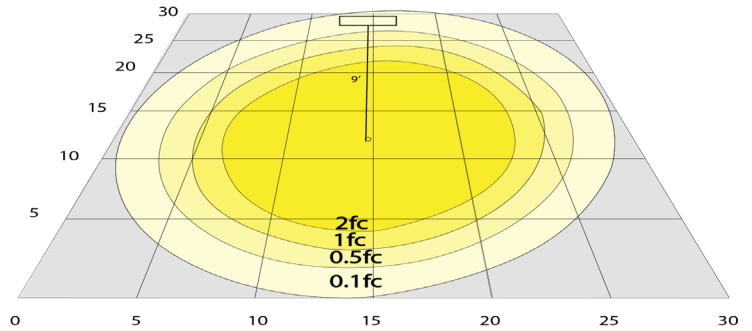

20W 5000K, Area 30" x 30" Mounting Height: 9'

## Other Views:

Hazel



CRLC-EGN-20W-MCTP-D



CRLC-TRM-6A



CRLC6-20W-MCTP-A-D

White



CRLC-EGN-20W-MCTP-D



CRLC-TRM-6A-WH



CRLC6-20W-MCTP-A-D-WH

## Performance Table: CRLC6-20W-MCT-A-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLC6-20W-MCTP-A-D	10W	120-277V	860LM	3000K	B1-U1-G0	86
	15W		1290LM	3500K		
CRLC6-20W-MCTP-A-D-WH	20W		1720LM	4000K		

## Sample Ordering

Model    Watt    Color Temp.    Dimming    Housing

CRLC6 - 20W - MCTP - A - D -

### Accessory:

Blank = No Option For Accessories  
 RSL6-RI = 6" ROUND ROUGH-IN PLATE, 26" LONG  
 RSL6-RI-13 = 6" ROUND ROUGH-IN PLATE, 13" LONG

### Factory-Installed Option:

Blank = No Option For Accessories  
 OPT-EM-HB1EXT = EXTERNAL EMERGENCY BACK UP BATTERY


### Example:

- 1. CRLC6-20W-MCTP-A-D (FOR 20W CRLC6 MCTP 120-277V)
- 1. CRLC6-20W-MCTP-A-D (FOR 20W CRLC6 MCTP 120-277V)  
 OPT-EM-HB1EXT (EXTERNAL EMERGENCY BACK UP BATTERY)

### Accessory:



RSL6-RI  
6" ROUND ROUGH-IN PLATE, 26" LONG

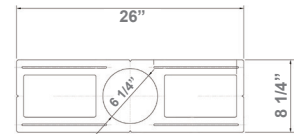

RSL6-RI  
26"(W) x 8 1/4"(H)



RSL6-RI-13  
6" ROUND ROUGH-IN PLATE, 13" LONG



RSL6-RI-13  
13 1/4"(W) x 9"(H)

### Factory-Installed Option:



OPT-EM-HB1EXT  
EXTERNAL EMERGENCY BACK UP BATTERY

