CRLC SERIES COMMERCIAL INDOOR LIGHTING



Type:

5"


CRLC6-40W-MCTP-A-D CRLC6-40W-MCTP-A-D-WH

6" LED COMMERCIAL RECESSED LIGHT






Selection:



Customer Name:

Project Name:

Note:



8"(H) X 4 1/4"(W) X 7 3/5" (D)

Ideal for hotel, offices, retail outlets, restaurant, parking garages,

-eatures

- 6" Haze & White Finish TRIM
- MCT:P The switch is on the light engine

conference room, education facilities and more.

Mounting Options: Recessed

- 5-Year Warranty
- Lifespan: 50,000 hrs.

Technical Specifications

Electrical:

Voltage: 120-277VAC 50/60Hz Wattage: 27W/34W/40W

Power factor: >0.90

Efficacy: 80 LPW

Mechanical:

- 4" Haze & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed to operate in temperatures 113°F
- No IC-Rated
- Suitable for Damp Locations
- 5-Year Warranty

Lighting:

- MCTP: The switch is on the light engine
- Dimming: 0~10V Dimmable
- Total lumens: 3200LM Max.
- Color temperature:3000K/3500K/4000K
- Color rendering index: >80
- Lifespan: 50,000 hrs.

Applications:

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

Other Models:

- 40W | 3200LM | CRLC6-40W-MCTP-A-D
- 40W | 3200LM | CRLC6-40W-MCTP-A-D-WH













Photometrics: CRLC6-40W-MCTP-A-D





BUG Rating: B1-U1-G0

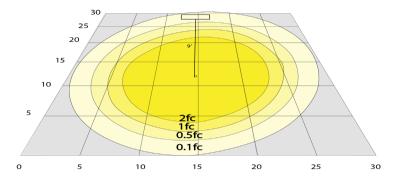

20W 5000K, Area 30" x 30" Mounting Height: 9'

Other Views:





CRLC-EGN-40W-MCTP-D





CRLC-TRM-6A



CRLC6-40W-MCTP-A-D

White



CRLC-EGN-40W-MCTP-D





CRLC-TRM-6A-WH



CRLC6-40W-MCTP-A-D-WH

Performance Table: CRLC6-40W-MCTP-A-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLC6-40W-MCTP-A-D	27W		2160LM	3000K		
	34W	120-277V	2720LM	3500K	B1-U1-G0	80
CRLC6-40W-MCTP-A-D-WH	40W		3200LM	4000K		

Sample Ordering

Model Watt Color Temp.

CRLC6 - 40W -MCTP

Dimming

Blank WH = WHITE

Housing

Factory-Installed Option:

Blank = No Option For Accessories OPT-EM-HB1EXT = EXTERNAL EMERGENCY BACK UP BATTERY

Example:

1. CRLC6-40W-MCTP-A-D

(FOR 40W CRLC6 MCTP 120-277V)

1. CRLC6-40W-MCTP-A-D OPT-EM-HB1EXT

(FOR 40W CRLC6 MCTP 120-277V) (EXTERNAL EMERGENCY BACK UP BATTERY)



Factory-Installed Option:

OPT-EM-HB1EXT

EXTERNAL EMERGENCY

BACK UP BATTERY

