

CRLC SERIES COMMERCIAL INDOOR LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

CRLC6-40W-MCTP-S-D
CRLC6-40W-MCTP-S-D-WH
6" LED COMMERCIAL SQUARE & OPEN RECESSED LIGHT




Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

Customer Name: _____

Project Name: _____

Note: _____ Type: _____

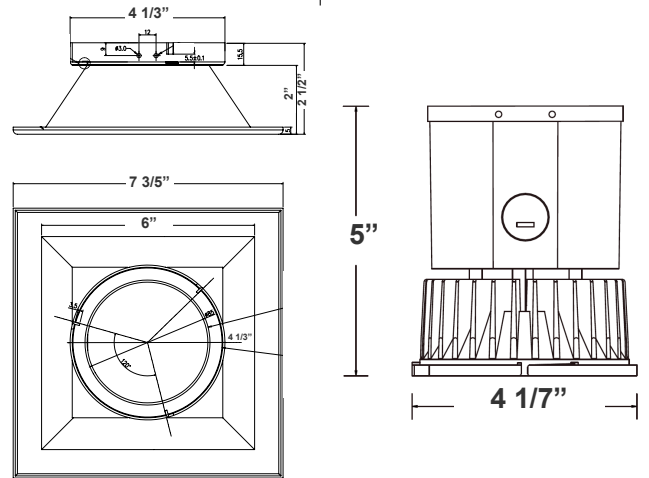

7 1/2"(H) X 4 1/7" (W) X 7 3/5"(D)

Features

- 6" Haze & White Finish TRIM
- MCTP: The Switch Is On The Light Engine
- Mounting Options: Recessed
- 5-Year Warranty
- Lifespan: 50,000 hrs.

Technical Specifications

Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 27W/34W/40W
- Power Factor: >0.90
- Efficacy: 80 LPW

Mechanical:

- 6" Haze & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed to Operate In Temperatures 113°F
- Housing Not Required. Two Spring Clips To Hold The Fixture In Place
- No IC-Rated
- Suitable for Damp Locations
- 5-Year Warranty

Lighting:

- MCTP: The Switch Is On The Light Engine
- Dimming: 0~10V Dimmable
- Total Lumens: 3200LM Max.
- Color Temperature: 3000K/3500K/4000K
- Color Rendering index: >80
- Lifespan: 50,000 hrs.

Applications:

- Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

Other Models:



- 40W | 3200LM | CRLC6-40W-MCTP-S-D
- 40W | 3200LM | CRLC6-40W-MCTP-S-D-WH




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



Photometrics: CRLC6-40W-MCTP-S-D

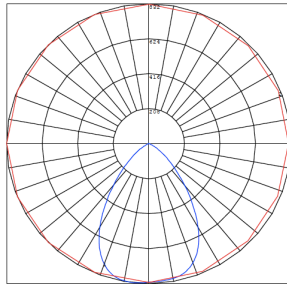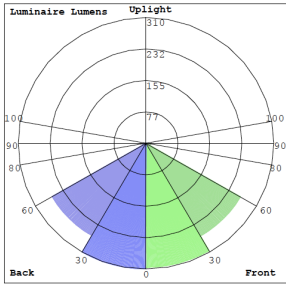

BUG Rating: B1-U1-G0

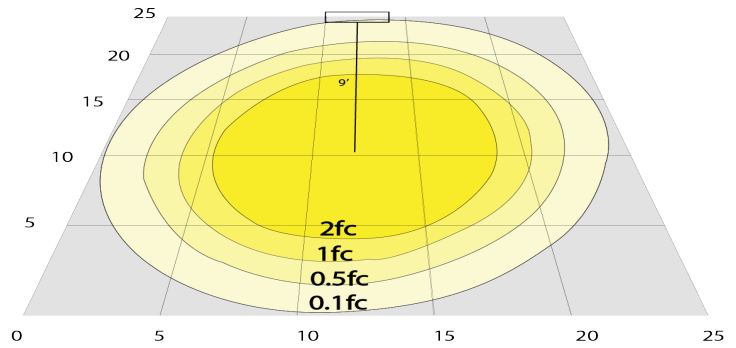


40W 5000K, Area 25" x 25" Mounting Height: 9'

Other Views:

Hazel



CRLC-EGN-40W-MCTP-D



CRLC-TRM-6S




CRLC6-40W-MCTP-S-D

White



CRLC-EGN-40W-MCTP-D



CRLC-TRM-6S-WH



CRLC6-40W-MCTP-S-D-WH

Performance Table: CRLC6-40W-MCTP-S-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLC6-40W-MCTP-SA-D	27W	120-277V	2160LM	3000K	B1-U1-G0	80
CRLC6-40W-MCTP-SA-D-WH	34W		2720LM	3500K		
	40W		3200LM	4000K		

Sample Ordering

Model Watt Color Temp. Shape Dimming Housing

CRLC6 - 20W - MCTP - S - D -

Blank
WH = WHITE


Accessory:

Blank = No Option For Accessories
SSL-346-RIBH = 3",4",6" (ADJUSTABLE)SQUARE GALVANIZED PLATE WITH BAR HANGERS

Factory-Installed Option:

Blank = No Option For Accessories
OPT-EM-HB1EXT = EXTERNAL EMERGENCY BACK UP BATTERY

Accessory:



SSL-346-RIBH

Factory-Installed Option:



OPT-EM-HB1EXT
EXTERNAL EMERGENCY
BACK UP BATTERY

