

# CRLE SERIES RESIDENTIAL LIGHTING

CRLE6-7-18W-MCTP-WH  
BUILDER SERIES COMMERCIAL RECESS LIGHT

**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

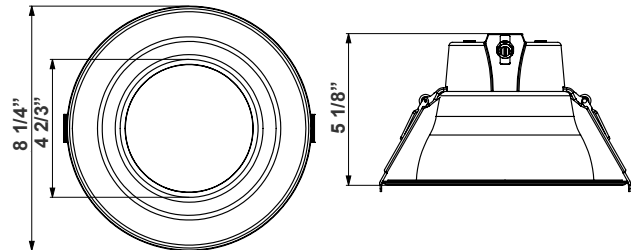

8 1/4"(W) x 5 1/8"(H)

LED DOWNLIGHTS (SMOOTH TRIM) - 6" ROUND Ideal for New As Well As Old Residential And Commercial Constructions.

## Features

- 6" Smooth Recessed Trim
- Multi CCT (Selectable Switch on the Back of the driver )
- Isolated Driver for Improved Thermal Management
- 5-Year Warranty
- Spun Aluminum with White Powder Coat Finish

## Technical Specifications

### Electrical:

- Voltage: 120V AC
- Output Voltage: 36VDC
- Power Factor: >0.90
- Wattage: 7W/10W/18W
- Efficacy: 100 LM/W
- Total Harmonic Distortion: ≤15 %

### Mechanical:

- 2FT Flex Whip With Push-in Connector
- 16" Earthquake Safety Cable Incl.
- Mounting Options: Recessed
- Temperature Rating: Designed To Operate in Temperatures 113°F
- No IC-Rated
- Suitable For Damp Locations
- 5-Year Warranty

### Lighting:

- MCTP: The Switch Is On The Light Engine
- Dimming: 0~10V Dimmable
- Total Lumens: 1800LM Max.
- Color Temperature: 3000K/3500K/4000K
- Color Rendering index: >80
- Beam Angle: 100°-110°
- Rated Life: 50,000 hrs

### Applications:

- LED recessed trims have been designed to be a flexible lighting solution for new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

### Other Models:

- 12W | 1200LM | CRLE4-5-12W-MCTP-WH




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-Z8-2F-2Z

## Photometrics: CRLE6-7-18W-MCTP-WH



BUG Rating: B1-U1-G0

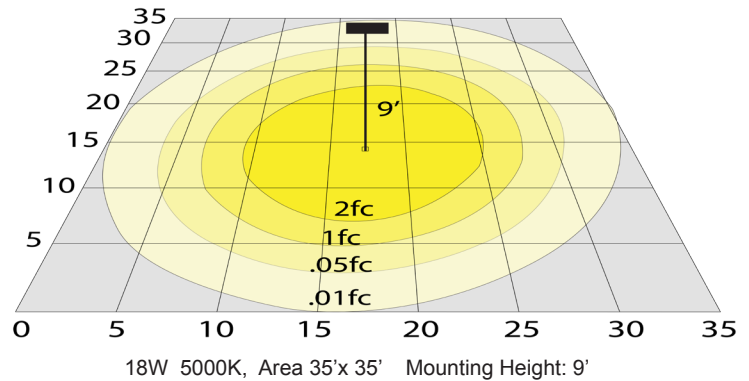

18W 5000K, Area 35'x 35' Mounting Height: 9'


## Other Views:



Side View



Front View

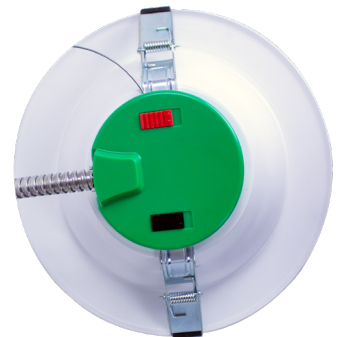

Back View

## Performance Table: CRLE6-7-18W-MCTP-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLE6-7-18W-MCTP-WH	7W 10W 18W	120V	700LM 1000LM 1800LM	3000K 3500K 4000K	B1-U1-G0	100

## Sample Ordering

Model		Watt		Watt		Color Temp.		Finish
CRLE6	-	7	-	18W	-	MCTP	-	WH

## Accessories:

Blank = No Option For Accessories

CRLE-RI-TBAR-UNV = SNAP-IN COMM. RECESSED LIGHT UNIVERSAL TBAR PLATE

CRLE-RI-UNV = SNAP-IN COMM. RECESSED LIGHT UNIVERSAL ROUGH-IN PLATE

CRLE6-TRM-BK = 6" BLACK CLIP-ON TRIM

CRLE6-TRM-BN = 6" BRUSHED NICKEL CLIP-ON TRIM

RSL6-RI-13 = 6" ROUND ROUGH-IN PLATE, 13" LONG

RSL6-RI = 6" ROUND ROUGH-IN PLATE, 26" LONG

## Factory-Installed Option:


Blank = No Option For Accessories

OPT-EM-CRLE = EMERGENCY BACK UP BATTERY


## ACCESSORIES:




CRLE-RI-TBAR-UNV



CRLE-RI-UNV



CRLE6-TRM-BK



RSL6-RI-13  
6" Round Rough-in Plate,  
13" Long



RSL6-RI  
6" Round Rough-in Plate,  
26" Long



CRLE6-TRM-BN


## FACTORY INSTALLED OPTION :



OPT-EM-CRLE




CRLE-RI-TBAR-UNV:

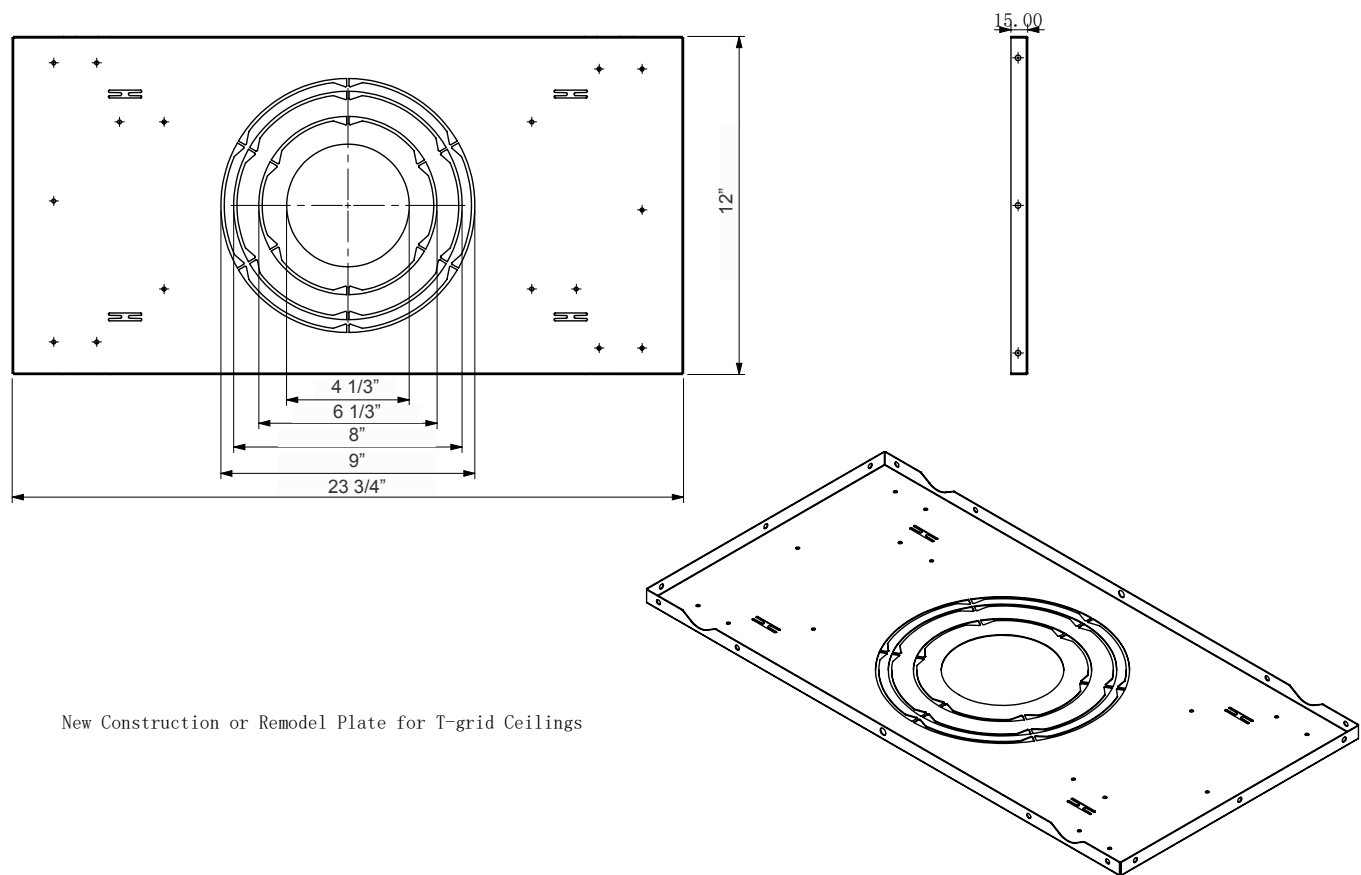

New Construction or Remodel Plate for T-grid Ceilings

CRLE-RI-UNV:

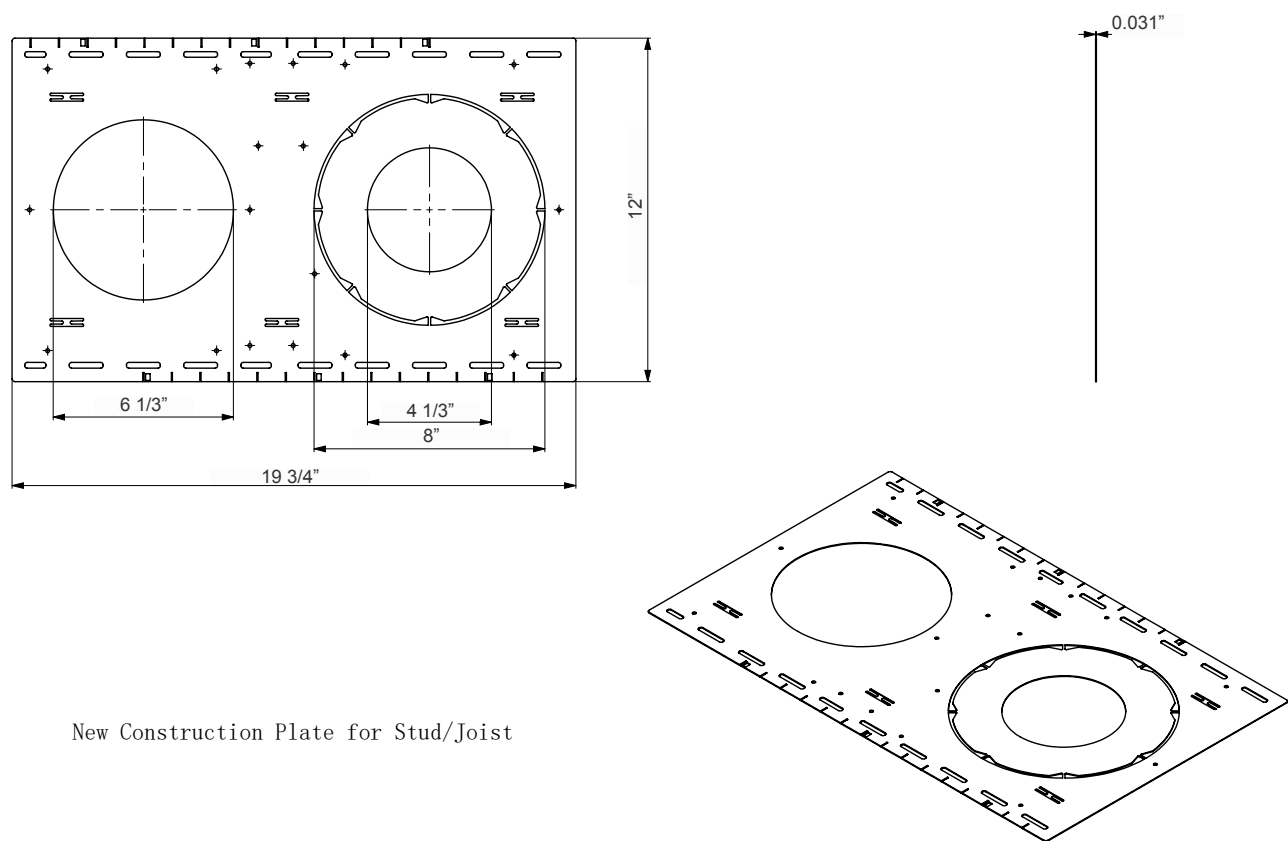

New Construction Plate for Stud/Joist

