CRLX SERIES COMMERCIAL INDOOR LIGHTING



11"

CRLX10-50-80W-MP

X GEN. LED COMMERCIAL RECESSED LIGHT



Customer Name: Project Name: Note: Type: 10" 10 8/9' 4 1/3"

11"

8 8/9"(H) X 11" (W)

Mounting Diameters: 10"- 10.7"

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

eatures

- 10" Haze Finish TRIM
- MCTP: The switch is on the light engine
- Mounting Options: Recessed

5-Year Warranty

Lifespan: 50,000 hrs.

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 50W/65W/80W
- Power factor: >0.90
- Efficacy: 85 LPW

Mechanical:

- 10" Haze Finish TRIM
- Mounting Options: Recessed •
- Temperature Rating: Designed to operate in temperatures 113°F
- No IC-Rated
- Suitable for Damp Locations
- 5-Year Warranty

Lighting:

- MCTP: The switch is on the light engine
- Dimming: 1~10V Dimmable
- Total lumens: 6800LM Max.
- Color temperature: 3000K/3500K/4000K •
- Color rendering index: >80
- Lifespan: 50,000 hrs.

Applications:

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

- Other Models:
- 40W | 3400LM | CRLX10-18-40W-MCTP-D








Technical Specifications

Other Views:



Performance Table: CRLX10-50-80W-MP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLX10-50-80W-MP	50W	120-277V	4250LM	3000K 3500K 4000K	B1-U1-G0	85
	65W		5525LM			
	80W		6800LM			

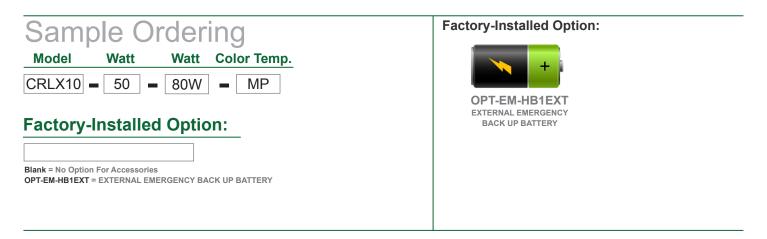

WESTGATE

