# CXES SERIES OUTDOOR LIGHTING



CXES-10-30W-MCTP

SQUARE NEW CONCEPT GARAGE AND CEILING LIGHTS

Multi Color Temperature & Multi Power/Wattage (Selectable)






Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting.

Customer Name:

Project Name:

Note: Type:



9 1/8"(L) X 9 1/8" (W) X 3 1/8"(H)

## **Features**

- Stamped Galvanized Steel With Prismatic Polycarbonate Lens Redesigned For LED
- Designed for 9 to 16 Foot Mounting Heights

- Factory-Installed Options: Battery Backup, Motion Sensor
- 7-year Warranty

## **Technical Specifications**

#### **Electrical:**

Wattage: 10W/20W/30W

Input Current: 0.6A MAX

Input Voltage: 120-277VAC 50/60Hz

Power Factor: >0.90LPW: 130LPW

#### Mechanical:

- Stamped Galvanized Steel
- Four 1/2" Threaded Hubs Located On Four Sides Of The Housing
- Prismatic Polycarbonate Lens
- Lifespan: 70000 Hrs
- Operating Temperature: -40°F ~ 104°F
- Suitable For Damp Locations
- 7-year Warranty

#### Lighting:

- MCTP:Multi-CCT and Power Switch Is In The Fixture
- Dimming: 0~10V dimmable
- LED Type/ Brand: LUMILEDS 2835LED
- Total Lumens: 3900LM Max.
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >70
- Beam Angle: 150°
- Lifespan: 70000 Hrs

### **Applications:**

- Indoor Parking
- Commercial Buildings
- School
- Warehouses
- Complexes
- Apartment
- Garage

#### Other Models:

60W | 7800LM | CXES-30-60W-MCTP

• 80W | 10400LM | CXES-40-80W-MCTP













### Photometrics: CXES-10-30W-MCTP

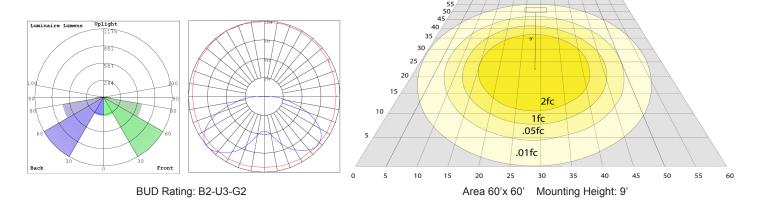

### **Other Views:**







Side View Front View Switch View

## Performance Table: CXES-10-30W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CXES-10-30W-MCTP	10W 20W 30W	120~277V	1300LM 2600LM 3900LM	3000K 4000K 5000K	B2-U3-G2	130

## Sample Ordering

Model	Min.	Max.Wattage Color Temp.					
CXES =	10	<b>–</b> 30W <b>–</b> MCTP					

