

DLSE SERIES Residential Lighting

DLSE4-MCT5-PIR

BUILDER SERIES LED ECONOMY DISK LIGHT WITH PIR MOTION SENSOR

MCT Multi Color Temperature (Selectable)


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

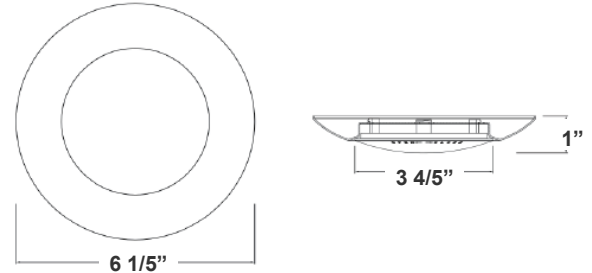

6 1/5" x 1"

Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.

Features

- Spun Steel, Powder-Coated
- Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- MCT: The Switch is On The LED Board Under The Lens
- White Translucent Acrylic Lens
- JA8-E-2016 & Title 24 Compliant (approved approved by the state of California and registered with the California Energy Commissions (CEC))

Technical Specifications

Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 10W
- Efficacy: 63 LPW

Mechanical:

- White Finish
- Spun Steel, Powder-Coated
- Suitable for use in Clothes Closet Spaces to comply with NEC Regulations 410.16(a)(3) and 410.16(c)(5)
- Fits on 4" Octagonal (4O) or 3" Octagonal (3O) Electrical Boxes
- Sensor Hold Time: 30s
- Sensor Mounting Height: 16.4FT maximum
- Sensor Detection Angle: 120°
- Maximum Ambient Temperature: 104°F
- Suitable for Damp Location
- 5-Year Warranty

Lighting:

- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Lens: White Translucent Acrylic
- MCT: The Switch is On The LED Board Under The Lens
- LED: Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- Total Lumens: 630LM
- Color Temperatures: 2700/3000/3500/4000/5000K
- Color Rendering Index: CRI ≥ 90
- Rated life: 50,000 hrs

Applications:

- Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-Z7-26-22

Photometrics: DLSE4-MCT5-PIR



BUG Rating: B0-U1-G0

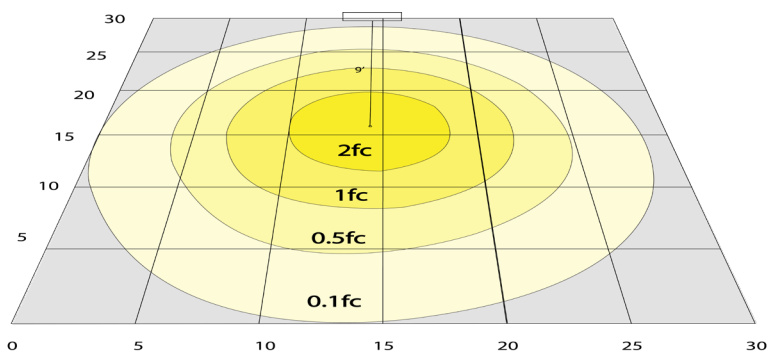

9W 5000K, Area 30'x 30' Mounting Height: 9'

Performance Table: DLSE4-MCT5-PIR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
DLSE4-MCT5-PIR	10W	120V	630LM	2700K 3000K 3500K 4000K 5000K	B0-U1-G0	63

Sample Ordering



Model	Color Temp.	Sensor
DLSE4	MCT5	PIR

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-DLS4 = EMERGENCY OPTION - MOUNT IN EXTENDED BASE

SENSOR DIAGRAMS:



FACTORY-INSTALLED OPTION:



OPT-EM-DLS4

