

# DLSE SERIES Residential Lighting

DLSE6-30K  
DLSE6-40K  
DLSE6-50K



Selection:





Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_



7 1/2" x 1 1/5"

## Features

- Spun Steel, Powder-Coated
- Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- White Translucent Acrylic Lens
- 5-Year Warranty

## Technical Specifications

### Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 15W
- Efficacy: 70LPW

### Mechanical:

- White Finish
- Spun Steel, Powder-Coated
- Fits on 4" Octagonal (4O) or 3" Octagonal (3O) Electrical Boxes
- Maximum Ambient Temperature: 104°F
- 5-Year Warranty
- Suitable for Wet Location

### Lighting:



- Lens: White Translucent Acrylic
- LED: Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 1050LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 90
- Rated life: 50,000 hrs

### Applications:


- Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications



## Photometrics: DLSE6

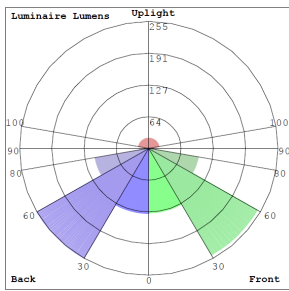

BUG Rating: B1-U2-G1

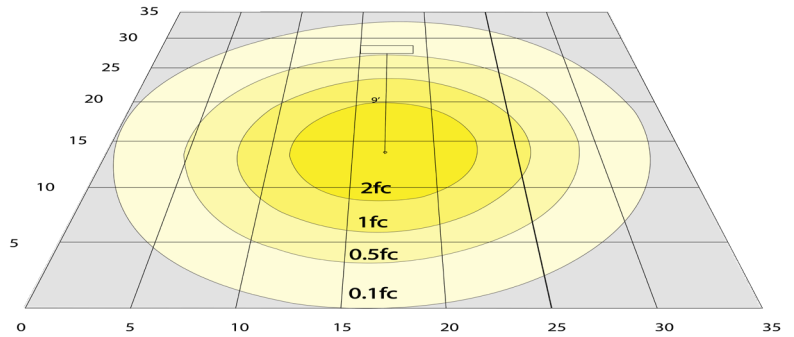


Simulation Based on 4000K Area 35'x 35' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table: DLSE6

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
DLSE6-30K	15W	120V	1000LM	3000K	B1-U2-G1	67
DLSE6-40K	15W	120V	1000LM	4000K	B1-U2-G1	67
DLSE6-50K	15W	120V	1000LM	5000K	B1-U2-G1	67

## Sample Ordering

Model Color Temp.

DLSE6 -   
 3000K  
 4000K  
 5000K

## Factory-Installed Options:

Blank = No Option For Accessories  
 OPT-EM-DLS6 = MOUNT IN EXTENDED BASE

## Example:

- DLSE6-30K (FOR DLSE6 15W 3000K FIXTURE 120V)
- DLSE6-30K (FOR DLSE6 15W 3000K FIXTURE 120V)  
 OPT-EM-DLS6 (MOUNT IN EXTENDED BASE)

## FACTORY-INSTALLED OPTION:



OPT-EM-DLS6

