

# DLSE SERIES Residential Lighting

## DLSE6-RGBW

WG SMART APP COMPATIBLE RGBW BUILDER SERIES LED ECONOMY DISK LIGHT

**MCTE** Multi Color Temperature (Selectable)


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_


Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

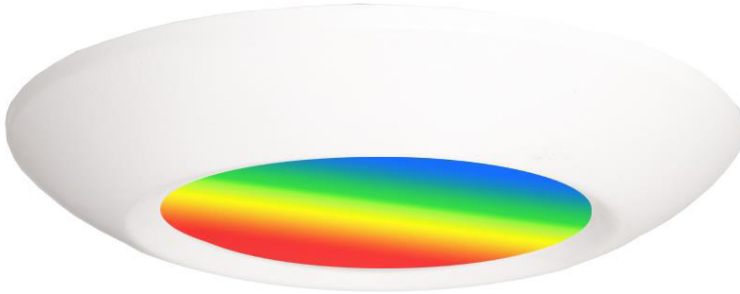

Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.

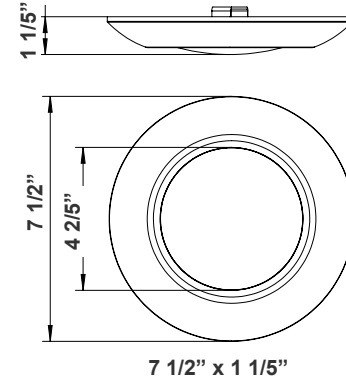

## Features

- Spun Steel, Powder-Coated
- 5-Year Warranty
- White Translucent Acrylic Lens
- Rated life: 50,000 hrs

## Technical Specifications

### Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 15W
- Efficacy: 67 LPW
- Fixture Operating Voltage: 36VDC
- Rated Input Current (mA): 337/ 253/ 168mA
- Total Harmonic Distortion: ≤ 20 %
- Bluetooth Connection Range: Approximately 30 feet (10 meters). Maximum Communication Range Will Vary Depending On Obstacles (Person, Metal, Wall, etc.) Or Electromagnetic Environment

### Mechanical:

- White Finish
- Spun Steel, Powder-Coated
- Suitable for use in Clothes Closet Spaces to comply with NEC Regulations 410.16(a)(3) and 410.16(c)(5)
- Fits on 4" Octagonal (4O) or 3" Octagonal (3O) Electrical Boxes
- Maximum Ambient Temperature: 104°F
- Suitable for Damp Location
- 5-Year Warranty

### Lighting:

- Lens: White Translucent Acrylic
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 1000LM
- Color Temperatures: 2700/3000/3500/4000/5000K
- Color Rendering Index: CRI ≥ 90
- Rated life: 50,000 hrs

### Applications:

- Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatetmfg.com |




WG-07092025

## Photometrics: DLSE6-RGBW

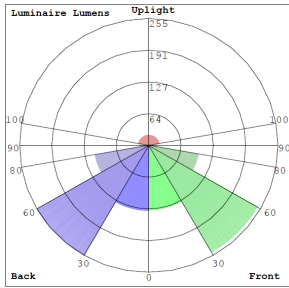

BUG Rating: B1-U2-G1

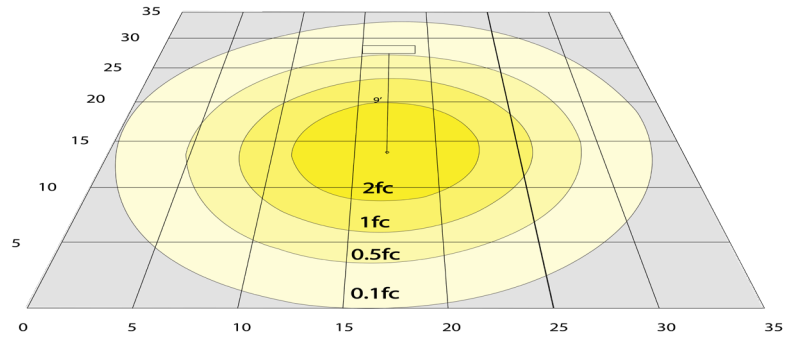


15W 5000K, Area 35'x 35' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table: DLSE6-RGBW

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
DLSE6-RGBW	15W	120V	1000LM	RGBW	B1-U2-G1	67

## Sample Ordering

Model Color Temp.

DLSE6 - RGBW

## Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-DLS6 = EMERGENCY OPTION - MOUNT IN EXTENDED BASE

## FACTORY-INSTALLED OPTION:



OPT-EM-DLS6



- For Setting Up The Light(s), Initial Internet Connection or Mobile Data Is Required.
- After the Initial Setup, Internet Connection is not Necessary Anymore. The lights Can Be Controlled with The Mobile App on The Phone or Tablet. Features Such as Dimming, Changing Colors, Lights Scenes, etc.
- Scheduling Feature Requires Internet Connection.
- Bluetooth Devices Need a Gateway (Sold Separately) In Order to Connect to WiFi Network (Internet)

**WESTGATE**

