

# DLSN SERIES

Residential Lighting

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

DLSN6-27K  
DLSN6-30K  
DLSN6-41K  
DLSN6-50K

Customer Name: \_\_\_\_\_


Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_



Selection:

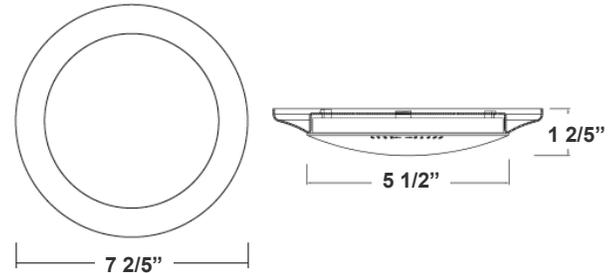

7 2/5" x 1 2/5"

Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.

## Features

- Spun Steel, Powder-Coated
- Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- White Translucent Acrylic Lens
- JA8-E-2016 & Title 24 Compliant (approved approved by the state of California and registered with the California Energy Commissions (CEC))

## Technical Specifications

### Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 15W
- Efficacy: 63-66 LPW

### Mechanical:

- White Finish
- Spun Steel, Powder-Coated
- Fits on 4" Octagonal (4O) or 3" Octagonal (3O) Electrical Boxes (Adaptor Plate included)
- Maximum Ambient Temperature: 104°F
- Closed Cell Neoprene Foam Gasket
- Suitable for Damp Location with gasket
- Surface Mounting Bracket Included
- Rated life: 50,000 hrs

### Lighting:

- Lens: White Translucent Acrylic
- LED: Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 950-1000LM
- Color Temperatures: 2700K/3000K/4100K/5000K
- Color Rendering Index: CRI ≥ 80
- 5-Year Warranty

### Applications:

- Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

### Other Models:

- 15W | 550LM | DLSN4-27K
- 15W | 560LM | DLSN4-30K
- 15W | 580LM | DLSN4-41K
- 15W | 600LM | DLSN4-50K





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com | www.westgatecontrols.co




WG-Z7-26-2Z

## Photometrics: DLSN6



BUG Rating: B1-U1-G1

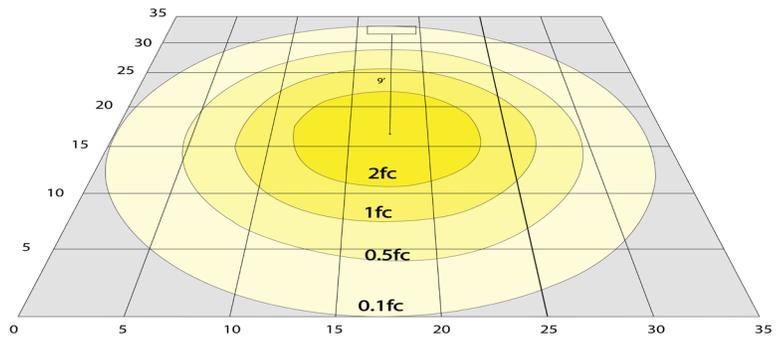

Simulation Based on 2700K Area 30'x30' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table: DLSN6

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
DLSN6-27K	15W	120V	950LM	2700K	B1-U1-G1	63
DLSN6-30K	15W	120V	960LM	3000K	B1-U1-G1	64
DLSN6-41K	15W	120V	980LM	4100K	B1-U1-G1	65
DLSN6-50K	15W	120V	1000LM	5000K	B1-U1-G1	66

## Sample Ordering

Model	Color Temp.
DLSN6	2700K
	3000K
	4000K
	5000K
	BR = Bronze
	BN = Brushed Nickel

## Accessories:

Blank = No Option For Accessories  
DLSN6-RMK= RECESSED MOUNTING KIT


## Factory-Installed Options:

Blank = No Option For Accessories  
OPT-EM-DLS6 = MOUNT IN EXTENDED BASE

## Example:

- DLSN6-30K (FOR DLSN6 15W 3000K FIXTURE 120V)
- DLSN6-30K OPT-EM-DLS6 (FOR DLSN6 15W 3000K FIXTURE 120V) (MOUNT IN EXTENDED BASE)

## ACCESSORIES & FACTORY-INSTALLED OPTIONS:

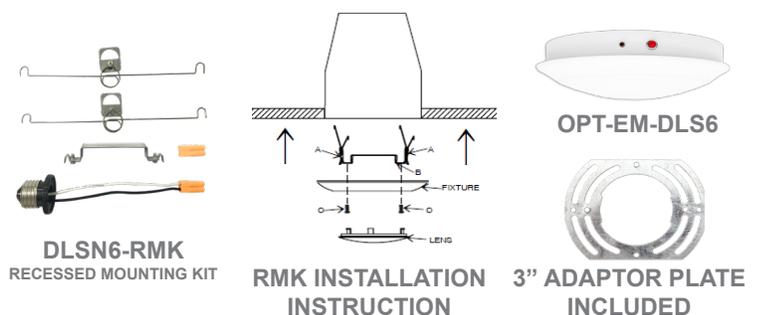

## OTHER MODELS:

