

DLSN SERIES Residential Lighting

DLSN4-27K
DLSN4-30K
DLSN4-41K
DLSN4-50K

Customer Name: _____



Project Name: _____

Note: _____

Type: _____



Selection:



6 1/5" x 1"

Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.

Features

- Spun Steel, Powder-Coated
- Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- White Translucent Acrylic Lens
- JA8-E-2016 & Title 24 Compliant (approved approved by the state of California and registered with the California Energy Commissions (CEC))

Technical Specifications

Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 10W
- Efficacy: 55-60 LPW

Mechanical:

- White Finish
- Spun Steel, Powder-Coated
- Fits on 4"Octagonal (4O) or 3"Octagonal (3O) Electrical Boxes (Adaptor Plate included)
- Maximum Ambient Temperature: 104°F
- Closed Cell Neoprene Foam Gasket
- Suitable for Damp Location with gasket
- Surface Mounting Bracket Included
- Rated life: 50,000 hrs

Lighting:

- Lens: White Translucent Acrylic
- LED: Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 550-600LM
- Color Temperatures: 2700K/3000K/4100K/5000K
- Color Rendering Index: CRI ≥ 80
- 5-Year Warranty

Applications:



- Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

Other Models:


- 15W | 950LM | DLSN6-27K
- 15W | 960LM | DLSN6-30K
- 15W | 980LM | DLSN6-41K
- 15W | 1000LM | DLSN6-50K



Photometrics: DLSN4



BUG Rating: B0-U1-G0

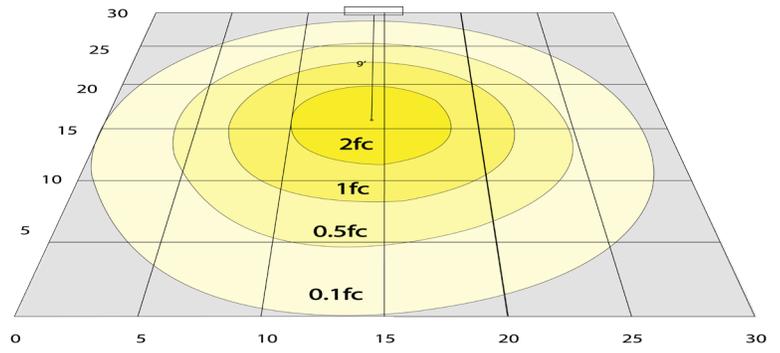

Simulation Based on 2700K Area 30'x30' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: DLSN4

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
DLSN4-27K	10W	120V	550LM	2700K	B0-U1-G0	55
DLSN4-30K	10W	120V	560LM	3000K	B0-U1-G0	56
DLSN4-41K	10W	120V	580LM	4100K	B0-U1-G0	58
DLSN4-50K	10W	120V	600LM	5000K	B0-U1-G0	60

Sample Ordering

Model Color Temp.

DLSN4 -
 2700K
 3000K
 4000K
 5000K

Factory-Installed Option:

Blank = No Option For Accessories
 OPT-EM-DLS6 = MOUNT IN EXTENDED BASE

Example:

- DLSN4-30K (FOR DSLN4 15W 3000K FIXTURE 120V)
- DLSN4-30K OPT-EM-DLS6 (FOR DSLN4 15W 3000K FIXTURE 120V) (MOUNT IN EXTENDED BASE)

FACTORY-INSTALLED OPTION:



OPT-EM-DLS6
 MOUNT IN EXTENDED BASE

