


# DLST SERIES Residential Lighting

DLST6-MCT5-IP65  
MCT5 Multi Color Temperature (Selectable)

Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

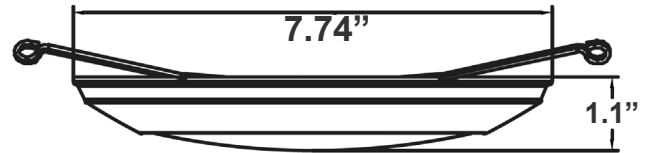

Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.

7.74"(D) x 1.1"(W)

## Features

- Spun Steel, Powder-Coated
- Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- MCT: The Switch is On The LED Board Under The Lens
- White Translucent Acrylic Lens

## Technical Specifications

### Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 10W
- Efficacy: 100 LPW

### Mechanical:

- White Finish
- Polycarbonate Housing
- Fits on 4" Octagonal (4O) or 3" Octagonal (3O) Electrical Boxes
- Recessed Mounting Springs & Kit included
- Maximum Ambient Temperature: -4°F to 104°F
- IP65, Suitable for wet location
- 5-Year Warranty

### Lighting:



- Lens: White Translucent Acrylic
- MCT: The Switch is On The LED Board Under The Lens
- LED: Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 1000LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Rated life: 50,000 hrs
- Beam Angle: 120°

### Applications:


- Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications



## Photometrics: DLST 6-MCT5



BUG Rating: B0-U1-G0

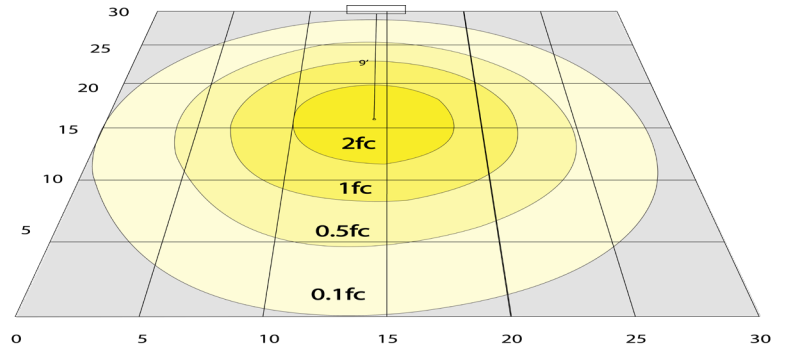

5000K, Area 30'x 30' Mounting Height: 9'

## Other Views:



Side View



Back View

## Performance Table: DLST6-MCT5

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
DLST6-MCT5	10W	120V	1000LM	2700K 3000K 3500K 4000K 5000K	B0-U1-G0	100

## Sample Ordering

Model Color Temp.

DLST6 - MCT5

## Factory-Installed Options:

Blank = No Option For Accessories  
 OPT-EM-DLS6 = EMERGENCY OPTION - MOUNT IN EXTENDED BASE  
 OPT-PC-DLS6 = PHOTOCELL

## FACTORY-INSTALLED OPTION:



OPT-EM-DLS6

