

DLST SERIES Residential Lighting

DLST6-MCT5-PIR
6" ECONOMY EASY-INSTALL DISK WITH PIR MOTION SENSOR
CATALOG NO.

MCT Multi Color Temperature (Selectable)



Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____



7.74"(D) x 1.1"(W)

Features

- Spun Steel, Powder-Coated
- Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- MCT: The Switch is On The LED Board Under The Lens
- White Translucent Acrylic Lens

Technical Specifications

Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 10W
- Efficacy: 100 LPW

Mechanical:

- White Finish
- Polycarbonate Housing
- Pre-Installed PIR Motion Sensor:
- Sensor Hold Time: 30s
- Sensor Mounting Height: 16.4FT maximum
- Sensor Detection Angle: 120°
- Fits on 4" Octagonal (4O) or 3" Octagonal (3O) Electrical Boxes
- Recessed Mounting Springs & Kit included
- Maximum Ambient Temperature: -4°F to 104°F
- Suitable for Damp Location
- 5-Year Warranty

Lighting:

- Lens: White Translucent Acrylic
- MCT: The Switch is On The LED Board Under The Lens
- LED: Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 1000LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Rated life: 50,000 hrs
- Beam Angle: 120°

Applications:

- Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-09292024

Photometrics: DLST 6-MCT5-PIR



BUG Rating: B0-U1-G0

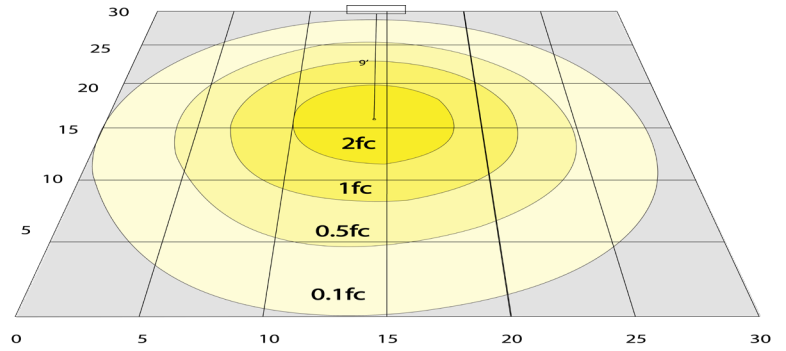


5000K, Area 30'x 30' Mounting Height: 9'

Other Views:



Side View

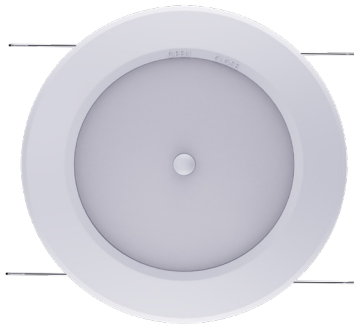

Front View



Back View

Performance Table: DLST6-MCT5-PIR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
DLST6-MCT5-PIR	10W	120V	1000LM	2700K 3000K 3500K 4000K 5000K	B0-U1-G0	100

Sample Ordering

- -

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-DLS6 = EMERGENCY OPTION - MOUNT IN EXTENDED BASE

FACTORY-INSTALLED OPTION:



OPT-EM-DLS6

