


DLSU SERIES Residential Lighting


DLSU6-MCT5
6" ECO METAL DISK LIGHT - 120V

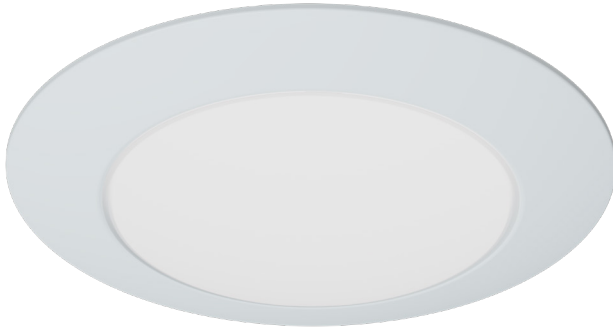

Customer Name: _____

Project Name: _____

Note: _____ Type: _____

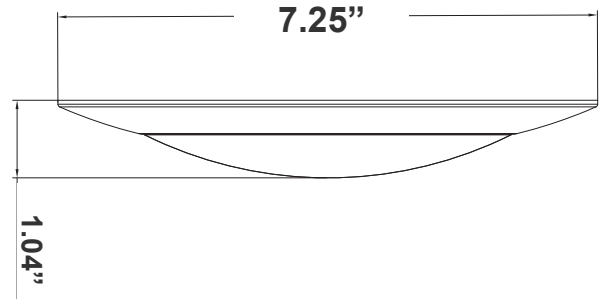

7.25"(D) x 1.04"(W)

Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.

Features

- Spun Steel, Powder-Coated
- Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- White Translucent Acrylic Lens

Technical Specifications

Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 14.8W
- Efficacy: 67 LPW

Mechanical:

- White Finish
- Metal Housing
- Fits on 4" Octagonal (4O) or 3" Octagonal (3O) Electrical Boxes
- Maximum Ambient Temperature: -4°F to 104°F
- Suitable for Damp Location
- 5-Year Warranty

Lighting:



- Lens: White Translucent Acrylic
- MCT: The Switch is On The LED Board Under The Lens
- LED: Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 1000LM
- Color Temperatures: 3000K
- Color Rendering Index: CRI ≥ 80
- Rated life: 50,000 hrs
- Beam Angle: 120°

Applications:


- Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications



Photometrics: DLSU6-MCT5




BUG Rating: B0-U1-G0

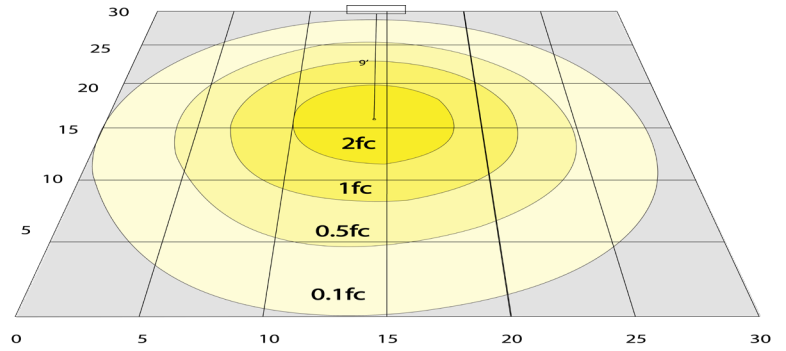


5000K, Area 30'x 30' Mounting Height: 9'

Other Views:



Side View



Front View

Performance Table: DLSU6-MCT5

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
DLSU6-MCT5	14.8W	120V	1000LM	3000K	B0-U1-G0	67

Sample Ordering

Model Color Temp.

DLSU6 = MCT5

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-DLS6 = EMERGENCY OPTION - MOUNT IN EXTENDED BASE
 OPT-PC-DLS6 = PHOTOCELL

FACTORY-INSTALLED OPTION:



OPT-EM-DLS6

