DLW SERIES Outdoor Lighting


LED SMALL NON-CUTOFF WALL PACK WITH PHOTOCELL DLW-15W-MCT-WH




LED Non-Cutoff Wall Pack with Photocell is ideal for general site lighting, loading docks, doorway, pathway and parking areas.









6 1/2"(H) x 10 1/2"(W) x 3 2/3"(D)

Features

- Back plate: Die-cast aluminum
- Multi-CCT (The switch is inside the fixture)
- Polycarbonate Housing & Lens
- 7-Year Warranty

Technical Specifications

Electrical:

Voltage: 120-277V AC 50/ 60Hz

Wattage: 15WPower Factor: >0.90

• Total Harmonic Distortion: ≤20 %

Efficacy: 120LPW

Includes Pre-wired Photo Electric Control (Dusk to Dawn)

Mechanical:

Back plate: Die-cast aluminum

Polycarbonate Housing & Lens

Operating Temperature: 31°F to 113°F

7-Year Warranty

IP65, Suitable for Wet Location

Lighting:

- Multi-CCT (The switch is inside the fixture)
- Dimming: 0-10V Dimming
- LED Type/Brand: 2835LUMILEDS
- Front: Polycarbonate Lens and Housing
- Total Lumens: 1800LM
- Color Temperatures: 3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 100°
- Rated life: 70,000 Hrs

Applications:

- Entrance lighting, courtyard lighting
- Industrial lighting, Outdoor landscape lighting
- Building, The hotel
- Wall lighting area and so on

Other Models:

• 15W | 1800LM | DLW-15W-MCT-BR

• 15W | 1800LM | DLW-15W-MCT-BK













Photometrics: DLW-15W-MCT-WH



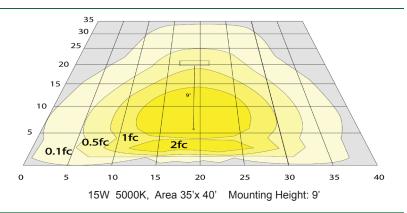

Other Views:







Side View

Front View

Back View

Performance Table: DLW-15W-MCT-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
DLW-15W-MCT-WH	15W	120-277V	1800LM	3500K 4000K 5000K	B1-U2-G1	120

Sample Ordering

Model	Wattage		C	olor Tem	Housing	
DLW	_	15W	_	MCT	_	WH

Other Models: DLW-15W-MCT-BK









Front View

Back View